

Inverter Driven Heat Pump

30,000 BTU Mid Static ducted

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- Up to .80" WC
- Two wire or Three wire Controls
- Automatic Airflow Adjustment
- Energy Efficient (up to 21.3 SEER)
- Quiet Operation (as low as 24 decibels)
- Long Lineset Lengths (up to 246')



MODEL NUMBERS	
Indoor Unit	ARU30RGLX
Outdoor Unit	AOU30RGLX
System	30RGLXD

EFFICIENCIES	
SEER	16.5
EER	10.6
HSPF	10.4
COP (kW)	3.78

OUTDOOR TEMPERATURE OPERATION RANGE		
Cooling	*F(°C)	-5 to 115 (-20 - 46)
Heating		-5 to 75 (-20 to 24)

CAPACITIES			
Cooling	Rated	BTU/hw	30,000
	Min.-Max.		9,600-35,000
Heating	Rated		32,000
	Min.-Max.		9,200-39,000

LINESET REQUIREMENTS			
Connection Method Flare			
Liquid	in (mm)	Ø 3/8 (9.52)	
		Ø 5/8 (15.88)	
Pre-Charge Length	ft (m)	65 (20)	
Minimum Length		16 (5)	
Maximum Length		164 (50)	
Max. Height Diff.		98 (30)	

INDOOR DIMENSIONS & WEIGHT			
Net (H x W x D)	in	11-13/16 x 39-3/8 x 27-9/16	
	mm	(300 x 1,000 x 700)	
Gross (H x W x D)	in	15-3/4 x 48-3/4 x 34-7/16	
	mm	(400 x 1,238 x 875)	
Net Weight	lb (kg)	93 (42)	
Gross Weight		110 (50)	

OUTDOOR DIMENSIONS & WEIGHT			
Net (H x W x D)	in	32-11/16 x 35-7/16 x 13	
	mm	830 x 900 x 330	
Gross (H x W x D)	in	39-3/8 x 41-5/16 x 17-1/2	
	mm	1,000 x 1,050 x 445	
Net Weight	lb (kg)	134 (61)	
Gross Weight		152 (69)	

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 30 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 30 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTY-RNRUZZ	Wired Remote Control
UTY-RVNUM	Wired Remote Control
UTY-RSRY	Simple Remote Control
UTY-LBTUM	IR Receiver Kit
UTY-TTRX	Third Party Thermostat Adapter
UTY-TFSXZ2	WiFi Module
UTY-XSZX	Remote Sensor



Indoor Unit ETL#: 3170288
 Outdoor Unit ETL#: 91987

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://portal.fujitsugeneral.com>

Inverter Driven Heat Pump

30,000 BTU Mid Static ducted

FAN DATA				
Indoor Unit Airflow Rate	Cooling	High	CFM (m3/h)	1001 (1700)
		Medium		800 (1360)
		Low		700 (1190)
		Quiet		630 (1070)
	Heating	High		1001 (1700)
		Medium		800 (1360)
		Low		700 (1190)
		Quiet		630 (1070)
Outdoor Unit Airflow Rate	Cooling		2,119 (3,600)	
	Heating		2,119 (3,600)	
SOUND PRESSURE				
Indoor Unit	Cooling	High	dB (A)	37
		Medium		34
		Low		30
		Quiet		29
	Heating	High		37
		Medium		34
		Low		30
		Quiet		29
Outdoor Unit	Cooling		53	
	Heating		55	
REFRIGERANT				
Type				R410A
Charge	lb oz			4 lb 10.1oz
	g			2,100
Oil Type				POE (RB68)



ELECTRICAL SPECIFICATIONS				
Voltage/Frequency/Phase			208-230V/60Hz/1	
Voltage Range			187-253 V	
Current	Cooling	Rated	A	12.4
	Heating	Rated		10.9
Maximum Operating Current		Cooling		15.6
		Heating		16.1
Starting Current			11.5	
MCA			20.8	
Maximum Circuit Breaker			30	
Input Power	Cooling	Rated	kW	2.83
		Min.-Max.		0.70-3.43
Heating	Rated	2.48		
	Min.-Max.	0.62-3.27		
Power Factor	Cooling		%	99.2
	Heating			98.9
OTHER				
Moisture Removal		pints/h (L/h)		5.1 (2.4)
Energy Star		NO		
Drain hose	Material	PVC		
Size	in (mm)	Ø 13/16 (20.7) [I.D.], Ø 1-1/16 (26.6) [O.D.] (VP25)		
Operation Range	Cooling	°F (°C)	64 to 90 (18 to 32)	
		%RH	80 or less	
	Heating	°F (°C)	60 to 86 (16 to 30)	
Static Pressure Range	in. WG		0.12 - 0.80	
	Pa		30 - 200	

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

Inverter Driven Heat Pump 30,000 BTU Mid Static ducted

DIMENSIONS

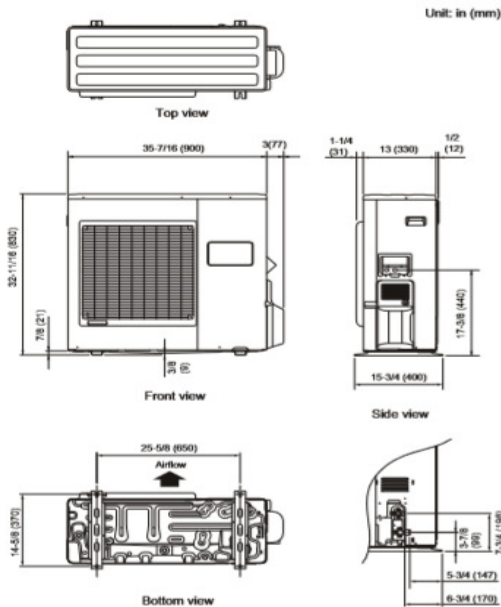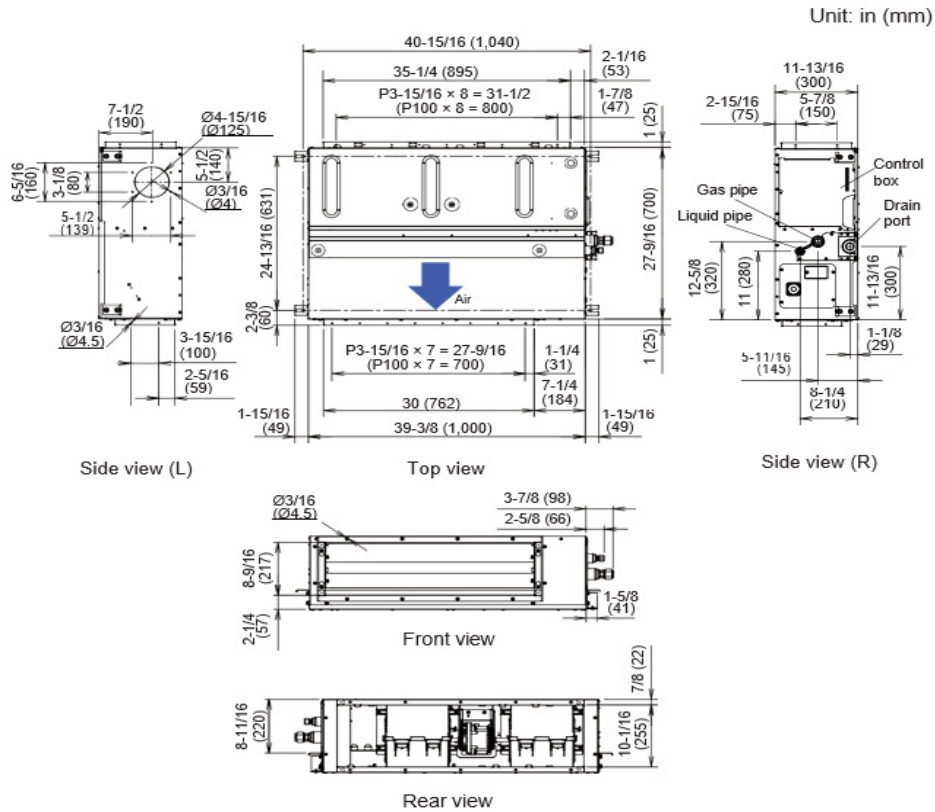

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).