


TECHNICAL MANUAL

*PG13

R410A Single Phase Package Gas Units

- Refer to Service Manual RS6300007 for installation, operation, and troubleshooting information.
- All safety information must be followed as provided in the Service Manual.
- Refer to the appropriate Parts Catalog for part number information.
- Models listed on page 3.




This manual is to be used by qualified, professionally trained HVAC technicians only. Goodman does not assume any responsibility for property damage or personal injury due to improper service procedures or services performed by an unqualified person.

RT6312004r8
March 2014

PRODUCT IDENTIFICATION

The model number is used for positive identification of component parts used in manufacturing. Please use this number when requesting service or parts information.

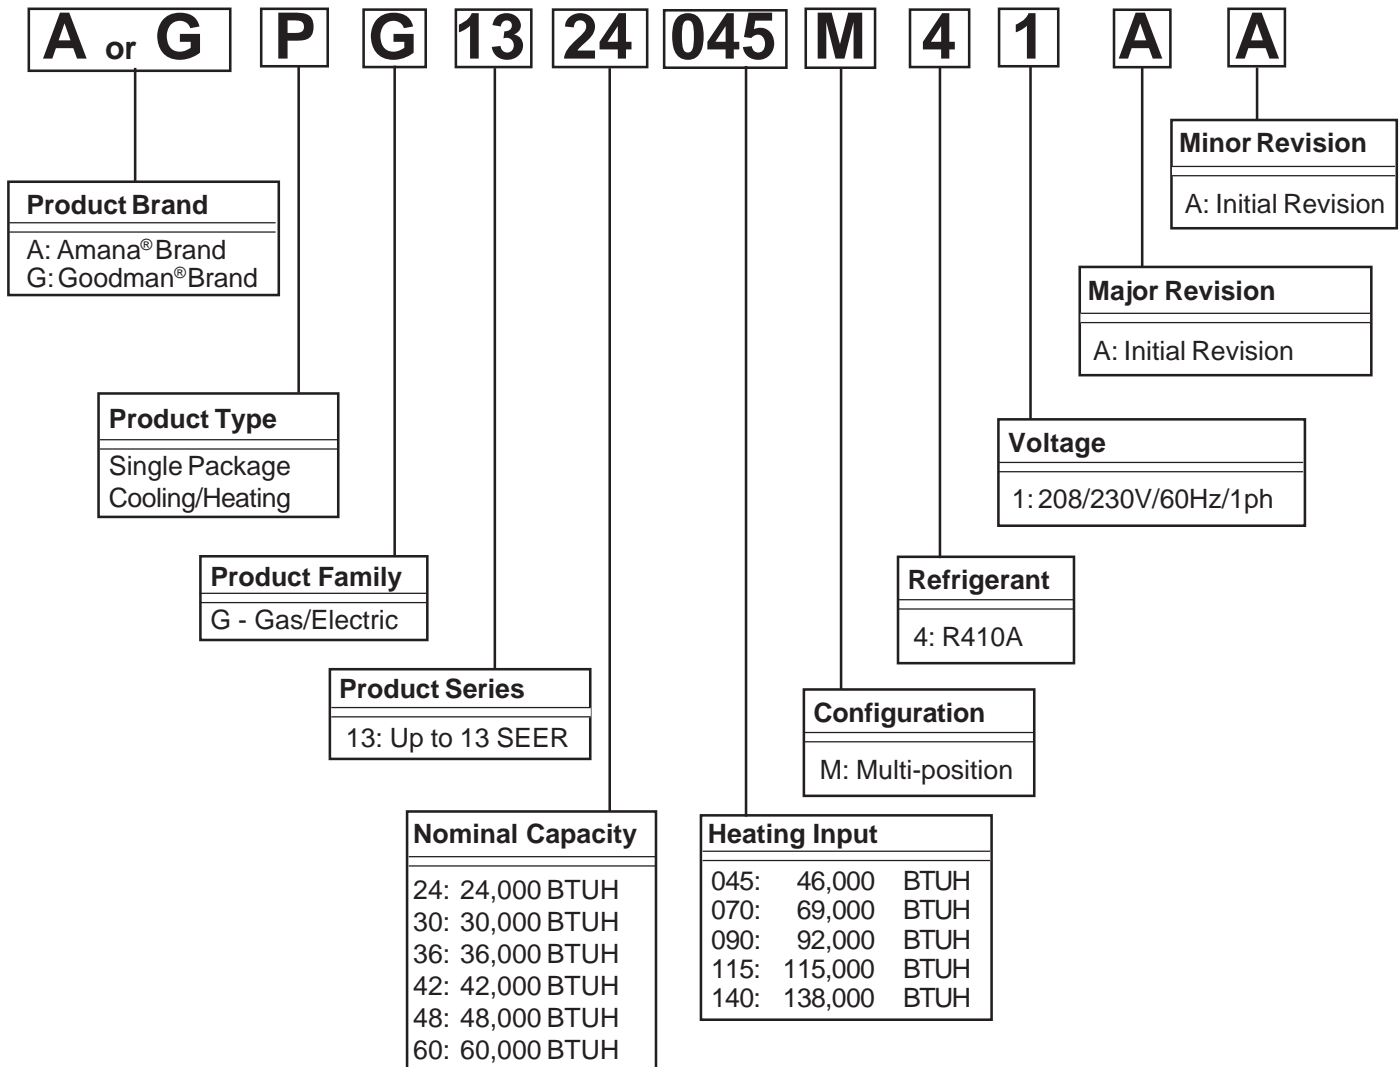

WARNING

HIGH VOLTAGE!

Disconnect ALL power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury or death.

WARNING

Goodman will not be responsible for any injury or property damage arising from improper service or service procedures. If you install or perform service on this unit, you assume responsibility for any personal injury or property damage which may result. Many jurisdictions require a license to install or service heating and air conditioning equipment.

WARNING

ONLY individuals meeting (at a minimum) the requirements of an "Entry Level Technician" as specified by the Air-Conditioning, Heating, and Refrigeration Institute (AHRI) may use this information. Attempting to install or repair this unit without such background may result in product damage, personal injury, or death.

PRODUCT IDENTIFICATION

The model number is used for positive identification of component parts used in manufacturing. Please use this number when requesting service or parts information.

| | |
|-----------------|-----------------|
| *PG1324045M41A* | *PG1336045M41CA |
| *PG1324070M41A* | *PG1336070M41CA |
| *PG1330045M41A* | *PG1336090M41CA |
| *PG1330070M41A* | |
| *PG1336045M41A* | APG1324045M41DA |
| *PG1336070M41A* | APG1324070M41DA |
| *PG1336090M41A* | |
| *PG1342070M41A* | *PG1342070M41DA |
| *PG1342090M41A* | *PG1342090M41DA |
| *PG1348070M41A* | |
| *PG1348090M41A* | *PG1348070M41EA |
| *PG1348115M41A* | *PG1348090M41EA |
| *PG1360090M41A* | *PG1348115M41EA |
| *PG1360115M41A* | |
| *PG1360140M41A* | |

5MM

*5mm model specific
information begins on page 38*



WARNING

The United States Environmental Protection Agency ("EPA") has issued various regulations regarding the introduction and disposal of refrigerants introduced into this unit. Failure to follow these regulations may harm the environment and can lead to the imposition of substantial fines. These regulations may vary by jurisdiction. Should questions arise, contact your local EPA office.



WARNING

Do not connect or use any device that is not design certified by Goodman for use with this unit. Serious property damage, personal injury, reduced unit performance and/or hazardous conditions may result from the use of such non-approved devices.



WARNING

To prevent the risk of property damage, personal injury, or death, do not store combustible materials or use gasoline or other flammable liquids or vapors in the vicinity of this appliance.

PRODUCT DESIGN

*PG13 Package Gas Units are designed for outdoor installations only in either residential or light commercial applications and are available in 2 through 5 ton sizes. They are designed for 208/230 volt single phase applications. (*PG13 3, 4 and 5 ton models are also available for 230V 3 phase applications. See Technical Manual RT6312005*.)

The connecting ductwork (Supply and Return) can be connected for either horizontal or vertical airflow. In the vertical application, a matching Roof Curb is recommended.

A return air filter must be installed behind the return air grille(s) or provision must be made for a filter in an accessible location within the return air duct. The minimum filter area should not be less than those sizes listed in the Specification Section. Under no circumstances should the unit be operated without return air filters.

A 3/4" pipe is provided for removal of condensate water from the indoor coil. (Do not reduce the drain line size).

NOTE: Tighten drain to a maximum torque of 10 in-lbs

Refrigerant flow control is achieved by use of restrictor orifices. *PG13 units use the FasTest Access Fitting System which consists of a saddle that is either soldered to the suction and liquid lines or is fastened with a locking nut to the access fitting box (core) and then screwed into the saddle.

NOTE: The core must not be removed from the saddle until the refrigerant charge has been removed. Failure to do so could result in property damage or personal injury.

The single phase units use permanent split capacitors (PSC) design compressors. Starting components are therefore not required. A low MFD run capacitor assists the compressor to start and remains in the circuit during operation.

The outdoor fan and indoor blower motors are single phase permanent split capacitor type motors. *PG1348**M41** and *PG1360**M41** models are equipped with X-13 indoor blower motors. X-13 motors are constant torque motors with very low power consumption and are energized by a 24V signal from the ignition control. The X-13 features an integrated control module.

Air for condensing (cooling cycle) is drawn through the outdoor coil by a propeller fan, and is discharged vertically out the top of the unit. The outdoor coil is designed for .0 static. No additional restriction (ductwork) shall be applied.


Conditioned air is drawn through the filter(s), field installed, across the coil and back into the conditioned space by the indoor blower.

Some models of the *PG13 series package units use the Compliant Scroll compressor, there are a number of design characteristics which are different from the traditional reciprocating compressor.

- Due to their design Scroll compressors are inherently more tolerant of liquid refrigerant. **NOTE:** Even though the compressor section of a Scroll compressor is more tolerant of liquid refrigerant, continued floodback or flooded start conditions may wash oil from the bearing surfaces causing premature bearing failure.
- These Scroll compressors use white oil which is compatible with 3GS. 3GS oil may be used if additional oil is required.
- Compliant scroll compressors perform "quiet" shutdowns that allow the compressor to restart immediately without the need for a time delay. This compressor will restart even if the system has not equalized.
- Operating pressures and amp draws may differ from standard reciprocating compressors. This information may be found in the "Cooling Performance Data" section.

Location and Clearances


NOTE: To ensure proper condensate drainage, unit must be installed in a level position.



Outside Slab Installation

NOTE: Roof overhang should be no more than 36" and provision made to deflect the warm discharge air out from the overhang. Minimum clearances are required to avoid air recirculation and keep the unit operating at peak efficiency.

PRODUCT DESIGN



Rooftop Installation

NOTE: To ensure proper condensate drainage, unit must be installed in a level position.

WARNING

TO PREVENT POSSIBLE PROPERTY DAMAGE, THE UNIT SHOULD REMAIN IN AN UPRIGHT POSITION DURING ALL RIGGING AND MOVING OPERATIONS. TO FACILITATE LIFTING AND MOVING IF A CRANE IS USED, PLACE THE UNIT IN AN ADEQUATE CABLE SLING.

IMPORTANT: If using bottom discharge with roof curb, ductwork should be attached to the curb prior to installing the unit.

Refer to Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual.

PRODUCT DESIGN

High Altitude Derate - U.S. Installations Only (Optional)
High Altitude Derate is not required for proper operation. The gas/electric units naturally derate with altitude. High Altitude Derate kit may be installed if desired.

IMPORTANT NOTE: The gas/electric units naturally derate with altitude. Do not attempt to increase the firing rate by changing orifices or increasing the manifold pressure. This can cause poor combustion and equipment failure. At all altitudes, the manifold pressure must be within 0.3 inches W.C. of that listed on the nameplate for the fuel used. At all altitudes and with either fuel, the air temperature rise must be within the range listed on the unit nameplate. Refer to the Installation Manual provided with the LP kit for conversion from natural gas to propane gas and for altitude adjustments.

When this package unit is installed at high altitude, the appropriate High Altitude orifice kit may be installed. As altitude increases, there is a natural reduction in the density of both the gas fuel and combustion air. This kit will provide the proper design certified input rate within the specified altitude range. High altitude kits are not approved for use in Canada. For installations above 2,000 feet, use kit HA-02. The HA-02 kit is used for both Natural and LP gas at high altitudes.

Use *LPT-03 propane conversion kit for propane conversions at altitudes below 2000 feet. Natural gas installations below 2000 feet do not require a kit.

For propane conversion above 2000 feet, high altitude kit HA-02 is required in addition to the *LPT-03 propane conversion kit.

**LPT-00A may be used on models with AA revisions.*

NATURAL GAS AND LP GAS INSTALLATIONS AT ALTITUDES > 2000 FT


| INPUT/BURNER | HIGH ALTITUDE KIT | 20,000 BTUH NAT/20,000 BTUH/L.P. | | | | | | | |
|-----------------------|-------------------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | ELEVATION ABOVE SEA-LEVEL (FEET) | | | | | | | |
| | | 2000 | 3000 | 4000 | 4500 | 5000 | 6000 | 7000 | 8000 |
| U.S. BURNER ORIFICE | HA-02 | 45/55 | 47/55 | 47/56 | - | 47/56 | 48/57 | 48/58 | 49/58 |
| CANADA BURNER ORIFICE | | 45/55 | - | - | 48/57 | - | - | - | - |

| INPUT/BURNER | HIGH ALTITUDE KIT | 22,500 BTUH NAT/20,000 BTUH/L.P. | | | | | | | |
|-----------------------|-------------------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | ELEVATION ABOVE SEA-LEVEL (FEET) | | | | | | | |
| | | 2000 | 3000 | 4000 | 4500 | 5000 | 6000 | 7000 | 8000 |
| U.S. BURNER ORIFICE | HA-02 | 44/55 | 44/55 | 45/56 | - | 45/56 | 46/57 | 47/58 | 47/58 |
| CANADA BURNER ORIFICE | | 44/55 | - | - | 47/57 | - | - | - | - |

| INPUT/BURNER | HIGH ALTITUDE KIT | 25,000 BTUH NAT/20,000 BTUH/L.P. | | | | | | | |
|-----------------------|-------------------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | ELEVATION ABOVE SEA-LEVEL (FEET) | | | | | | | |
| | | 2000 | 3000 | 4000 | 4500 | 5000 | 6000 | 7000 | 8000 |
| U.S. BURNER ORIFICE | HA-02 | 43/55 | 43/55 | 44/56 | - | 44/56 | 44/56 | 45/57 | 45/57 |
| CANADA BURNER ORIFICE | | 43/55 | - | - | 46/57 | - | - | - | - |

PRODUCT DIMENSIONS

UNIT DIMENSIONS



PACKAGE GAS SPECIFICATIONS *PG13[24-36]***M41AA/AB

| | | *PG1324045M4 AA/AB | *PG1324070M41 AA/AB | *PG1330045M4 AA/AB | *PG1330070M41 AA/AB | *PG1336045M41 AA/AB |
|--------------------------------------|---|-----------------------|------------------------|-----------------------|------------------------|------------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 23,600 | 23,600 | 28,600 | 28,600 | 36,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 | 46,000 | 69,000 | 46,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 | 36,700 | 55,000 | 36,700 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 | 30 - 60 | 35 - 65 | 30 - 60 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 11.3 | 11.3 | 13.9 | 13.9 | 21.2 |
| | MINIMUM CIRCUIT AMPACITY | 13.4 | 13.4 | 16.6 | 16.6 | 25.4 |
| | MAXIMUM OVERCURRENT PROTECTION ⁽³⁾ | 20 | 20 | 25 | 25 | 40 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 | 2 | 3 | 2 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Recip | Recip | Recip | Recip | Scroll |
| | RATED LOAD AMPS | 8.3 | 8.3 | 10.6 | 10.6 | 16.7 |
| | LOCKED ROTOR AMPS | 43.0 | 43.0 | 54.0 | 54.0 | 79.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 830 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.5 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 3.0 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 2700 | 2700 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 |
| | NUMBER OF ROWS | 1 | 1 | 1 | 1 | 1 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/4 - 3 | 1/4 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.9 | 1.9 | 3.1 |
| | LOCKED ROTOR AMPS | 2.2 | 2.2 | 3.1 | 3.1 | 4.1 |
| | MOTOR SPEED TAP - COOLING | Med | Med | Med | Med | High |
| | RPM | 952 | 952 | 1,015 | 1,015 | 910 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 9" |
| | RATED SCFM COOLING | 800 | 800 | 1000 | 1000 | 1200 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 4.33 | 4.33 | 4.33 |
| | NUMBER OF ROWS | 3 | 3 | 4 | 4 | 4 |
| | FINS PER INCH | 16 | 16 | 16 | 16 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 2.7 | 2.7 | 3.3 | 3.3 | 4.2 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.053) | Orifice (.053) | Orifice (.062) | Orifice (.062) | Orifice (.070) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 80 | 80 | 80 | 80 | 85 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 435 | 439 | 438 | 442 | 470 |
| | OPERATING WEIGHT LBS. | 412 | 417 | 415 | 420 | 449 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

* AA revision models rollout limit setting is 300°. AB revision rollout limit setting is 350°.

PACKAGE GAS SPECIFICATIONS *PG13[36-48]**M41AA/AB

| | | *PG1336070M41 AA/AB | *PG1336090M41 AA/AB | *PG1342070M41 AA/AB | *PG1342090M41 AA/AB | *PG1348070M41 AA/AB |
|--------------------------------------|---------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 36,000 | 36,000 | 40,500 | 40,500 | 46,000 |
| | SEER / EER | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 | 69,000 | 92,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 | 55,000 | 73,600 | 55,000 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 | 35 - 65 | 45 - 75 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 21.2 | 21.2 | 22.3 | 22.3 | 27.1 |
| | MINIMUM CIRCUIT AMPACITY | 25.4 | 25.4 | 26.8 | 26.8 | 32.1 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 | 40 | 40 | 50 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 | 3 | 4 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 16.7 | 16.7 | 17.9 | 17.9 | 19.9 |
| | LOCKED ROTOR AMPS | 79.0 | 79.0 | 112.0 | 112.0 | 109.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.3 | 12.3 | 15.4 | 15.4 | 15.4 |
| | NUMBER OF ROWS | 1 | 1 | 1 | 1 | 1 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 3/4 - 5 |
| | FULL LOAD AMPS | 3.06 | 3.06 | 3.06 | 3.06 | 5.8 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 | 4.1 | 4.1 | -- |
| | MOTOR SPEED TAP - COOLING | High | High | Medium | Medium | T4 |
| | RPM | 910 | 910 | 910 | 910 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 9" | 10" x 9" | 10" x 10" | 10" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1200 | 1200 | 1300 | 1300 | 1520 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 4.2 | 4.2 | 4.7 | 4.7 | 5.1 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.070) | Orifice (.070) | Orifice (.072) | Orifice (.072) | Orifice (.076) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 85 | 85 | 105 | 105 | 125 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 475 | 480 | 515 | 520 | 540 |
| | OPERATING WEIGHT LBS. | 453 | 458 | 493 | 496 | 518 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

* AA revision models rollout limit setting is 300°. AB revision rollout limit setting is 350°.

PACKAGE GAS SPECIFICATIONS *PG13[48-60]**M41AA/AB

| | | *PG1348090M41 AA/AB | *PG1348115M41 AA/AB | *PG1360090M41 AA/AB | *PG1360115M41 AA/AB | *PG1360140M41 AA/AB |
|-------------------------------------|---------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 46,000 | 46,000 | 57,000 | 57,000 | 57,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 92,000 | 115,000 | 92,000 | 115,000 | 138,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 73,600 | 92,000 | 73,600 | 92,000 | 110,400 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 45 - 75 | 45-75 | 45 - 75 | 45 - 75 | 45 - 75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 27.1 | 27.1 | 35.2 | 35.2 | 35.2 |
| | MINIMUM CIRCUIT AMPACITY | 32.1 | 32.1 | 42.0 | 42.0 | 42.0 |
| | MAXIMUM OVERCURRENT PROTECTION | 50 | 50 | 60 | 60 | 60 |
| HEATING SECTION | NUMBER OF BURNERS | 4 | 5 | 4 | 5 | 6 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 19.9 | 19.9 | 26.4 | 26.4 | 26.4 |
| | LOCKED ROTOR AMPS | 109.0 | 109.0 | 134.0 | 134.0 | 134.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 1100 | 1100 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 3500 | 3500 | 3250 | 3250 | 3250 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 15.4 | 15.4 | 15.4 | 15.4 | 15.4 |
| | NUMBER OF ROWS | 1 | 1 | 2 | 2 | 2 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 3/4 - 5 | 3/4 - 5 | 1 - 5 | 1 - 5 | 1 - 5 |
| | FULL LOAD AMPS | 5.8 | 5.8 | 7.4 | 7.4 | 7.4 |
| | LOCKED ROTOR AMPS | - | - | - | - | - |
| | MOTOR SPEED TAP - COOLING | T4 | T4 | T4 | T4 | T4 |
| | RPM | 1050 | 1050 | 1050 | 1050 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1520 | 1520 | 1750 | 1750 | 1750 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 5.67 | 5.67 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. (2) | 5.1 | 5.1 | 6.3 | 6.3 | 6.3 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.076) | Orifice (.076) | Orifice (.087) | Orifice (.087) | Orifice (.087) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 125 | 125 | 185 | 185 | 185 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 545 | 550 | 555 | 560 | 565 |
| | OPERATING WEIGHT LBS. | 523 | 528 | 533 | 538 | 543 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

* AA revision models rollout limit setting is 300°. AB revision rollout limit setting is 350°.

PACKAGE GAS SPECIFICATIONS

***PG13[24-36]**M41AD**

| | | *PG1324045M41 AD | *PG1324070M41 AD | *PG1330045M41 AD | *PG1330070M41 AD | *PG1336045M41 AD |
|--------------------------------------|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 23,600 | 23,600 | 28,600 | 28,600 | 36,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 | 46,000 | 69,000 | 46,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 | 36,700 | 55,000 | 36,700 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 | 30 - 60 | 35 - 65 | 30 - 60 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 11.3 | 11.3 | 13.9 | 13.9 | 21.2 |
| | MINIMUM CIRCUIT AMPACITY | 13.4 | 13.4 | 16.6 | 16.6 | 25.4 |
| | MAXIMUM OVERCURRENT PROTECTION ⁽³⁾ | 20 | 20 | 25 | 25 | 40 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 | 2 | 3 | 2 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Recip | Recip | Recip | Recip | Scroll |
| | RATED LOAD AMPS | 8.3 | 8.3 | 10.6 | 10.6 | 16.7 |
| | LOCKED ROTOR AMPS | 43.0 | 43.0 | 54.0 | 54.0 | 79.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 830 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.5 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 3.0 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 2700 | 2700 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 |
| | NUMBER OF ROWS | 1 | 1 | 1 | 1 | 1 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/4 - 3 | 1/4 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.9 | 1.9 | 3.1 |
| | LOCKED ROTOR AMPS | 2.2 | 2.2 | 3.1 | 3.1 | 4.1 |
| | MOTOR SPEED TAP - COOLING | Med | Med | Med | Med | High |
| | RPM | 952 | 952 | 1,015 | 1,015 | 910 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 9" |
| | RATED SCFM COOLING | 800 | 800 | 1000 | 1000 | 1200 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 4.33 | 4.33 | 4.33 |
| | NUMBER OF ROWS | 3 | 3 | 4 | 4 | 4 |
| | FINS PER INCH | 16 | 16 | 16 | 16 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 2.7 | 2.7 | 3.3 | 3.3 | 4.2 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.053) | Orifice (.053) | Orifice (.062) | Orifice (.062) | Orifice (.070) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 80 | 80 | 80 | 80 | 85 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 435 | 439 | 438 | 442 | 470 |
| | OPERATING WEIGHT LBS. | 412 | 417 | 415 | 420 | 449 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG13[36-48]***M41AD

| | | *PG1336070M41 AD | *PG1336090M41 AD | *PG1342070M41 AD | *PG1342090M41 AD | *PG1348070M41 AD |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 36,000 | 36,000 | 40,500 | 40,500 | 46,000 |
| | SEER / EER | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 | 69,000 | 92,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 | 55,000 | 73,600 | 55,000 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 | 35 - 65 | 45 - 75 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 21.2 | 21.2 | 22.3 | 22.3 | 27.1 |
| | MINIMUM CIRCUIT AMPACITY | 25.4 | 25.4 | 26.8 | 26.8 | 32.1 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 | 40 | 40 | 50 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 | 3 | 4 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 16.7 | 16.7 | 17.9 | 17.9 | 19.9 |
| | LOCKED ROTOR AMPS | 79.0 | 79.0 | 112.0 | 112.0 | 109.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.3 | 12.3 | 15.4 | 15.4 | 15.4 |
| | NUMBER OF ROWS | 1 | 1 | 1 | 1 | 1 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 3/4 - 5 |
| | FULL LOAD AMPS | 3.06 | 3.06 | 3.06 | 3.06 | 5.8 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 | 4.1 | 4.1 | -- |
| | MOTOR SPEED TAP - COOLING | High | High | Medium | Medium | T4 |
| | RPM | 910 | 910 | 910 | 910 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 9" | 10" x 9" | 10" x 10" | 10" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1200 | 1200 | 1300 | 1300 | 1520 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 4.2 | 4.2 | 4.7 | 4.7 | 5.1 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.070) | Orifice (.070) | Orifice (.072) | Orifice (.072) | Orifice (.076) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 85 | 85 | 105 | 105 | 125 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 475 | 480 | 515 | 520 | 540 |
| | OPERATING WEIGHT LBS. | 453 | 458 | 493 | 496 | 518 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG13[48-60]***M41AD

| | | *PG1348090M41 AD | *PG1348115M41 AD | *PG1360090M41 AD | *PG1360115M41 AD | *PG1360140M41 AD |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 46,000 | 46,000 | 57,000 | 57,000 | 57,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 92,000 | 115,000 | 92,000 | 115,000 | 138,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 73,600 | 92,000 | 73,600 | 92,000 | 110,400 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 45 - 75 | 45-75 | 45 - 75 | 45 - 75 | 45 - 75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 27.1 | 27.1 | 35.4 | 35.4 | 35.4 |
| | MINIMUM CIRCUIT AMPACITY | 32.1 | 32.1 | 42.0 | 42.0 | 42.0 |
| | MAXIMUM OVERCURRENT PROTECTION | 50 | 50 | 60 | 60 | 60 |
| HEATING SECTION | NUMBER OF BURNERS | 4 | 5 | 4 | 5 | 6 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 19.9 | 19.9 | 26.4 | 26.4 | 26.4 |
| | LOCKED ROTOR AMPS | 109.0 | 109.0 | 134.0 | 134.0 | 134.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 1100 | 1100 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 3500 | 3500 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 15.4 | 15.4 | 15.4 | 15.4 | 15.4 |
| | NUMBER OF ROWS | 1 | 1 | 2 | 2 | 2 |
| | FINS PER INCH | 24 | 24 | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 3/4 - 5 | 3/4 - 5 | 1 - 5 | 1 - 5 | 1 - 5 |
| | FULL LOAD AMPS | 5.8 | 5.8 | 7.6 | 7.6 | 7.6 |
| | LOCKED ROTOR AMPS | -- | -- | -- | -- | -- |
| | MOTOR SPEED TAP - COOLING | T4 | T4 | T4 | T4 | T4 |
| | RPM | 1050 | 1050 | 1050 | 1050 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1550 | 1550 | 1750 | 1750 | 1750 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 5.67 | 5.67 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 5.1 | 5.1 | 6.3 | 6.3 | 6.3 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.076) | Orifice (.076) | Orifice (.087) | Orifice (.087) | Orifice (.087) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 125 | 125 | 185 | 185 | 185 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 545 | 550 | 555 | 560 | 565 |
| | OPERATING WEIGHT LBS. | 523 | 528 | 533 | 538 | 543 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG1336[045-090]M41CA

| | | *PG1336045M41 CA | *PG1336070M41 CA | *PG1336090M41 CA |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 35,000 | 35,000 | 35,000 |
| | SEER / EER | 13.0 / 11 | 13.0 / 11 | 13.0 / 11 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 | 92,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 | 73,600 |
| | AFUE (%) | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 | 45 - 75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 21.2 | 21.2 | 21.2 |
| | MINIMUM CIRCUIT AMPACITY | 25.4 | 25.4 | 25.4 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 | 40 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 | 4 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 16.7 | 16.7 | 16.7 |
| | LOCKED ROTOR AMPS | 79.0 | 79.0 | 79.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 830 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.5 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 3.0 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.2 | 12.2 | 12.2 |
| | NUMBER OF ROWS | 2 | 2 | 2 |
| | FINS PER INCH | 16 | 16 | 16 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 |
| | FULL LOAD AMPS | 3.1 | 3.06 | 3.06 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 | 4.1 |
| | MOTOR SPEED TAP - COOLING | High | High | High |
| | RPM | 910 | 910 | 910 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 9" | 10" x 9" | 10" x 9" |
| | RATED SCFM COOLING | 1200 | 1200 | 1200 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 4.33 |
| | NUMBER OF ROWS | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 4.2 | 4.2 | 4.2 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.072) | Orifice (.072) | Orifice (.072) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 108 | 108 | 108 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 481 | 486 | 491 |
| | OPERATING WEIGHT LBS. | 460 | 464 | 469 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

APG1324[045-070]M41D*

| | | APG1324045M41 D* | APG1324070M41 D* |
|--------------------------------------|---|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 23,600 | 23,600 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 |
| | AFUE (%) | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 16.1 | 16.1 |
| | MINIMUM CIRCUIT AMPACITY | 19.5 | 19.5 |
| | MAXIMUM OVERCURRENT PROTECTION ⁽³⁾ | 30 | 30 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll |
| | RATED LOAD AMPS | 13.5 | 13.5 |
| | LOCKED ROTOR AMPS | 58.3 | 58.3 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/6 | 1/6 |
| | RPM | 830 | 830 |
| | FULL LOAD AMPS | 1.1 | 1.1 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 |
| | CFM | 2400 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.31 | 12.31 |
| | NUMBER OF ROWS | 1 | 1 |
| | FINS PER INCH | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/4 - 3 | 1/4 - 3 |
| | FULL LOAD AMPS | 1.5 | 1.5 |
| | LOCKED ROTOR AMPS | 2.1 | 2.1 |
| | MOTOR SPEED TAP - COOLING | Med | Med |
| | RPM | 952 | 952 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 8" | 10" x 8" |
| | RATED SCFM COOLING | 800 | 800 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 |
| | NUMBER OF ROWS | 3 | 3 |
| | FINS PER INCH | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 2.7 | 2.7 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.057) | Orifice (.057) |
| | REFRIGERANT CHARGE R-410A (Oz) | 75 | 75 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 420 | 425 |
| | OPERATING WEIGHT LBS. | 396 | 397 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

PG1342[070-090]M41D

| | | *PG1342070M41 D* | *PG1342090M41 D* |
|--------------------------------------|---------------------------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 40,500 | 40,500 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 |
| | AFUE (%) | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 22.3 | 22.3 |
| | MINIMUM CIRCUIT AMPACITY | 26.8 | 26.8 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 |
| | ORIFICE SIZE NATURAL | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll |
| | RATED LOAD AMPS | 17.9 | 17.9 |
| | LOCKED ROTOR AMPS | 112.0 | 112.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 |
| | RPM | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 |
| | CFM | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 15.36 | 15.36 |
| | NUMBER OF ROWS | 1 | 1 |
| | FINS PER INCH | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 |
| | FULL LOAD AMPS | 3.06 | 3.06 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 |
| | MOTOR SPEED TAP - COOLING | Medium | Medium |
| | RPM | 910 | 910 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 10" | 10" x 10" |
| | RATED SCFM COOLING | 1300 | 1300 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 |
| EVAPORATOR COIL (ALUMINUM) | FACE AREA - SQ. FT. | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 |
| | FINS PER INCH | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 4.7 | 4.7 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.072) | Orifice (.072) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 99 | 99 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 515 | 520 |
| | OPERATING WEIGHT LBS. | 493 | 496 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

PG1348[070-115]M41E

| | | *PG1348070M41 E* | *PG1348090M41 E* | *PG1348115M41 E* |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 46,000 | 46,000 | 46,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 | 115,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 | 92,000 |
| | AFUE (%) | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 | 45-75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 27.1 | 27.1 | 27.1 |
| | MINIMUM CIRCUIT AMPACITY | 32.1 | 32.1 | 32.1 |
| | MAXIMUM OVERCURRENT PROTECTION | 50 | 50 | 50 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 | 5 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 19.9 | 19.9 | 19.9 |
| | LOCKED ROTOR AMPS | 109.0 | 109.0 | 109.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 |
| | RPM | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 |
| | CFM | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 15.36 | 15.36 | 15.36 |
| | NUMBER OF ROWS | 1 | 1 | 1 |
| | FINS PER INCH | 24 | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 3/4 - 5 | 3/4 - 5 | 3/4 - 5 |
| | FULL LOAD AMPS | 5.8 | 5.8 | 5.8 |
| | LOCKED ROTOR AMPS | -- | -- | -- |
| | MOTOR SPEED TAP - COOLING | T4 | T4 | T4 |
| | RPM | 1050 | 1050 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 11" x 10" | 11" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1520 | 1550 | 1550 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. (2) | 5.1 | 5.1 | 5.1 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.076) | Orifice (.076) | Orifice (.076) |
| | REFRIGERANT CHARGE R-410A (Oz) | 99 | 99 | 99 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 540 | 545 | 550 |
| | OPERATING WEIGHT LBS. | 518 | 523 | 528 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

ACCESSORIES

| ACCESSORIES | |
|-----------------|---|
| Part Number | Description |
| LPT-03 | Propane Conversion Kit <i>(LPT-00A may be used on models with AA revisions)</i> |
| HA-02 | High Altitude Kit |
| PGC101/102/103 | Roof Curb |
| PGED101/102 | Downflow Economizer, Small and Medium Chassis |
| PGED103 | Downflow Economizer, Large Chassis |
| PGEH101/102 | Horizontal Economizer, Small and Medium Chassis |
| PGEH103 | Horizontal Economizer, Large Chassis |
| PGMDD101/102 | Manual 25% Fresh Air Damper Downflow Application, Small and Medium Chassis |
| PGMDD103 | Manual 25% Fresh Air Damper Downflow Application, Large Chassis |
| PGMDH101 | Manual 25% Fresh Air Damper Horizontal Application, Small Chassis |
| PGMDH102 | Manual 25% Fresh Air Damper Horizontal Application, Medium Chassis |
| PGMDH103 | Manual 25% Fresh Air Damper Horizontal Application, Large Chassis |
| PGMDMD101/102 | Motorized 25% Fresh Air Damper Downflow Application, Small and Medium Chassis |
| PGMDMD103 | Motorized 25% Fresh Air Downflow Application, Large Chassis |
| PGMDMH101 | Motorized 25% Fresh Air Damper Horizontal Application, Small Chassis |
| PGMDMH102 | Motorized 25% Fresh Air Damper Horizontal Application, Medium Chassis |
| PGMDMH103 | Motorized 25% Fresh Air Damper Horizontal Application, Large Chassis |
| SQRPG101/102 | Square to Round Adapter w/ 16" Round Downflow Application, Small and Medium Chassis |
| SQRPG103 | Square to Round Adapter w/ 18" Round Downflow Application, Large Chassis |
| SQRPGH101/102 | Square to Round Adapter w/ 16" Round Horizontal Application, Small and Medium Chassis |
| SQRPGH103 | Square to Round Adapter w/ 18" Round Horizontal Application, Large Chassis |
| PGFR101/102/103 | Internal Filter Rack All Chassis |
| GPGHFR101-103 | External Horizontal Filter Rack for Goodman/Amana Gas/Electric & Multi-position Package Units All Chassis |
| CDK36 | Flush Mount Concentric Duct Kit |
| CDK36515 | Flush Mount Concentric Duct Kit w/ Filter |
| CDK36530 | Step Down Concentric Duct Kit |
| CDK36535 | Step Down Concentric Duct Kit w/ Filter |
| CDK482 | Flush Mount Concentric Duct Kit |
| CDK482515 | Flush Mount Concentric Duct Kit w/ Filter |
| CDK482530 | Step Down Concentric Duct Kit |
| CDK482535 | Step Down Concentric Duct Kit w/ Filter |

BLOWER PERFORMANCE DATA

| *PG1324045M41A* - Rise Range: 30° - 60° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|-------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 600 | 150 | 0.67 | 57 | 850 | 230 | 1.02 | 40 | 1,190 | 380 | 1.67 | NR |
| 0.2 | 570 | 140 | 0.65 | 60 | 830 | 220 | 1.00 | 41 | 1,140 | 360 | 1.62 | NR |
| 0.3 | 510 | 130 | 0.63 | NR | 765 | 215 | 0.97 | 45 | 1,080 | 350 | 1.58 | 32 |
| 0.4 | 450 | 125 | 0.61 | NR | 715 | 210 | 0.94 | 48 | 1,025 | 340 | 1.54 | 33 |
| 0.5 | 380 | 120 | 0.58 | NR | 660 | 205 | 0.90 | 52 | 975 | 330 | 1.38 | 35 |
| 0.6 | ----- | ----- | ----- | NR | 610 | 195 | 0.88 | 56 | 920 | 310 | 1.37 | 37 |
| 0.7 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 830 | 300 | 1.35 | 41 |
| 0.8 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 730 | 290 | 1.32 | 47 |

| *PG1324070M41A* - Rise Range: 35° - 65° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|-------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 600 | 150 | 0.67 | NR | 850 | 230 | 1.02 | NR | 1,190 | 380 | 1.67 | 43 |
| 0.2 | 570 | 140 | 0.65 | NR | 830 | 220 | 1.00 | NR | 1,140 | 360 | 1.62 | 45 |
| 0.3 | 510 | 130 | 0.63 | NR | 765 | 215 | 0.97 | NR | 1,080 | 350 | 1.58 | 47 |
| 0.4 | 450 | 125 | 0.61 | NR | 715 | 210 | 0.94 | NR | 1,025 | 340 | 1.54 | 50 |
| 0.5 | 380 | 120 | 0.58 | NR | 660 | 205 | 0.90 | NR | 975 | 330 | 1.38 | 52 |
| 0.6 | ----- | ----- | ----- | NR | 610 | 195 | 0.88 | NR | 920 | 310 | 1.37 | 56 |
| 0.7 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 830 | 300 | 1.35 | 62 |
| 0.8 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 730 | 290 | 1.32 | NR |

| *PG1330045M41A* - Rise Range: 30° - 60° | | | | | | | | | | | | |
|---|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,056 | 350 | 1.51 | 33 | 1,261 | 452 | 1.95 | NR | 1,370 | 509 | 2.23 | NR |
| 0.2 | 1,010 | 339 | 1.43 | 34 | 1,221 | 442 | 1.90 | NR | 1,310 | 492 | 2.13 | NR |
| 0.3 | 971 | 343 | 1.45 | 36 | 1,174 | 428 | 1.84 | NR | 1,262 | 489 | 2.09 | NR |
| 0.4 | 937 | 329 | 1.41 | 37 | 1,125 | 414 | 1.80 | 31 | 1,208 | 475 | 2.06 | NR |
| 0.5 | 878 | 318 | 1.27 | 39 | 1,063 | 398 | 1.70 | 32 | 1,140 | 453 | 1.93 | 30 |
| 0.6 | 811 | 306 | 1.29 | 43 | 1,004 | 380 | 1.66 | 34 | 1,081 | 440 | 1.90 | 32 |
| 0.7 | 723 | 291 | 1.21 | 48 | 919 | 368 | 1.59 | 38 | 1,006 | 425 | 1.88 | 34 |
| 0.8 | 545 | 259 | 1.10 | NR | 796 | 371 | 1.46 | 43 | 879 | 403 | 1.74 | 39 |

| *PG133070M41A* - Rise Range: 35° - 65° | | | | | | | | | | | | |
|--|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,056 | 350 | 1.51 | 49 | 1,261 | 452 | 1.95 | 41 | 1,370 | 509 | 2.23 | 38 |
| 0.2 | 1,010 | 339 | 1.43 | 51 | 1,221 | 442 | 1.90 | 42 | 1,310 | 492 | 2.13 | 40 |
| 0.3 | 971 | 343 | 1.45 | 53 | 1,174 | 428 | 1.84 | 44 | 1,262 | 489 | 2.09 | 41 |
| 0.4 | 937 | 329 | 1.41 | 55 | 1,125 | 414 | 1.80 | 46 | 1,208 | 475 | 2.06 | 43 |
| 0.5 | 878 | 318 | 1.27 | 59 | 1,063 | 398 | 1.70 | 49 | 1,140 | 453 | 1.93 | 45 |
| 0.6 | 811 | 306 | 1.29 | 64 | 1,004 | 380 | 1.66 | 52 | 1,081 | 440 | 1.90 | 48 |
| 0.7 | 723 | 291 | 1.21 | NR | 919 | 368 | 1.59 | 56 | 1,006 | 425 | 1.88 | NR |
| 0.8 | 545 | 259 | 1.10 | NR | 796 | 371 | 1.46 | 65 | 879 | 403 | 1.74 | NR |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

*PG1336***M41(A/C)*

*PG1342***M41A/D*

| *PG1336045M41A* - Rise Range: 30 -60° | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 34 | 1,337 | 471 | 2.08 | NR | 1,462 | 596 | 2.64 | NR |
| 0.2 | 982 | 334 | 1.46 | 35 | 1,265 | 452 | 2.01 | NR | 1,398 | 563 | 2.58 | NR |
| 0.3 | 946 | 329 | 1.40 | 36 | 1,227 | 448 | 1.97 | NR | 1,326 | 550 | 2.50 | NR |
| 0.4 | 888 | 313 | 1.38 | 39 | 1,159 | 429 | 1.87 | 30 | 1,260 | 534 | 2.42 | NR |
| 0.5 | 823 | 304 | 1.29 | 42 | 1,073 | 405 | 1.73 | 32 | 1,188 | 513 | 2.34 | NR |
| 0.6 | 750 | 287 | 1.23 | 46 | 1,008 | 393 | 1.71 | 34 | 1,090 | 496 | 2.22 | 32 |
| 0.7 | 668 | 271 | 1.16 | 52 | 895 | 371 | 1.61 | 39 | 997 | 478 | 2.18 | 35 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 45 | 852 | 454 | 2.12 | 40 |

| *PG1336070M41A* - Rise Range: 35° -65° | | | | | | | | | | | | |
|--|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 50 | 1,337 | 471 | 2.08 | 39 | 1,462 | 596 | 2.64 | 35 |
| 0.2 | 982 | 334 | 1.46 | 53 | 1,265 | 452 | 2.01 | 41 | 1,398 | 563 | 2.58 | 37 |
| 0.3 | 946 | 329 | 1.40 | 55 | 1,227 | 448 | 1.97 | 42 | 1,326 | 550 | 2.50 | 39 |
| 0.4 | 888 | 313 | 1.38 | 58 | 1,159 | 429 | 1.87 | 45 | 1,260 | 534 | 2.42 | 41 |
| 0.5 | 823 | 304 | 1.29 | 63 | 1,073 | 405 | 1.73 | 48 | 1,188 | 513 | 2.34 | 44 |
| 0.6 | 750 | 287 | 1.23 | NR | 1,008 | 393 | 1.71 | 51 | 1,090 | 496 | 2.22 | 47 |
| 0.7 | 668 | 271 | 1.16 | NR | 895 | 371 | 1.61 | 58 | 997 | 478 | 2.18 | 52 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 68 | 852 | 454 | 2.12 | 61 |

| *PG1336090M41A* - Rise Range: 45° -75° | | | | | | | | | | | | |
|--|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 50 | 1,337 | 471 | 2.08 | NR | 1,462 | 596 | 2.64 | NR |
| 0.2 | 982 | 334 | 1.46 | 53 | 1,265 | 452 | 2.01 | NR | 1,398 | 563 | 2.58 | NR |
| 0.3 | 946 | 329 | 1.40 | 55 | 1,227 | 448 | 1.97 | NR | 1,326 | 550 | 2.50 | NR |
| 0.4 | 888 | 313 | 1.38 | 58 | 1,159 | 429 | 1.87 | 45 | 1,260 | 534 | 2.42 | NR |
| 0.5 | 823 | 304 | 1.29 | 63 | 1,073 | 405 | 1.73 | 48 | 1,188 | 513 | 2.34 | NR |
| 0.6 | 750 | 287 | 1.23 | 69 | 1,008 | 393 | 1.71 | 51 | 1,090 | 496 | 2.22 | 47 |
| 0.7 | 668 | 271 | 1.16 | NR | 895 | 371 | 1.61 | 58 | 997 | 478 | 2.18 | 52 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 68 | 852 | 454 | 2.12 | 61 |

| *PG1342070M41A* - Rise Range: 35° - 65° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,100 | 340 | 1.55 | 46 | 1,450 | 480 | 2.15 | 35 | 1,575 | 585 | 2.64 | NR |
| 0.2 | 1,040 | 325 | 1.49 | 49 | 1,390 | 460 | 2.06 | 37 | 1,515 | 565 | 2.58 | NR |
| 0.3 | 1,000 | 320 | 1.44 | 51 | 1,300 | 445 | 1.98 | 39 | 1,430 | 550 | 2.50 | 36 |
| 0.4 | 925 | 305 | 1.38 | 55 | 1,215 | 425 | 1.89 | 42 | 1,340 | 525 | 2.42 | 38 |
| 0.5 | 860 | 290 | 1.32 | 59 | 1,115 | 395 | 1.79 | 46 | 1,240 | 505 | 2.34 | 41 |
| 0.6 | 800 | 275 | 1.22 | 64 | 1,030 | 375 | 1.71 | 50 | 1,130 | 465 | 2.22 | 45 |
| 0.7 | 690 | 255 | 1.16 | NR | 945 | 350 | 1.60 | 54 | 1,010 | 450 | 2.18 | 51 |
| 0.8 | ----- | ----- | ----- | NR | 860 | 335 | 1.54 | 59 | 910 | 430 | 2.12 | 56 |

| *PG1342090M41A* - Rise Range: 45° - 75° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,100 | 340 | 1.55 | 62 | 1,450 | 480 | 2.15 | 47 | 1,575 | 585 | 2.64 | NR |
| 0.2 | 1,040 | 325 | 1.49 | 66 | 1,390 | 460 | 2.06 | 49 | 1,515 | 565 | 2.58 | 45 |
| 0.3 | 1,000 | 320 | 1.44 | 68 | 1,300 | 445 | 1.98 | 52 | 1,430 | 550 | 2.50 | 48 |
| 0.4 | 925 | 305 | 1.38 | 74 | 1,215 | 425 | 1.89 | 56 | 1,340 | 525 | 2.42 | 51 |
| 0.5 | 860 | 290 | 1.32 | NR | 1,115 | 395 | 1.79 | 61 | 1,240 | 505 | 2.34 | 55 |
| 0.6 | 800 | 275 | 1.22 | NR | 1,030 | 375 | 1.71 | 66 | 1,130 | 465 | 2.22 | 60 |
| 0.7 | 690 | 255 | 1.16 | NR | 945 | 350 | 1.60 | 72 | 1,010 | 450 | 2.18 | 67 |
| 0.8 | ----- | ----- | ----- | NR | 860 | 335 | 1.54 | NR | 910 | 430 | 2.12 | 75 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1348M41A/E***

| *PG1348070M41A* - Rise Range: 35° - 65° | | | | | | | | | | | | |
|---|------------------|-------|-------|-------|------------------|-------|-------|-------|------------------|-------|-------|-------|
| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | 1.07 | 56 | 1,105 | 186 | 1.56 | 46 | 1,397 | 323 | 2.57 | NR |
| 0.3 | 822 | 134 | 1.14 | 62 | 1,024 | 193 | 1.60 | 50 | 1,346 | 331 | 2.67 | NR |
| 0.4 | 733 | 140 | 1.20 | 69 | 967 | 202 | 1.65 | 53 | 1,288 | 342 | 2.76 | NR |
| 0.5 | 664 | 150 | 1.26 | NR | 884 | 214 | 1.76 | 58 | 1,273 | 352 | 2.82 | NR |
| 0.6 | 606 | 154 | 1.28 | NR | 816 | 220 | 1.75 | 62 | 1,178 | 359 | 2.88 | NR |
| 0.7 | 584 | 162 | 1.32 | NR | 769 | 230 | 1.85 | 66 | 1,120 | 369 | 2.97 | 45 |
| 0.8 | 551 | 164 | 1.34 | NR | 698 | 236 | 1.89 | 73 | 1,057 | 381 | 3.09 | 48 |

| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|-------|------------------|-------|-------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 3.55 | 1,669 | 532 | 4.22 |
| 0.3 | 1,545 | 463 | 3.69 | 1,654 | 239 | 4.25 |
| 0.4 | 1,506 | 476 | 3.82 | 1,610 | 551 | 4.30 |
| 0.5 | 1,448 | 481 | 3.87 | 1,545 | 557 | 4.36 |
| 0.6 | 1,400 | 493 | 3.95 | 1,512 | 566 | 4.41 |
| 0.7 | 1,341 | 502 | 4.00 | 1,433 | 578 | 4.59 |
| 0.8 | 1289 | 511 | 4.11 | 1,392 | 591 | 4.65 |

| *PG1348090M41A* - Rise Range: 45° - 75° | | | | | | | | | | | | |
|---|------------------|-------|-------|-------|------------------|-------|-------|-------|------------------|-------|-------|-------|
| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | 1.07 | 75 | 1,105 | 186 | 1.56 | 62 | 1,397 | 323 | 2.57 | 49 |
| 0.3 | 822 | 134 | 1.14 | NR | 1,024 | 193 | 1.60 | 67 | 1,346 | 331 | 2.67 | 51 |
| 0.4 | 733 | 140 | 1.20 | NR | 967 | 202 | 1.65 | 71 | 1,288 | 342 | 2.76 | 53 |
| 0.5 | 664 | 150 | 1.26 | NR | 884 | 214 | 1.76 | NR | 1,273 | 352 | 2.82 | 54 |
| 0.6 | 606 | 154 | 1.28 | NR | 816 | 220 | 1.75 | NR | 1,178 | 359 | 2.88 | 58 |
| 0.7 | 584 | 162 | 1.32 | NR | 769 | 230 | 1.85 | NR | 1,120 | 369 | 2.97 | 61 |
| 0.8 | 551 | 164 | 1.34 | NR | 698 | 236 | 1.89 | NR | 1,057 | 381 | 3.09 | 65 |

| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|-------|------------------|-------|-------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 3.55 | 1,669 | 532 | 4.22 |
| 0.3 | 1,545 | 463 | 3.69 | 1,654 | 239 | 4.25 |
| 0.4 | 1,506 | 476 | 3.82 | 1,610 | 551 | 4.30 |
| 0.5 | 1,448 | 481 | 3.87 | 1,545 | 557 | 4.36 |
| 0.6 | 1,400 | 493 | 3.95 | 1,512 | 566 | 4.41 |
| 0.7 | 1,341 | 502 | 4.00 | 1,433 | 578 | 4.59 |
| 0.8 | 1289 | 511 | 4.11 | 1,392 | 591 | 4.65 |

| *PG13480115M41A* - Rise Range: 45° - 75° | | | | | | | | | | | | |
|--|------------------|-------|-------|-------|------------------|-------|-------|-------|------------------|-------|-------|-------|
| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | 1.07 | NR | 1,105 | 186 | 1.56 | 77 | 1,397 | 323 | 2.57 | 61 |
| 0.3 | 822 | 134 | 1.14 | NR | 1,024 | 193 | 1.60 | NR | 1,346 | 331 | 2.67 | 63 |
| 0.4 | 733 | 140 | 1.20 | NR | 967 | 202 | 1.65 | NR | 1,288 | 342 | 2.76 | 66 |
| 0.5 | 664 | 150 | 1.26 | NR | 884 | 214 | 1.76 | NR | 1,273 | 352 | 2.82 | 67 |
| 0.6 | 606 | 154 | 1.28 | NR | 816 | 220 | 1.75 | NR | 1,178 | 359 | 2.88 | 72 |
| 0.7 | 584 | 162 | 1.32 | NR | 769 | 230 | 1.85 | NR | 1,120 | 369 | 2.97 | NR |
| 0.8 | 551 | 164 | 1.34 | NR | 698 | 236 | 1.89 | NR | 1,057 | 381 | 3.09 | NR |

| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|-------|------------------|-------|-------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 3.55 | 1,669 | 532 | 4.22 |
| 0.3 | 1,545 | 463 | 3.69 | 1,654 | 239 | 4.25 |
| 0.4 | 1,506 | 476 | 3.82 | 1,610 | 551 | 4.30 |
| 0.5 | 1,448 | 481 | 3.87 | 1,545 | 557 | 4.36 |
| 0.6 | 1,400 | 493 | 3.95 | 1,512 | 566 | 4.41 |
| 0.7 | 1,341 | 502 | 4.00 | 1,433 | 578 | 4.59 |
| 0.8 | 1289 | 511 | 4.11 | 1,392 | 591 | 4.65 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1360M41A***

***PG136090M41A* - Rise Range: 45° - 75°**

| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
|-------------|------------------|-------|------|------|------------------|-------|------|------|------------------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,125 | 162 | 1.44 | 61 | 1,466 | 315 | 2.67 | 47 | 1,780 | 496 | 3.33 | NR |
| 0.2 | 1,049 | 168 | 1.53 | 65 | 1,384 | 322 | 2.74 | 50 | 1,730 | 506 | 3.89 | NR |
| 0.3 | 1,000 | 178 | 1.60 | 69 | 1,347 | 329 | 2.78 | 51 | 1,664 | 520 | 4.01 | NR |
| 0.4 | 910 | 184 | 1.64 | 75 | 1,291 | 341 | 2.83 | 53 | 1,608 | 526 | 4.03 | NR |
| 0.5 | 857 | 197 | 1.75 | NR | 1,237 | 350 | 2.90 | 55 | 1,568 | 532 | 4.12 | NR |
| 0.6 | 809 | 201 | 1.83 | NR | 1,185 | 362 | 3.05 | 58 | 1,515 | 546 | 4.14 | 45 |
| 0.7 | 739 | 207 | 1.86 | NR | 1,134 | 369 | 3.09 | 60 | 1,477 | 552 | 4.18 | 46 |
| 0.8 | 703 | 218 | 1.96 | NR | 1,087 | 382 | 3.21 | 63 | 1,422 | 562 | 4.23 | 48 |

| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|------|------------------|-------|------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | 1,942 | 649 | 4.83 | 2,067 | 792 | 5.81 |
| 0.2 | 1,883 | 657 | 4.87 | 2,030 | 811 | 5.85 |
| 0.3 | 1,859 | 670 | 4.96 | 1,982 | 814 | 5.88 |
| 0.4 | 1,827 | 675 | 4.97 | 1,909 | 808 | 5.86 |
| 0.5 | 1,749 | 683 | 4.99 | 1,842 | 798 | 5.85 |
| 0.6 | 1,706 | 693 | 5.10 | 1,789 | 772 | 5.65 |
| 0.7 | 1,655 | 703 | 5.12 | 1,703 | 763 | 5.58 |
| 0.8 | 1,588 | 705 | 5.11 | 1,618 | 732 | 5.29 |

***PG1360115M41A* - Rise Range: 45° - 75°**

| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
|-------------|------------------|-------|------|------|------------------|-------|------|------|------------------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,125 | 162 | 1.44 | NR | 1,466 | 315 | 2.67 | 58 | 1,780 | 496 | 3.33 | 48 |
| 0.2 | 1,049 | 168 | 1.53 | NR | 1,384 | 322 | 2.74 | 62 | 1,730 | 506 | 3.89 | 49 |
| 0.3 | 1,000 | 178 | 1.60 | NR | 1,347 | 329 | 2.78 | 63 | 1,664 | 520 | 4.01 | 51 |
| 0.4 | 910 | 184 | 1.64 | NR | 1,291 | 341 | 2.83 | 66 | 1,608 | 526 | 4.03 | 53 |
| 0.5 | 857 | 197 | 1.75 | NR | 1,237 | 350 | 2.90 | 69 | 1,568 | 532 | 4.12 | 54 |
| 0.6 | 809 | 201 | 1.83 | NR | 1,185 | 362 | 3.05 | 72 | 1,515 | 546 | 4.14 | 56 |
| 0.7 | 739 | 207 | 1.86 | NR | 1,134 | 369 | 3.09 | NR | 1,477 | 552 | 4.18 | 58 |
| 0.8 | 703 | 218 | 1.96 | NR | 1,087 | 382 | 3.21 | NR | 1,422 | 562 | 4.23 | 60 |

| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|------|------------------|-------|------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | 1,942 | 649 | 4.83 | 2,067 | 792 | 5.81 |
| 0.2 | 1,883 | 657 | 4.87 | 2,030 | 811 | 5.85 |
| 0.3 | 1,859 | 670 | 4.96 | 1,982 | 814 | 5.88 |
| 0.4 | 1,827 | 675 | 4.97 | 1,909 | 808 | 5.86 |
| 0.5 | 1,749 | 683 | 4.99 | 1,842 | 798 | 5.85 |
| 0.6 | 1,706 | 693 | 5.10 | 1,789 | 772 | 5.65 |
| 0.7 | 1,655 | 703 | 5.12 | 1,703 | 763 | 5.58 |
| 0.8 | 1,588 | 705 | 5.11 | 1,618 | 732 | 5.29 |

***PG1360140M41A* - Rise Range: 45° - 75°**

| Unit Static | T1 HEATING SPEED | | | | T2 HEATING SPEED | | | | T3 HEATING SPEED | | | |
|-------------|------------------|-------|------|------|------------------|-------|------|------|------------------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,125 | 162 | 1.44 | NR | 1,466 | 315 | 2.67 | 71 | 1,780 | 496 | 3.33 | 59 |
| 0.2 | 1,049 | 168 | 1.53 | NR | 1,384 | 322 | 2.74 | NR | 1,730 | 506 | 3.89 | 60 |
| 0.3 | 1,000 | 178 | 1.60 | NR | 1,347 | 329 | 2.78 | NR | 1,664 | 520 | 4.01 | 63 |
| 0.4 | 910 | 184 | 1.64 | NR | 1,291 | 341 | 2.83 | NR | 1,608 | 526 | 4.03 | 65 |
| 0.5 | 857 | 197 | 1.75 | NR | 1,237 | 350 | 2.90 | NR | 1,568 | 532 | 4.12 | 67 |
| 0.6 | 809 | 201 | 1.83 | NR | 1,185 | 362 | 3.05 | NR | 1,515 | 546 | 4.14 | 69 |
| 0.7 | 739 | 207 | 1.86 | NR | 1,134 | 369 | 3.09 | NR | 1,477 | 552 | 4.18 | 71 |
| 0.8 | 703 | 218 | 1.96 | NR | 1,087 | 382 | 3.21 | NR | 1,422 | 562 | 4.23 | 74 |


| Unit Static | T4 COOLING SPEED | | | T5 COOLING SPEED | | |
|-------------|------------------|-------|------|------------------|-------|------|
| | CFM | WATTS | AMPS | CFM | WATTS | AMPS |
| 0.1 | 1,942 | 649 | 4.83 | 2,067 | 792 | 5.81 |
| 0.2 | 1,883 | 657 | 4.87 | 2,030 | 811 | 5.85 |
| 0.3 | 1,859 | 670 | 4.96 | 1,982 | 814 | 5.88 |
| 0.4 | 1,827 | 675 | 4.97 | 1,909 | 808 | 5.86 |
| 0.5 | 1,749 | 683 | 4.99 | 1,842 | 798 | 5.85 |
| 0.6 | 1,706 | 693 | 5.10 | 1,789 | 772 | 5.65 |
| 0.7 | 1,655 | 703 | 5.12 | 1,703 | 763 | 5.58 |
| 0.8 | 1,588 | 705 | 5.11 | 1,618 | 732 | 5.29 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

BTU OUTPUT vs TEMPERATURE RISE CHART



MODEL: APG1324***M41A/D*
GPG1324***M41A*

Design: Subcooling, 7 °F @ the liquid access fitting connection. AHRI95 test conditions. Design Superheat 14 °F @ the compressor suction access fitting connection.

EXPANDED PERFORMANCE DATA

COOLING OPERATION

| IDB* Airflow | 65 | | | | | | | | | | 75 | | | | | | | | | | 85 | | | | | | | | | | 95 | | | | | | | | | | 105 | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|--|----|--|----|--|----|--|----|--|----|--|----|--|----|--|----|--|----|--|----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|------|--|
| | 59 | | 63 | | 67 | | 71 | | 75 | | 79 | | 83 | | 87 | | 91 | | 95 | | 99 | | 103 | | 107 | | 111 | | 115 | | 119 | | 123 | | 127 | | 131 | | 135 | | 139 | | 143 | | 147 | | 151 | | 155 | | 159 | | 163 | | 167 | | 171 | | 175 | | 179 | | 183 | | 187 | | 191 | | 195 | | 199 | | 203 | | 207 | | 211 | | 215 | | 219 | | 223 | | 227 | | 231 | | 235 | | 239 | | 243 | | 247 | | 251 | | 255 | | 259 | | 263 | | 267 | | 271 | | 275 | | 279 | | 283 | | 287 | | 291 | | 295 | | 299 | | 303 | | 307 | | 311 | | 315 | | 319 | | 323 | | 327 | | 331 | | 335 | | 339 | | 343 | | 347 | | 351 | | 355 | | 359 | | 363 | | 367 | | 371 | | 375 | | 379 | | 383 | | 387 | | 391 | | 395 | | 399 | | 403 | | 407 | | 411 | | 415 | | 419 | | 423 | | 427 | | 431 | | 435 | | 439 | | 443 | | 447 | | 451 | | 455 | | 459 | | 463 | | 467 | | 471 | | 475 | | 479 | | 483 | | 487 | | 491 | | 495 | | 499 | | 503 | | 507 | | 511 | | 515 | | 519 | | 523 | | 527 | | 531 | | 535 | | 539 | | 543 | | 547 | | 551 | | 555 | | 559 | | 563 | | 567 | | 571 | | 575 | | 579 | | 583 | | 587 | | 591 | | 595 | | 599 | | 603 | | 607 | | 611 | | 615 | | 619 | | 623 | | 627 | | 631 | | 635 | | 639 | | 643 | | 647 | | 651 | | 655 | | 659 | | 663 | | 667 | | 671 | | 675 | | 679 | | 683 | | 687 | | 691 | | 695 | | 699 | | 703 | | 707 | | 711 | | 715 | | 719 | | 723 | | 727 | | 731 | | 735 | | 739 | | 743 | | 747 | | 751 | | 755 | | 759 | | 763 | | 767 | | 771 | | 775 | | 779 | | 783 | | 787 | | 791 | | 795 | | 799 | | 803 | | 807 | | 811 | | 815 | | 819 | | 823 | | 827 | | 831 | | 835 | | 839 | | 843 | | 847 | | 851 | | 855 | | 859 | | 863 | | 867 | | 871 | | 875 | | 879 | | 883 | | 887 | | 891 | | 895 | | 899 | | 903 | | 907 | | 911 | | 915 | | 919 | | 923 | | 927 | | 931 | | 935 | | 939 | | 943 | | 947 | | 951 | | 955 | | 959 | | 963 | | 967 | | 971 | | 975 | | 979 | | 983 | | 987 | | 991 | | 995 | | 999 | | 1003 | | 1007 | | 1011 | | 1015 | | 1019 | | 1023 | | 1027 | | 1031 | | 1035 | | 1039 | | 1043 | | 1047 | | 1051 | | 1055 | | 1059 | | 1063 | | 1067 | | 1071 | | 1075 | | 1079 | | 1083 | | 1087 | | 1091 | | 1095 | | 1099 | | 1103 | | 1107 | | 1111 | | 1115 | | 1119 | | 1123 | | 1127 | | 1131 | | 1135 | | 1139 | | 1143 | | 1147 | | 1151 | | 1155 | | 1159 | | 1163 | | 1167 | | 1171 | | 1175 | | 1179 | | 1183 | | 1187 | | 1191 | | 1195 | | 1199 | | 1203 | | 1207 | | 1211 | | 1215 | | 1219 | | 1223 | | 1227 | | 1231 | | 1235 | | 1239 | | 1243 | | 1247 | | 1251 | | 1255 | | 1259 | | 1263 | | 1267 | | 1271 | | 1275 | | 1279 | | 1283 | | 1287 | | 1291 | | 1295 | | 1299 | | 1303 | | 1307 | | 1311 | | 1315 | | 1319 | | 1323 | | 1327 | | 1331 | | 1335 | | 1339 | | 1343 | | 1347 | | 1351 | | 1355 | | 1359 | | 1363 | | 1367 | | 1371 | | 1375 | | 1379 | | 1383 | | 1387 | | 1391 | | 1395 | | 1399 | | 1403 | | 1407 | | 1411 | | 1415 | | 1419 | | 1423 | | 1427 | | 1431 | | 1435 | | 1439 | | 1443 | | 1447 | | 1451 | | 1455 | | 1459 | | 1463 | | 1467 | | 1471 | | 1475 | | 1479 | | 1483 | | 1487 | | 1491 | | 1495 | | 1499 | | 1503 | | 1507 | | 1511 | | 1515 | | 1519 | | 1523 | | 1527 | | 1531 | | 1535 | | 1539 | | 1543 | | 1547 | | 1551 | | 1555 | | 1559 | | 1563 | | 1567 | | 1571 | | 1575 | | 1579 | | 1583 | | 1587 | | 1591 | | 1595 | | 1599 | | 1603 | | 1607 | | 1611 | | 1615 | | 1619 | | 1623 | | 1627 | | 1631 | | 1635 | | 1639 | | 1643 | | 1647 | | 1651 | | 1655 | | 1659 | | 1663 | | 1667 | | 1671 | | 1675 | | 1679 | | 1683 | | 1687 | | 1691 | | 1695 | | 1699 | | 1703 | | 1707 | | 1711 | | 1715 | | 1719 | | 1723 | | 1727 | | 1731 | | 1735 | | 1739 | | 1743 | | 1747 | | 1751 | | 1755 | | 1759 | | 1763 | | 1767 | | 1771 | | 1775 | | 1779 | | 1783 | | 1787 | | 1791 | | 1795 | | 1799 | | 1803 | | 1807 | | 1811 | | 1815 | | 1819 | | 1823 | | 1827 | | 1831 | | 1835 | | 1839 | | 1843 | | 1847 | | 1851 | | 1855 | | 1859 | | 1863 | | 1867 | | 1871 | | 1875 | | 1879 | | 1883 | | 1887 | | 1891 | | 1895 | | 1899 | | 1903 | | 1907 | | 1911 | | 1915 | | 1919 | | 1923 | | 1927 | | 1931 | | 1935 | | 1939 | | 1943 | | 1947 | | 1951 | | 1955 | | 1959 | | 1963 | | 1967 | | 1971 | | 1975 | | 1979 | | 1983 | | 1987 | | 1991 | | 1995 | | 1999 | | 2003 | | 2007 | | 2011 | | 2015 | | 2019 | | 2023 | | 2027 | | 2031 | | 2035 | | 2039 | | 2043 | | 2047 | | 2051 | | 2055 | | 2059 | | 2063 | | 2067 | | 2071 | | 2075 | | 2079 | | 2083 | | 2087 | | 2091 | | 2095 | | 2099 | | 2103 | | 2107 | | 2111 | | 2115 | | 2119 | | 2123 | | 2127 | | 2131 | | 2135 | | 2139 | | 2143 | | 2147 | | 2151 | | 2155 | | 2159 | | 2163 | | 2167 | | 2171 | | 2175 | | 2179 | | 2183 | | 2187 | | 2191 | | 2195 | | 2199 | | 2203 | | 2207 | | 2211 | | 2215 | | 2219 | | 2223 | | 2227 | | 2231 | | 2235 | | 2239 | | 2243 | | 2247 | | 2251 | | 2255 | | 2259 | | 2263 | | 2267 | | 2271 | | 2275 | | 2279 | | 2283 | | 2287 | | 2291 | | 2295 | | 2299 | | 2303 | | 2307 | | 2311 | | 2315 | | 2319 | | 2323 | | 2327 | | 2331 | | 2335 | | 2339 | | 2343 | | 2347 | | 2351 | | 2355 | | 2359 | | 2363 | | 2367 | | 2371 | | 2375 | | 2379 | | 2383 | | 2387 | | 2391 | | 2395 | | 2399 | | 2403 | | 2407 | | 2411 | | 2415 | | 2419 | | 2423 | | 2427 | | 2431 | | 2435 | | 2439 | | 2443 | | 2447 | | 2451 | | 2455 | | 2459 | | 2463 | | 2467 | | 2471 | | 2475 | | 2479 | | 2483 | | 2487 | | 2491 | | 2495 | | 2499 | | 2503 | | 2507 | | 2511 | | 2515 | | 2519 | | 2523 | | 2527 | | 2531 | | 2535 | | 2539 | | 2543 | | 2547 | | 2551 | | 2555 | | 2559 | | 2563 | | 2567 | | 2571 | | 2575 | | 2579 | | 2583 | | 2587 | | 2591 | | 2595 | | 2599 | | 2603 | | 2607 | | 2611 | | 2615 | | 2619 | | 2623 | | 2627 | | 2631 | | 2635 | | 2639 | | 2643 | | 2647 | | 2651 | | 2655 | | 2659 | | 2663 | | 2667 | | 2671 | | 2675 | | 2679 | | 2683 | | 2687 | | 2691 | | 2695 | | 2699 | | 2703 | | 2707 | | 2711 | | 2715 | | 2719 | | 2723 | | 2727 | | 2731 | | 2735 | | 2739 | | 2743 | | 2747 | | 2751 | | 2755 | | 2759 | | 2763 | | 2767 | | 2771 | | 2775 | | 2779 | | 2783 | | 2787 | | 2791 | | 2795 | | 2799 | | 2803 | | 2807 | | 2811 | | 2815 | | 2819 | | 2823 | | 2827 | | 2831 | | 2835 | | 2839 | | 2843 | | 2847 | | 2851 | | 2855 | | 2859 | | 2863 | | 2867 | | 2871 | | 2875 | | 2879 | | 2883 | | 2887 | | 2891 | | 2895 | | 2899 | | 2903 | | 2907 | | 2911 | | 2915 | | 2919 | | 2923 | | 2927 | | 2931 | | 2935 | | 2939 | | 2943 | | 2947 | | 2951 | | 2955 | | 2959 | | 2963 | | 2967 | | 2971 | | 2975 | | 2979 | | 2983 | | 2987 | | 2991 | | 2995 | | 2999 | | 3003 | | 3007 | | 3011 | | 3015 | | 3019 | | 3023 | | 3027 | | 3031 | | 3035 | | 3039 | | 3043 | | 3047 | | 3051 | | 3055 | | 3059 | | 3063 | | 3067 | | 3071 | | 3075 | | 3079 | | 3083 | | 3087 | | 3091 | | 3095 | | 3099 | | 3103 | | 3107 | | 3111 | | 3115 | | 3119 | | 3123 | | 3127 | | 3131 | | 3135 | | 3139 | | 3143 | | 3147 | | 3151 | | 3155 | | 3159 | | 3163 | | 3167 | | 3171 | | 3175 | | 3179 | | 3183 | | 3187 | | 3191 | | 3195 | | 3199 | | 3203 | | 3207 | | 3211 | | 3215 | | 3219 | | 3223 | | 3227 | | 3231 | | 3235 | | 3239 | | 3243 | | 3247 | | 3251 | | 3255 | | 3259 | | 3263 | | 3267 | | 3271 | | 3275 | | 3279 | | 3283 | | 3287 | | 3291 | | 3295 | | 3299 | | 3303 | | 3307 | | 3311 | | 3315 | | 3319 | | 3323 | | 3327 | | 3331 | | 3335 | | 3339 | | 3343 | | 3347 | | 3351 | | 3355 | | 3359 | | 3363 | | 3367 | | 3371 | | 3375 | | 3379 | | 3383 | | 3387 | | 3391 | | 3395 | | 3399 | | 3403 | | 3407 | | 3411 | | 3415 | | 3419 | | 3423 | | 3427 | | 3431 | | 3435 | | 3439 | | 3443 | | 3447 | | 3451 | | 3455 | | 3459 | | 3463 | | 3467 | | 3471 | | 3475 | | 3479 | | 3483 | | 3487 | | 3491 | | 3495 | | 3499 | | 3503 | | 3507 | | 3511 | | 3515 | | 3519 | | 3523 | | 3527 | | 3531 | | 3535 | | 3539 | | 3543 | | 3547 | | 3551 | | 3555 | | 3559 | | 3563 | | 3567 | | 3571 | | 3575 | | 3579 | | 3583 | | 3587 | | 3591 | | 3595 | | 3599 | | 3603 | | 3607 | | 3611 | | 3615 | | 3619 | | 3623 | | 3627 | | 3631 | | 3635 | | 3639 | | 3643 | | 3647 | | 3651 | | 3655 | | 3659 | | 3663 | | 3667 | | 3671 | | 3675 | | 3679 | | 3683 | | 3687 | | 3691 | | 3695 | | 3699 | | 3703 | | 3707 | | 3711 | | 3715 | | 3719 | | 3723 | | 3727 | | 3731 | | 3735 | | 3739 | | 3743 | | 3747 | | 3751 | | 3755 | | 3759 | | 3763 | | 3767 | | 3771 | | 3775 | | 3779 | | 3783 | | 3787 | | 3791 | | 3795 | | 3799 | | 3803 | | 3807 | | 3811 | | 3815 | | 3819 | | 3823 | | 3827 | | 3831 | | 3835 | | 3839 | | 3843 | | 3847 | | 3851 | | 3855 | | 3859 | | 3863 | | 3867 | | 3871 | | 3875 | | 3879 | | 3883 | | 3887 | | 3891 | | 3895 | | 3899 | | 3903 | | 3907 | | 3911 | | 3915 | | 3919 | | 3923 | | 3927 | | 3931 | | 3935 | | 3939 | | 3943 | | 3947 | | 3951 | | 3955 | | 3959 | | 3963 | | 3967 | | 3971 | | 3975 | | 3979 | | 3983 | | 3987 | | 3991 | | 3995 | | 3999 | | 4003 | | 4007 | | 4011 | | 4015 | | 4019 | | 4023 | | 4027 | | 4031 | | 4035 | | 4039 | | 4043 | | 4047 | | 4051 | | 4055 | | 4059 | | 4063 | | 4067 | | 4071 | | 4075 | | 4079 | | 4083 | | 4087 | | 4091 | | 4095 | | 4099 | | 4103 | | 4107 | | 4111 | | 4115 | | 4119 | | 4123 | | 4127 | | 4131 | |

COOLING PERFORMANCE DATA

APG1324***M41(A/D)*
GPG1324***M41A*

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: APG1324***M41(A/D)*
GPG1324***M41A*

Design Subcooling, 7°F @ the liquid access fitting connection AHR195 test conditions. Design Superheat 14°F @ the compressor suction access fitting connection.

| | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|--|--|--|--|
| | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | MBh | 24.3 | 24.9 | 26.6 | 28.4 | 23.8 | 24.3 | 26.0 | 27.7 | 23.2 | 23.7 | 25.3 | 27.1 | 22.6 | 23.1 | 24.7 | 26.4 | 21.5 | 22.0 | 23.5 | 25.1 | 19.9 | 20.4 | 21.8 | 23.3 | | | | | |
| | S/T | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.59 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.85 | 0.64 | 1.00 | 1.00 | 0.86 | 0.64 | | | | | |
| | Delta T | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 24 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 23 | 21 | 17 | 21 | 21 | 19 | 15 | | | | | |
| | KW | 1.72 | 1.75 | 1.81 | 1.86 | 1.85 | 1.89 | 1.94 | 2.01 | 1.96 | 2.00 | 2.06 | 2.13 | 2.06 | 2.10 | 2.17 | 2.24 | 2.14 | 2.19 | 2.26 | 2.34 | 2.22 | 2.27 | 2.34 | 2.42 | | | | | |
| | AMPS | 6.8 | 6.9 | 7.1 | 7.4 | 7.3 | 7.4 | 7.6 | 7.9 | 7.8 | 8.0 | 8.3 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 8.8 | 9.0 | 9.3 | 9.6 | 9.3 | 9.5 | 9.8 | 10.2 | | | | | |
| | HI PR | 248 | 267 | 282 | 294 | 278 | 300 | 316 | 330 | 317 | 341 | 360 | 375 | 361 | 388 | 410 | 427 | 406 | 437 | 461 | 481 | 448 | 448 | 482 | 509 | 531 | | | | |
| | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 153 | 163 | 138 | 147 | 161 | 171 | 143 | 152 | 166 | 177 | | | | | |
| | MBh | 23.6 | 24.1 | 25.8 | 27.6 | 23.1 | 23.6 | 25.2 | 26.9 | 22.5 | 23.0 | 24.6 | 26.3 | 22.0 | 22.5 | 24.0 | 25.7 | 20.9 | 21.3 | 22.8 | 24.4 | 19.3 | 19.8 | 21.1 | 22.6 | | | | | |
| | S/T | 0.94 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.82 | 0.61 | | | | | |
| | Delta T | 26 | 25 | 21 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 24 | 25 | 22 | 17 | 23 | 23 | 20 | 16 | | | | | |
| KW | 1.71 | 1.74 | 1.79 | 1.85 | 1.83 | 1.87 | 1.93 | 1.99 | 1.94 | 1.99 | 2.05 | 2.11 | 2.04 | 2.09 | 2.15 | 2.22 | 2.13 | 2.17 | 2.24 | 2.32 | 2.20 | 2.25 | 2.32 | 2.40 | | | | | | |
| AMPS | 6.7 | 6.9 | 7.1 | 7.3 | 7.2 | 7.4 | 7.6 | 7.8 | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.4 | 8.7 | 9.0 | 8.7 | 8.9 | 9.2 | 9.6 | 9.2 | 9.4 | 9.7 | 10.1 | | | | | | |
| HI PR | 246 | 264 | 279 | 291 | 276 | 297 | 313 | 327 | 313 | 337 | 356 | 372 | 357 | 384 | 406 | 423 | 402 | 432 | 456 | 476 | 444 | 444 | 478 | 504 | 526 | | | | | |
| LO PR | 113 | 121 | 132 | 140 | 120 | 127 | 139 | 148 | 125 | 132 | 145 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 170 | 142 | 151 | 165 | 175 | | | | | | |
| MBh | 21.8 | 22.3 | 23.8 | 25.5 | 21.3 | 21.8 | 23.3 | 24.9 | 20.8 | 21.3 | 22.7 | 24.3 | 20.3 | 20.7 | 22.2 | 23.7 | 19.3 | 19.7 | 21.0 | 22.5 | 17.9 | 18.2 | 19.5 | 20.8 | | | | | | |
| S/T | 0.90 | 0.85 | 0.69 | 0.51 | 0.93 | 0.88 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.93 | 0.76 | 0.56 | 1.03 | 0.96 | 0.78 | 0.59 | 1.04 | 0.97 | 0.79 | 0.59 | | | | | | |
| Delta T | 26 | 25 | 22 | 17 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 26 | 25 | 22 | 18 | 25 | 24 | 21 | 16 | | | | | | |
| KW | 1.67 | 1.70 | 1.75 | 1.81 | 1.79 | 1.83 | 1.88 | 1.94 | 1.90 | 1.94 | 2.00 | 2.06 | 1.99 | 2.04 | 2.10 | 2.17 | 2.08 | 2.12 | 2.19 | 2.26 | 2.15 | 2.19 | 2.26 | 2.34 | | | | | | |
| AMPS | 6.5 | 6.7 | 6.9 | 7.1 | 7.0 | 7.2 | 7.4 | 7.6 | 7.6 | 7.7 | 8.0 | 8.3 | 8.0 | 8.2 | 8.5 | 8.8 | 8.5 | 8.7 | 9.0 | 9.3 | 9.0 | 9.2 | 9.5 | 9.8 | | | | | | |
| HI PR | 238 | 256 | 271 | 282 | 267 | 288 | 304 | 317 | 304 | 327 | 346 | 360 | 346 | 373 | 394 | 410 | 390 | 419 | 443 | 462 | 430 | 463 | 489 | 510 | | | | | | |
| LO PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 128 | 140 | 149 | 127 | 135 | 147 | 157 | 133 | 141 | 154 | 164 | 138 | 146 | 160 | 170 | | | | | | |
| 85 | MBh | 24.8 | 25.2 | 26.4 | 28.2 | 24.2 | 24.7 | 25.8 | 27.6 | 23.6 | 24.1 | 25.2 | 26.9 | 23.0 | 23.5 | 24.6 | 26.2 | 21.9 | 22.3 | 23.4 | 24.9 | 20.3 | 20.7 | 21.6 | 23.1 | | | | | |
| | S/T | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 0.86 | 0.83 | | | | | | |
| | Delta T | 26 | 26 | 24 | 21 | 25 | 25 | 25 | 21 | 24 | 25 | 25 | 21 | 24 | 24 | 25 | 22 | 23 | 23 | 24 | 21 | 21 | 21 | 22 | 20 | | | | | |
| | KW | 1.73 | 1.77 | 1.82 | 1.88 | 1.86 | 1.90 | 1.96 | 2.02 | 1.98 | 2.02 | 2.08 | 2.15 | 2.08 | 2.12 | 2.19 | 2.26 | 2.16 | 2.21 | 2.28 | 2.36 | 2.24 | 2.29 | 2.36 | 2.44 | | | | | |
| | AMPS | 6.8 | 7.0 | 7.2 | 7.4 | 7.3 | 7.5 | 7.7 | 8.0 | 7.9 | 8.1 | 8.3 | 8.6 | 8.4 | 8.6 | 8.9 | 9.2 | 8.9 | 9.1 | 9.4 | 9.7 | 9.4 | 9.6 | 9.9 | 10.3 | | | | | |
| | HI PR | 251 | 270 | 285 | 297 | 281 | 303 | 319 | 333 | 320 | 344 | 363 | 379 | 364 | 392 | 414 | 432 | 410 | 441 | 466 | 486 | 453 | 487 | 514 | 537 | | | | | |
| | LO PR | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 145 | 154 | 168 | 179 | | | | | |
| | MBh | 24.0 | 24.5 | 25.7 | 27.4 | 23.5 | 23.9 | 25.1 | 26.8 | 22.9 | 23.4 | 24.5 | 26.1 | 22.4 | 22.8 | 23.9 | 25.5 | 21.2 | 21.7 | 22.7 | 24.2 | 19.7 | 20.1 | 21.0 | 22.4 | | | | | |
| | S/T | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.80 | | | | | |
| | Delta T | 27 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 26 | 27 | 26 | 23 | 25 | 25 | 26 | 22 | 23 | 23 | 24 | 21 | | | | | |
| KW | 1.72 | 1.75 | 1.81 | 1.86 | 1.85 | 1.89 | 1.94 | 2.01 | 1.96 | 2.00 | 2.06 | 2.13 | 2.06 | 2.10 | 2.17 | 2.24 | 2.14 | 2.19 | 2.26 | 2.34 | 2.22 | 2.27 | 2.34 | 2.42 | | | | | | |
| AMPS | 6.8 | 6.9 | 7.1 | 7.4 | 7.3 | 7.4 | 7.6 | 7.9 | 7.8 | 8.0 | 8.3 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 8.8 | 9.0 | 9.3 | 9.6 | 9.3 | 9.5 | 9.8 | 10.2 | | | | | | |
| HI PR | 248 | 267 | 282 | 294 | 278 | 300 | 316 | 330 | 317 | 341 | 360 | 375 | 361 | 388 | 410 | 427 | 406 | 437 | 461 | 481 | 448 | 448 | 482 | 509 | 531 | | | | | |
| LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 153 | 163 | 138 | 147 | 161 | 171 | 143 | 152 | 166 | 177 | | | | | | |
| MBh | 22.2 | 22.6 | 23.7 | 25.3 | 21.7 | 22.1 | 23.1 | 24.7 | 21.2 | 21.6 | 22.6 | 24.1 | 20.6 | 21.0 | 22.0 | 23.5 | 19.6 | 20.0 | 20.9 | 22.3 | 18.2 | 18.5 | 19.4 | 20.7 | | | | | | |
| S/T | 0.95 | 0.91 | 0.82 | 0.67 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.95 | 0.77 | | | | | | |
| Delta T | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 27 | 23 | 26 | 27 | 26 | 23 | 24 | 25 | 24 | 21 | | | | | | |
| KW | 1.68 | 1.71 | 1.77 | 1.82 | 1.80 | 1.84 | 1.90 | 1.96 | 1.91 | 1.95 | 2.01 | 2.08 | 2.01 | 2.05 | 2.12 | 2.19 | 2.09 | 2.14 | 2.21 | 2.28 | 2.16 | 2.21 | 2.28 | 2.36 | | | | | | |
| AMPS | 6.6 | 6.7 | 6.9 | 7.2 | 7.1 | 7.2 | 7.5 | 7.7 | 7.6 | 7.8 | 8.0 | 8.3 | 8.1 | 8.3 | 8.6 | 8.9 | 8.6 | 8.8 | 9.1 | 9.4 | 9.1 | 9.3 | 9.6 | 9.9 | | | | | | |
| HI PR | 241 | 259 | 273 | 285 | 270 | 291 | 307 | 320 | 307 | 330 | 349 | 364 | 350 | 376 | 397 | 415 | 393 | 423 | 447 | 466 | 435 | 468 | 494 | 515 | | | | | | |
| LO PR | 111 | 118 | 129 | 137 | 117 | 125 | 136 | 145 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 158 | 134 | 143 | 156 | 166 | 139 | 148 | 161 | 172 | | | | | | |

* NOTE: Shaded area reflects AHR1 rating conditions IDB: Entering Indoor Dry Bulb Temperature KW = Total system power High and low pressures are measured at the liquid and suction access fittings. AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

EXPANDED PERFORMANCE DATA

COOLING OPERATION

COOLING PERFORMANCE DATA

*PG1330***M41A*

Design Subcooling, 7 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 5°F @ the compressor suction access fitting connection.

| IDB* Airflow | 65 | | | | | | | | | | | | 75 | | | | | | | | | | | | 85 | | | | | | | | | | | | 95 | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|--------------------------------------|----|----|----|----|----|----|----|----|----|----|-----|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor-Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 59 | 63 | 67 | 71 | 75 | 79 | 83 | 87 | 91 | 95 | 99 | 103 | 107 | 111 | 115 | 119 | 123 | 127 | 131 | 135 | 139 | 143 | 147 | 151 | 155 | 159 | 163 | 167 | 171 | 175 | 179 | 183 | 187 | 191 | 195 | 199 | 203 | 207 | 211 | 215 | 219 | 223 | 227 | 231 | 235 | 239 | 243 | 247 | 251 | 255 | 259 | 263 | 267 | 271 | 275 | 279 | 283 | 287 | 291 | 295 | 299 | 303 | 307 | 311 | 315 | 319 | 323 | 327 | 331 | 335 | 339 | 343 | 347 | 351 | 355 | 359 | 363 | 367 | 371 | 375 | 379 | 383 | 387 | 391 | 395 | 399 | 403 | 407 | 411 | 415 | 419 | 423 | 427 | 431 | 435 | 439 | 443 | 447 | 451 | 455 | 459 | 463 | 467 | 471 | 475 | 479 | 483 | 487 | 491 | 495 | 499 | 503 | 507 | 511 | 515 | 519 | 523 | 527 | 531 | 535 | 539 | 543 | 547 | 551 | 555 | 559 | 563 | 567 | 571 | 575 | 579 | 583 | 587 | 591 | 595 | 599 | 603 | 607 | 611 | 615 | 619 | 623 | 627 | 631 | 635 | 639 | 643 | 647 | 651 | 655 | 659 | 663 | 667 | 671 | 675 | 679 | 683 | 687 | 691 | 695 | 699 | 703 | 707 | 711 | 715 | 719 | 723 | 727 | 731 | 735 | 739 | 743 | 747 | 751 | 755 | 759 | 763 | 767 | 771 | 775 | 779 | 783 | 787 | 791 | 795 | 799 | 803 | 807 | 811 | 815 | 819 | 823 | 827 | 831 | 835 | 839 | 843 | 847 | 851 | 855 | 859 | 863 | 867 | 871 | 875 | 879 | 883 | 887 | 891 | 895 | 899 | 903 | 907 | 911 | 915 | 919 | 923 | 927 | 931 | 935 | 939 | 943 | 947 | 951 | 955 | 959 | 963 | 967 | 971 | 975 | 979 | 983 | 987 | 991 | 995 | 999 | 1003 | 1007 | 1011 | 1015 | 1019 | 1023 | 1027 | 1031 | 1035 | 1039 | 1043 | 1047 | 1051 | 1055 | 1059 | 1063 | 1067 | 1071 | 1075 | 1079 | 1083 | 1087 | 1091 | 1095 | 1099 | 1103 | 1107 | 1111 | 1115 | 1119 | 1123 | 1127 | 1131 | 1135 | 1139 | 1143 | 1147 | 1151 | 1155 | 1159 | 1163 | 1167 | 1171 | 1175 | 1179 | 1183 | 1187 | 1191 | 1195 | 1199 | 1203 | 1207 | 1211 | 1215 | 1219 | 1223 | 1227 | 1231 | 1235 | 1239 | 1243 | 1247 | 1251 | 1255 | 1259 | 1263 | 1267 | 1271 | 1275 | 1279 | 1283 | 1287 | 1291 | 1295 | 1299 | 1303 | 1307 | 1311 | 1315 | 1319 | 1323 | 1327 | 1331 | 1335 | 1339 | 1343 | 1347 | 1351 | 1355 | 1359 | 1363 | 1367 | 1371 | 1375 | 1379 | 1383 | 1387 | 1391 | 1395 | 1399 | 1403 | 1407 | 1411 | 1415 | 1419 | 1423 | 1427 | 1431 | 1435 | 1439 | 1443 | 1447 | 1451 | 1455 | 1459 | 1463 | 1467 | 1471 | 1475 | 1479 | 1483 | 1487 | 1491 | 1495 | 1499 | 1503 | 1507 | 1511 | 1515 | 1519 | 1523 | 1527 | 1531 | 1535 | 1539 | 1543 | 1547 | 1551 | 1555 | 1559 | 1563 | 1567 | 1571 | 1575 | 1579 | 1583 | 1587 | 1591 | 1595 | 1599 | 1603 | 1607 | 1611 | 1615 | 1619 | 1623 | 1627 | 1631 | 1635 | 1639 | 1643 | 1647 | 1651 | 1655 | 1659 | 1663 | 1667 | 1671 | 1675 | 1679 | 1683 | 1687 | 1691 | 1695 | 1699 | 1703 | 1707 | 1711 | 1715 | 1719 | 1723 | 1727 | 1731 | 1735 | 1739 | 1743 | 1747 | 1751 | 1755 | 1759 | 1763 | 1767 | 1771 | 1775 | 1779 | 1783 | 1787 | 1791 | 1795 | 1799 | 1803 | 1807 | 1811 | 1815 | 1819 | 1823 | 1827 | 1831 | 1835 | 1839 | 1843 | 1847 | 1851 | 1855 | 1859 | 1863 | 1867 | 1871 | 1875 | 1879 | 1883 | 1887 | 1891 | 1895 | 1899 | 1903 | 1907 | 1911 | 1915 | 1919 | 1923 | 1927 | 1931 | 1935 | 1939 | 1943 | 1947 | 1951 | 1955 | 1959 | 1963 | 1967 | 1971 | 1975 | 1979 | 1983 | 1987 | 1991 | 1995 | 1999 | 2003 | 2007 | 2011 | 2015 | 2019 | 2023 | 2027 | 2031 | 2035 | 2039 | 2043 | 2047 | 2051 | 2055 | 2059 | 2063 | 2067 | 2071 | 2075 | 2079 | 2083 | 2087 | 2091 | 2095 | 2099 | 2103 | 2107 | 2111 | 2115 | 2119 | 2123 | 2127 | 2131 | 2135 | 2139 | 2143 | 2147 | 2151 | 2155 | 2159 | 2163 | 2167 | 2171 | 2175 | 2179 | 2183 | 2187 | 2191 | 2195 | 2199 | 2203 | 2207 | 2211 | 2215 | 2219 | 2223 | 2227 | 2231 | 2235 | 2239 | 2243 | 2247 | 2251 | 2255 | 2259 | 2263 | 2267 | 2271 | 2275 | 2279 | 2283 | 2287 | 2291 | 2295 | 2299 | 2303 | 2307 | 2311 | 2315 | 2319 | 2323 | 2327 | 2331 | 2335 | 2339 | 2343 | 2347 | 2351 | 2355 | 2359 | 2363 | 2367 | 2371 | 2375 | 2379 | 2383 | 2387 | 2391 | 2395 | 2399 | 2403 | 2407 | 2411 | 2415 | 2419 | 2423 | 2427 | 2431 | 2435 | 2439 | 2443 | 2447 | 2451 | 2455 | 2459 | 2463 | 2467 | 2471 | 2475 | 2479 | 2483 | 2487 | 2491 | 2495 | 2499 | 2503 | 2507 | 2511 | 2515 | 2519 | 2523 | 2527 | 2531 | 2535 | 2539 | 2543 | 2547 | 2551 | 2555 | 2559 | 2563 | 2567 | 2571 | 2575 | 2579 | 2583 | 2587 | 2591 | 2595 | 2599 | 2603 | 2607 | 2611 | 2615 | 2619 | 2623 | 2627 | 2631 | 2635 | 2639 | 2643 | 2647 | 2651 | 2655 | 2659 | 2663 | 2667 | 2671 | 2675 | 2679 | 2683 | 2687 | 2691 | 2695 | 2699 | 2703 | 2707 | 2711 | 2715 | 2719 | 2723 | 2727 | 2731 | 2735 | 2739 | 2743 | 2747 | 2751 | 2755 | 2759 | 2763 | 2767 | 2771 | 2775 | 2779 | 2783 | 2787 | 2791 | 2795 | 2799 | 2803 | 2807 | 2811 | 2815 | 2819 | 2823 | 2827 | 2831 | 2835 | 2839 | 2843 | 2847 | 2851 | 2855 | 2859 | 2863 | 2867 | 2871 | 2875 | 2879 | 2883 | 2887 | 2891 | 2895 | 2899 | 2903 | 2907 | 2911 | 2915 | 2919 | 2923 | 2927 | 2931 | 2935 | 2939 | 2943 | 2947 | 2951 | 2955 | 2959 | 2963 | 2967 | 2971 | 2975 | 2979 | 2983 | 2987 | 2991 | 2995 | 2999 | 3003 | 3007 | 3011 | 3015 | 3019 | 3023 | 3027 | 3031 | 3035 | 3039 | 3043 | 3047 | 3051 | 3055 | 3059 | 3063 | 3067 | 3071 | 3075 | 3079 | 3083 | 3087 | 3091 | 3095 | 3099 | 3103 | 3107 | 3111 | 3115 | 3119 | 3123 | 3127 | 3131 | 3135 | 3139 | 3143 | 3147 | 3151 | 3155 | 3159 | 3163 | 3167 | 3171 | 3175 | 3179 | 3183 | 3187 | 3191 | 3195 | 3199 | 3203 | 3207 | 3211 | 3215 | 3219 | 3223 | 3227 | 3231 | 3235 | 3239 | 3243 | 3247 | 3251 | 3255 | 3259 | 3263 | 3267 | 3271 | 3275 | 3279 | 3283 | 3287 | 3291 | 3295 | 3299 | 3303 | 3307 | 3311 | 3315 | 3319 | 3323 | 3327 | 3331 | 3335 | 3339 | 3343 | 3347 | 3351 | 3355 | 3359 | 3363 | 3367 | 3371 | 3375 | 3379 | 3383 | 3387 | 3391 | 3395 | 3399 | 3403 | 3407 | 3411 | 3415 | 3419 | 3423 | 3427 | 3431 | 3435 | 3439 | 3443 | 3447 | 3451 | 3455 | 3459 | 3463 | 3467 | 3471 | 3475 | 3479 | 3483 | 3487 | 3491 | 3495 | 3499 | 3503 | 3507 | 3511 | 3515 | 3519 | 3523 | 3527 | 3531 | 3535 | 3539 | 3543 | 3547 | 3551 | 3555 | 3559 | 3563 | 3567 | 3571 | 3575 | 3579 | 3583 | 3587 | 3591 | 3595 | 3599 | 3603 | 3607 | 3611 | 3615 | 3619 | 3623 | 3627 | 3631 | 3635 | 3639 | 3643 | 3647 | 3651 | 3655 | 3659 | 3663 | 3667 | 3671 | 3675 | 3679 | 3683 | 3687 | 3691 | 3695 | 3699 | 3703 | 3707 | 3711 | 3715 | 3719 | 3723 | 3727 | 3731 | 3735 | 3739 | 3743 | 3747 | 3751 | 3755 | 3759 | 3763 | 3767 | 3771 | 3775 | 3779 | 3783 | 3787 | 3791 | 3795 | 3799 | 3803 | 3807 | 3811 | 3815 | 3819 | 3823 | 3827 | 3831 | 3835 | 3839 | 3843 | 3847 | 3851 | 3855 | 3859 | 3863 | 3867 | 3871 | 3875 | 3879 | 3883 | 3887 | 3891 | 3895 | 3899 | 3903 | 3907 | 3911 | 3915 | 3919 | 3923 | 3927 | 3931 | 3935 | 3939 | 3943 | 3947 | 3951 | 3955 | 3959 | 3963 | 3967 | 3971 | 3975 | 3979 | 3983 | 3987 | 3991 | 3995 | 3999 | 4003 | 4007 | 4011 | 4015 | 4019 | 4023 | 4027 | 4031 | 4035 | 4039 | 4043 | 4047 | 4051 | 4055 | 4059 | 4063 | 4067 | 4071 | 4075 | 4079 | 4083 | 4087 | 4091 | 4095 | 4099 | 4103 | 4107 | 4111 | 4115 | 4119 | 4123 | 4127 | 4131 | 4135 | 4139 | 4143 | 4147 | 4151 | 4155 | 4159 | 4163 | 4167 | 4171 | 4175 | 4179 | 4183 | 4187 | 4191 | 4195 | 4199 | 4203 | 4207 | 4211 | 4215 | 4219 | 4223 | 4227 | 4231 | 4235 | 4239 | 4243 | 4247 | 4251 | 4255 | 4259 | 4263 | 4267 | 4271 | 4275 | 4279 | 4283 | 4287 | 4291 | 4295 | 4299 | 4303 | 4307 | 4311 | 4315 | 4319 | 4323 | 4327 | 4331 | 4335 | 4339 | 4343 | 4347 | 4351 | 4355 | 4359 | 4363 | 4367 | 4371 | 4375 | 4379 | 4383 | 4387 | 4391 | 4395 | 4399 | 4403 | 4407 | 4411 | 4415 | 4419 | 4423 | 4427 | 4431 | 4435 | 4439 | 4443 | 4447 | 4451 | 4455 | 4459 | 4463 | 4467 | 4471 | 4475 | 4479 | 4483 | 4487 | 4491 | 4495 | 4499 | 4503 | 4507 | 4511 | 4515 | 4519 | 4523 | 4527 | 4531 | 4535 | 4539 | 4543 | 4547 | 4551 | 4555 | 4559 | 4563 | 4567 | 4571 | 4575 | 4579 | 4583 | 4587 | 4591 | 4595 | 4599 | 4603 | 4607 | 4611 | 4615 | 4619 | 4623 | 4627 | 4631 | 4635 | 4639 | 4643 | 4647 | 4651 | 4655 | 4659 | 4663 | 4667 | 4671 | 4675 | 4679 | 4683 | 4687 | 4691 | 4695 | 4699 | 4703 | 4707 | 4711 | 4715 | 4719 | 4723 | 4727 | 4731 | 4735 | 4739 | 4743 | 4747 | 4751 | 4755 | 4759 | 4763 | 4767 | 4771 | 4775 | 4779 | 4783 | 4787 | 4791 | 4795 | 4799 | 4803 | 4807 | 4811 | 4815 | 4819 | 4823 | 4827 | 4831 | 4835 | 4839 | 4843 | 4847 | 4851 | 4855 | 4859 | 4863 | 4867 | 4871 | 4875 | 4879 | 4883 | 4887 | 4891 | 4895 | 4899 | 4903 | 4907 | 4911 | 4915 | 4919 | 4923 | 4927 | 4931 | 4935 | 4939 | 4943 | 4947 | 4951 | 4955 | 4959 | 4963 | 4967 | 4971 | 4975 | 4979 | 4983 | 4987 | 4991 | 4995 | 4999 | 5003 | 5007 | 5011 | 5015 | 5019 | 5023 | 5027 | 5031 | 5035 | 5039 | 5043 | 5047 | 5051 | 5055 | 5059 | 5063 | 5067 | 5071 | 5075 | 5079 | 5083 | 5087 | 5091 | 5095 | 5099 | 5103 | 5107 | 5111 | 5115 | 5119 | 5123 | 5127 | 5131 | 5135 | 5139 | 5143 | 5147 | 5151 | 5155 | 5159 | 5163 | 5167 | 5171 | 5175 | 5179 | 5183 | 5187 | 5191 | 5195 | 5199 | 5203 | 5207 | 5211 | 5215 | 5219 | 5223 | 5227 | 5231 | 5235 | 5239 | 5243 | 5247 | 5251 | 5255 | 5259 | 5263 | 5267 | 5271 | 5275 | 5279 | 5283 | 5287 | 5291 | 5295 | 5299 | 5303 | 5307 | 5311 | 5315 | 5319 | 5323 | 5327 | 5331 | 5335 | 5339 | 5343 | 5347 | 5351 | 5355 | 5359 | 5363 | 5367 | 5371 | 5375 | 5379 | 5383 | 5387 | 5391 | 5395 | 5399 | 5403 | 5407 | 5411 | 5415 |

COOLING PERFORMANCE DATA

PG1330**M41A

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *GP1330**M41A*

Design Subcooling, 7 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 5°F @ the compressor suction access fitting connection.

| | Outdoor Ambient Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | |
|------|-----------------------------|------|---------|------|------|------|---------|------|------|------|---------|------|--------------------------------------|------|---------|------|------|------|---------|------|------|------|---------|------|
| | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | MBh | S/T | Delta T | KW | MBh | S/T | Delta T | KW | MBh | S/T | Delta T | KW | MBh | S/T | Delta T | KW | MBh | S/T | Delta T | KW | MBh | S/T | Delta T | KW |
| 1125 | 29.0 | 29.6 | 31.7 | 33.9 | 28.3 | 29.0 | 30.9 | 33.1 | 27.7 | 28.3 | 30.2 | 32.3 | 27.0 | 27.6 | 29.5 | 31.5 | 25.6 | 26.2 | 28.0 | 29.9 | 23.7 | 24.3 | 25.9 | 27.7 |
| | 1.00 | 0.93 | 0.76 | 0.56 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.86 | 0.64 | 1.00 | 1.00 | 0.87 | 0.65 |
| | 24 | 22 | 20 | 16 | 23 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 22 | 23 | 20 | 16 | 21 | 21 | 20 | 16 | 19 | 20 | 18 | 15 |
| | 2.12 | 2.16 | 2.23 | 2.29 | 2.27 | 2.32 | 2.39 | 2.46 | 2.41 | 2.46 | 2.53 | 2.61 | 2.53 | 2.58 | 2.66 | 2.75 | 2.63 | 2.68 | 2.77 | 2.86 | 2.72 | 2.77 | 2.86 | 2.96 |
| | 7.8 | 8.0 | 8.2 | 8.5 | 8.4 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.7 | 9.9 | 10.2 | 10.6 | 10.3 | 10.5 | 10.9 | 11.3 | 10.9 | 11.1 | 11.5 | 11.9 |
| | 243 | 262 | 276 | 288 | 273 | 294 | 310 | 323 | 310 | 334 | 352 | 368 | 353 | 380 | 401 | 419 | 397 | 428 | 452 | 471 | 439 | 473 | 499 | 520 |
| 1000 | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 152 | 128 | 136 | 149 | 158 | 135 | 143 | 156 | 166 | 141 | 150 | 164 | 174 | 146 | 155 | 169 | 180 |
| | 28.2 | 28.8 | 30.7 | 32.9 | 27.5 | 28.1 | 30.0 | 32.1 | 26.9 | 27.4 | 29.3 | 31.3 | 26.2 | 26.8 | 28.6 | 30.6 | 24.9 | 25.4 | 27.2 | 29.0 | 23.1 | 23.6 | 25.2 | 26.9 |
| | 0.94 | 0.89 | 0.72 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.83 | 0.62 |
| | 24 | 23 | 20 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 | 24 | 24 | 21 | 17 | 23 | 23 | 20 | 16 | 21 | 22 | 19 | 15 |
| | 2.10 | 2.15 | 2.21 | 2.28 | 2.26 | 2.30 | 2.37 | 2.44 | 2.39 | 2.44 | 2.51 | 2.59 | 2.51 | 2.56 | 2.64 | 2.72 | 2.61 | 2.66 | 2.75 | 2.84 | 2.69 | 2.75 | 2.84 | 2.93 |
| | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 9.0 | 9.2 | 9.5 | 9.9 | 9.6 | 9.8 | 10.1 | 10.5 | 10.2 | 10.4 | 10.8 | 11.2 | 10.8 | 11.0 | 11.4 | 11.8 |
| 875 | 241 | 259 | 273 | 285 | 270 | 291 | 307 | 320 | 307 | 331 | 349 | 364 | 350 | 376 | 398 | 415 | 394 | 423 | 447 | 466 | 435 | 468 | 494 | 515 |
| | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 147 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 144 | 154 | 168 | 179 |
| | 26.0 | 26.6 | 28.4 | 30.3 | 25.4 | 25.9 | 27.7 | 29.6 | 24.8 | 25.3 | 27.1 | 28.9 | 24.2 | 24.7 | 26.4 | 28.2 | 23.0 | 23.5 | 25.1 | 26.8 | 21.3 | 21.7 | 23.2 | 24.8 |
| | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.04 | 0.97 | 0.79 | 0.59 | 1.04 | 0.98 | 0.80 | 0.60 |
| | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 23 | 22 | 19 | 16 |
| | 2.06 | 2.10 | 2.16 | 2.22 | 2.20 | 2.25 | 2.32 | 2.39 | 2.33 | 2.38 | 2.45 | 2.53 | 2.46 | 2.50 | 2.58 | 2.66 | 2.55 | 2.60 | 2.68 | 2.77 | 2.63 | 2.69 | 2.77 | 2.86 |
| 85 | 7.6 | 7.7 | 8.0 | 8.2 | 8.1 | 8.3 | 8.6 | 8.9 | 8.8 | 9.0 | 9.3 | 9.6 | 9.4 | 9.6 | 9.9 | 10.2 | 9.9 | 10.2 | 10.5 | 10.9 | 10.5 | 10.7 | 11.1 | 11.5 |
| | 233 | 251 | 265 | 277 | 262 | 282 | 298 | 310 | 298 | 321 | 339 | 353 | 339 | 365 | 386 | 402 | 382 | 411 | 434 | 452 | 422 | 454 | 479 | 500 |
| | 112 | 119 | 130 | 139 | 118 | 126 | 137 | 146 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 160 | 135 | 144 | 157 | 168 | 140 | 149 | 163 | 173 |
| | 29.5 | 30.1 | 31.5 | 33.6 | 28.8 | 29.4 | 30.8 | 32.8 | 28.1 | 28.7 | 30.0 | 32.1 | 27.5 | 28.0 | 29.3 | 31.3 | 26.1 | 26.6 | 27.8 | 29.7 | 24.2 | 24.6 | 25.8 | 27.5 |
| | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.84 |
| | 24 | 25 | 23 | 20 | 24 | 24 | 24 | 20 | 23 | 23 | 24 | 20 | 22 | 23 | 24 | 21 | 21 | 22 | 23 | 20 | 20 | 20 | 21 | 19 |
| 1125 | 2.13 | 2.18 | 2.24 | 2.31 | 2.29 | 2.34 | 2.41 | 2.48 | 2.43 | 2.48 | 2.55 | 2.63 | 2.55 | 2.60 | 2.68 | 2.77 | 2.65 | 2.71 | 2.79 | 2.88 | 2.74 | 2.80 | 2.89 | 2.98 |
| | 7.9 | 8.1 | 8.3 | 8.6 | 8.5 | 8.7 | 8.9 | 9.3 | 9.2 | 9.4 | 9.7 | 10.0 | 9.8 | 10.0 | 10.3 | 10.7 | 10.4 | 10.6 | 11.0 | 11.4 | 11.0 | 11.2 | 11.6 | 12.0 |
| | 245 | 264 | 279 | 291 | 275 | 296 | 313 | 326 | 313 | 337 | 356 | 371 | 357 | 384 | 405 | 423 | 401 | 432 | 456 | 476 | 444 | 477 | 504 | 526 |
| | 118 | 125 | 137 | 146 | 125 | 132 | 145 | 154 | 129 | 138 | 150 | 160 | 136 | 145 | 158 | 168 | 142 | 152 | 165 | 176 | 147 | 157 | 171 | 182 |
| | 28.7 | 29.2 | 30.6 | 32.6 | 28.0 | 28.5 | 29.9 | 31.9 | 27.3 | 27.9 | 29.2 | 31.1 | 26.7 | 27.2 | 28.5 | 30.4 | 25.3 | 25.8 | 27.0 | 28.8 | 23.5 | 23.9 | 25.0 | 26.7 |
| | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 0.99 | 0.80 |
| 1000 | 26 | 26 | 24 | 21 | 26 | 26 | 25 | 21 | 25 | 26 | 25 | 21 | 25 | 25 | 25 | 21 | 23 | 24 | 24 | 21 | 22 | 22 | 23 | 20 |
| | 2.12 | 2.16 | 2.23 | 2.29 | 2.27 | 2.32 | 2.39 | 2.46 | 2.41 | 2.46 | 2.53 | 2.61 | 2.53 | 2.58 | 2.66 | 2.75 | 2.63 | 2.68 | 2.77 | 2.86 | 2.72 | 2.77 | 2.86 | 2.96 |
| | 7.8 | 8.0 | 8.2 | 8.5 | 8.4 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.7 | 9.9 | 10.2 | 10.6 | 10.3 | 10.5 | 10.9 | 11.3 | 10.9 | 11.1 | 11.5 | 11.9 |
| | 243 | 262 | 276 | 288 | 273 | 294 | 310 | 323 | 310 | 334 | 352 | 368 | 353 | 380 | 401 | 419 | 397 | 428 | 452 | 471 | 439 | 473 | 499 | 520 |
| | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 152 | 128 | 136 | 149 | 158 | 135 | 143 | 156 | 166 | 141 | 150 | 164 | 174 | 146 | 155 | 169 | 180 |
| | 26.4 | 27.0 | 28.2 | 30.1 | 25.8 | 26.3 | 27.6 | 29.4 | 25.2 | 25.7 | 26.9 | 28.7 | 24.6 | 25.1 | 26.3 | 28.0 | 23.4 | 23.8 | 25.0 | 26.6 | 21.7 | 22.1 | 23.1 | 24.7 |
| 875 | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 |
| | 27 | 26 | 25 | 21 | 27 | 26 | 25 | 22 | 26 | 26 | 25 | 22 | 26 | 26 | 25 | 22 | 25 | 25 | 25 | 21 | 23 | 23 | 23 | 20 |
| | 2.07 | 2.11 | 2.17 | 2.24 | 2.22 | 2.27 | 2.33 | 2.41 | 2.35 | 2.40 | 2.47 | 2.55 | 2.47 | 2.52 | 2.60 | 2.68 | 2.57 | 2.62 | 2.70 | 2.79 | 2.65 | 2.71 | 2.79 | 2.88 |
| | 7.6 | 7.8 | 8.0 | 8.3 | 8.2 | 8.4 | 8.6 | 8.9 | 8.9 | 9.1 | 9.3 | 9.7 | 9.4 | 9.7 | 10.0 | 10.3 | 10.0 | 10.2 | 10.6 | 11.0 | 10.6 | 10.8 | 11.2 | 11.6 |
| | 236 | 254 | 268 | 279 | 265 | 285 | 301 | 314 | 301 | 324 | 342 | 357 | 343 | 369 | 389 | 406 | 386 | 415 | 438 | 457 | 426 | 458 | 484 | 505 |
| | 113 | 120 | 131 | 140 | 120 | 127 | 139 | 148 | 124 | 132 | 144 | 154 | 131 | 139 | 152 | 161 | 137 | 146 | 159 | 169 | 141 | 151 | 164 | 175 |

* NOTE: Shaded area reflects AHRI rating conditions
High and low pressures are measured at the liquid and suction access fittings.

KW = Total system power
AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

IDB: Entering Indoor Dry Bulb Temperature
IDB: Entering Indoor Wet Bulb Temperature

COOLING PERFORMANCE DATA

PG1336M41(A/C)***

MODEL: *PG1336*M41A*** **EXPANDED PERFORMANCE DATA** **COOLING OPERATION**

Design Subcooling, 10 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 6 °F @ the compressor suction access fitting connection.

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 |
| 80 | 1350 | MBh | 36.3 | 37.1 | 39.6 | 42.4 | 35.5 | 36.2 | 38.7 | 41.4 | 34.6 | 35.4 | 37.8 | 40.4 | 33.8 | 34.5 | 36.9 | 39.4 | 32.1 | 32.8 | 35.0 | 37.4 | 29.7 | 30.4 | 32.4 | 34.7 | | | | | |
| | | S/T | 1.00 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.84 | 0.63 | 1.00 | 1.00 | 0.85 | 0.64 | | | | | |
| | | Delta T | 25 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 23 | 24 | 20 | 16 | 22 | 22 | 20 | 16 | 20 | 21 | 19 | 15 | | | | | |
| | | KW | 2.61 | 2.66 | 2.74 | 2.83 | 2.80 | 2.86 | 2.95 | 3.04 | 2.97 | 3.04 | 3.13 | 3.23 | 3.12 | 3.19 | 3.29 | 3.40 | 3.25 | 3.32 | 3.43 | 3.54 | 3.36 | 3.44 | 3.55 | 3.66 | | | | | |
| | | AMPS | 11.3 | 11.5 | 11.8 | 12.2 | 12.0 | 12.3 | 12.6 | 13.0 | 12.9 | 13.1 | 13.5 | 13.9 | 13.6 | 13.9 | 14.3 | 14.8 | 14.4 | 14.4 | 14.7 | 15.1 | 15.6 | 15.1 | 15.4 | 15.9 | 16.4 | | | | |
| | | HI PR | 255 | 274 | 289 | 302 | 286 | 307 | 325 | 338 | 325 | 350 | 369 | 385 | 370 | 398 | 420 | 438 | 416 | 448 | 473 | 493 | 460 | 495 | 523 | 545 | | | | | |
| | | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | | | | | |
| | | MBh | 35.3 | 36.0 | 38.5 | 41.1 | 34.4 | 35.2 | 37.6 | 40.2 | 33.6 | 34.3 | 36.7 | 39.2 | 32.8 | 33.5 | 35.8 | 38.3 | 31.2 | 31.8 | 34.0 | 36.4 | 28.9 | 29.5 | 31.5 | 33.7 | | | | | |
| | | S/T | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 0.99 | 0.81 | 0.60 | 1.00 | 1.00 | 0.81 | 0.61 | | | | | |
| | | Delta T | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 24 | 24 | 21 | 17 | 22 | 23 | 20 | 16 | | | | | |
| 80 | 1200 | KW | 2.59 | 2.64 | 2.72 | 2.81 | 2.78 | 2.84 | 2.93 | 3.02 | 2.95 | 3.01 | 3.11 | 3.21 | 3.10 | 3.17 | 3.27 | 3.37 | 3.23 | 3.30 | 3.40 | 3.51 | 3.33 | 3.41 | 3.52 | 3.63 | | | | | |
| | | AMPS | 11.2 | 11.4 | 11.7 | 12.1 | 11.9 | 12.2 | 12.5 | 12.9 | 12.8 | 13.0 | 13.4 | 13.8 | 13.5 | 13.8 | 14.2 | 14.7 | 14.3 | 14.6 | 15.0 | 15.5 | 15.0 | 15.3 | 15.8 | 16.3 | | | | | |
| | | HI PR | 252 | 271 | 286 | 299 | 283 | 304 | 321 | 335 | 322 | 346 | 365 | 381 | 366 | 394 | 416 | 434 | 412 | 443 | 468 | 488 | 455 | 490 | 517 | 540 | | | | | |
| | | LO PR | 113 | 120 | 131 | 139 | 119 | 127 | 138 | 147 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 161 | 136 | 145 | 158 | 168 | 141 | 150 | 163 | 174 | | | | | |
| | | MBh | 32.5 | 33.2 | 35.5 | 38.0 | 31.8 | 32.5 | 34.7 | 37.1 | 31.0 | 31.7 | 33.9 | 36.2 | 30.3 | 30.9 | 33.0 | 35.3 | 28.8 | 29.4 | 31.4 | 33.6 | 26.6 | 27.2 | 29.1 | 31.1 | | | | | |
| | | S/T | 0.89 | 0.84 | 0.68 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.89 | 0.73 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.02 | 0.95 | 0.78 | 0.58 | 1.03 | 0.96 | 0.78 | 0.59 | | | | | |
| | | Delta T | 25 | 24 | 21 | 17 | 26 | 25 | 21 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 21 | 17 | 24 | 23 | 20 | 16 | | | | | |
| | | KW | 2.53 | 2.58 | 2.66 | 2.74 | 2.72 | 2.77 | 2.86 | 2.95 | 2.88 | 2.94 | 3.03 | 3.13 | 3.03 | 3.09 | 3.19 | 3.29 | 3.15 | 3.22 | 3.32 | 3.43 | 3.25 | 3.32 | 3.43 | 3.54 | | | | | |
| | | AMPS | 10.9 | 11.1 | 11.4 | 11.8 | 11.6 | 11.9 | 12.2 | 12.6 | 12.5 | 12.7 | 13.1 | 13.5 | 13.2 | 13.5 | 13.9 | 14.3 | 13.9 | 14.2 | 14.6 | 15.1 | 14.6 | 14.9 | 15.4 | 15.9 | | | | | |
| | | HI PR | 244 | 263 | 278 | 290 | 274 | 295 | 312 | 325 | 312 | 336 | 354 | 370 | 355 | 382 | 404 | 421 | 400 | 430 | 454 | 474 | 442 | 475 | 502 | 523 | | | | | |
| LO PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 137 | 145 | 159 | 169 | | | | | | | |
| 85 | 1350 | MBh | 36.9 | 37.7 | 39.4 | 42.1 | 36.1 | 36.8 | 38.5 | 41.1 | 35.2 | 35.9 | 37.6 | 40.1 | 34.4 | 35.0 | 36.7 | 39.1 | 32.6 | 33.3 | 34.9 | 37.2 | 30.2 | 30.8 | 32.3 | 34.4 | | | | | |
| | | S/T | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.92 | 0.82 | 1.00 | 1.00 | 0.92 | 0.83 | | | | | |
| | | Delta T | 25 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 24 | 24 | 24 | 21 | 23 | 24 | 24 | 21 | 22 | 23 | 24 | 21 | 21 | 21 | 22 | 19 | | | | | |
| | | KW | 2.63 | 2.68 | 2.77 | 2.85 | 2.83 | 2.88 | 2.97 | 3.07 | 3.00 | 3.06 | 3.16 | 3.26 | 3.15 | 3.22 | 3.32 | 3.43 | 3.28 | 3.35 | 3.46 | 3.57 | 3.39 | 3.46 | 3.58 | 3.69 | | | | | |
| | | AMPS | 11.3 | 11.6 | 11.9 | 12.2 | 12.1 | 12.3 | 12.7 | 13.1 | 13.0 | 13.2 | 13.6 | 14.1 | 13.7 | 14.0 | 14.4 | 14.9 | 14.5 | 14.8 | 15.2 | 15.7 | 15.2 | 15.6 | 16.0 | 16.6 | | | | | |
| | | HI PR | 257 | 277 | 292 | 305 | 288 | 310 | 328 | 342 | 328 | 353 | 373 | 389 | 374 | 402 | 425 | 443 | 420 | 452 | 478 | 498 | 464 | 500 | 528 | 550 | | | | | |
| | | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 | | | | | |
| | | MBh | 35.9 | 36.6 | 38.3 | 40.9 | 35.0 | 35.7 | 37.4 | 39.9 | 34.2 | 34.9 | 36.5 | 39.0 | 33.4 | 34.0 | 35.6 | 38.0 | 31.7 | 32.3 | 33.8 | 36.1 | 29.4 | 29.9 | 31.3 | 33.4 | | | | | |
| | | S/T | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.79 | | | | | |
| | | Delta T | 27 | 26 | 25 | 21 | 27 | 27 | 25 | 22 | 26 | 27 | 25 | 22 | 26 | 26 | 25 | 22 | 24 | 25 | 25 | 22 | 22 | 23 | 23 | 20 | | | | | |
| 85 | 1200 | KW | 2.61 | 2.66 | 2.74 | 2.83 | 2.80 | 2.86 | 2.95 | 3.04 | 2.97 | 3.04 | 3.13 | 3.23 | 3.12 | 3.19 | 3.29 | 3.40 | 3.25 | 3.32 | 3.43 | 3.54 | 3.36 | 3.44 | 3.55 | 3.66 | | | | | |
| | | AMPS | 11.3 | 11.5 | 11.8 | 12.2 | 12.0 | 12.3 | 12.6 | 13.0 | 12.9 | 13.1 | 13.5 | 13.9 | 13.6 | 13.9 | 14.3 | 14.8 | 14.4 | 14.7 | 15.1 | 15.6 | 15.1 | 15.4 | 15.9 | 16.4 | | | | | |
| | | HI PR | 255 | 274 | 289 | 302 | 286 | 307 | 325 | 338 | 325 | 350 | 369 | 385 | 370 | 398 | 420 | 438 | 416 | 448 | 473 | 493 | 460 | 495 | 523 | 545 | | | | | |
| | | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | | | | | |
| | | MBh | 33.1 | 33.7 | 35.3 | 37.7 | 32.3 | 33.0 | 34.5 | 36.8 | 31.6 | 32.2 | 33.7 | 36.0 | 30.8 | 31.4 | 32.9 | 35.1 | 29.3 | 29.8 | 31.2 | 33.3 | 27.1 | 27.6 | 28.9 | 30.9 | | | | | |
| | | S/T | 0.94 | 0.90 | 0.82 | 0.66 | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.96 | 0.87 | 0.70 | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.94 | 0.76 | | | | | |
| | | Delta T | 27 | 27 | 25 | 22 | 27 | 27 | 26 | 22 | 28 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 26 | 26 | 25 | 22 | 24 | 24 | 24 | 21 | | | | | |
| | | KW | 2.55 | 2.60 | 2.68 | 2.76 | 2.74 | 2.79 | 2.88 | 2.97 | 2.90 | 2.96 | 3.06 | 3.15 | 3.05 | 3.11 | 3.21 | 3.32 | 3.17 | 3.24 | 3.34 | 3.45 | 3.28 | 3.35 | 3.46 | 3.57 | | | | | |
| | | AMPS | 11.0 | 11.2 | 11.5 | 11.9 | 11.7 | 12.0 | 12.3 | 12.7 | 12.6 | 12.8 | 13.2 | 13.6 | 13.3 | 13.6 | 14.0 | 14.4 | 14.0 | 14.3 | 14.7 | 15.2 | 14.8 | 15.1 | 15.5 | 16.0 | | | | | |
| | | HI PR | 247 | 266 | 281 | 293 | 277 | 298 | 315 | 328 | 315 | 339 | 358 | 373 | 359 | 386 | 408 | 425 | 404 | 434 | 459 | 478 | 446 | 480 | 507 | 529 | | | | | |
| LO PR | 110 | 117 | 128 | 136 | 117 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 171 | | | | | | | |

* NOTE: Shaded area reflects AHRI rating conditions. IDB: Entering Indoor Dry Bulb Temperature. AMPS: Unit amps (comp. + evaporator + condenser fan motors). KW = Total system power. High and low pressures are measured at the liquid and suction access fittings.

COOLING PERFORMANCE DATA

*PG1342***M41(A/D)*

Design Subcooling, 10 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 9 °F @ the compressor suction access fitting connection.

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|----|----|----|----|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 |
| 70 | 1440 | MBh | 39.7 | 41.1 | 45.1 | - | 38.8 | 40.2 | 44.0 | - | 37.8 | 39.2 | 43.0 | - | 36.9 | 38.3 | 41.9 | - | 35.1 | 36.4 | 39.8 | - | 32.5 | 33.7 | 36.9 | - | | | | | |
| | | S/T | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.87 | 0.73 | 0.50 | - | 0.88 | 0.73 | 0.51 | - | | | | | |
| | | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | |
| | | KW | 2.93 | 2.99 | 3.07 | - | 3.13 | 3.20 | 3.29 | - | 3.32 | 3.38 | 3.48 | - | 3.47 | 3.55 | 3.65 | - | 3.61 | 3.69 | 3.80 | - | 3.73 | 3.81 | 3.92 | - | | | | | |
| | | A/MPs | 12.6 | 12.9 | 13.2 | - | 13.5 | 13.7 | 14.1 | - | 14.4 | 14.7 | 15.1 | - | 15.3 | 15.6 | 16.0 | - | 16.1 | 16.5 | 16.9 | - | 16.9 | 17.3 | 17.8 | - | | | | | |
| | 1280 | HIPR | 237 | 255 | 269 | - | 266 | 286 | 302 | - | 302 | 325 | 343 | - | 344 | 370 | 391 | - | 387 | 417 | 440 | - | 428 | 460 | 486 | - | | | | | |
| | | LO PR | 113 | 120 | 131 | - | 119 | 127 | 138 | - | 124 | 132 | 144 | - | 130 | 138 | 151 | - | 136 | 145 | 158 | - | 141 | 150 | 164 | - | | | | | |
| | | MBh | 38.5 | 39.9 | 43.8 | - | 37.6 | 39.0 | 42.7 | - | 36.7 | 38.1 | 41.7 | - | 35.8 | 37.1 | 40.7 | - | 34.1 | 35.3 | 38.7 | - | 31.5 | 32.7 | 35.8 | - | | | | | |
| | | S/T | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.77 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | | | | | |
| | | Delta T | 20 | 17 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 19 | 16 | 12 | - | | | | | |
| 1125 | KW | 2.91 | 2.96 | 3.05 | - | 3.11 | 3.17 | 3.27 | - | 3.29 | 3.36 | 3.46 | - | 3.45 | 3.52 | 3.63 | - | 3.58 | 3.66 | 3.77 | - | 3.70 | 3.78 | 3.89 | - | | | | | | |
| | A/MPs | 12.5 | 12.8 | 13.1 | - | 13.4 | 13.6 | 14.0 | - | 14.3 | 14.6 | 15.0 | - | 15.2 | 15.5 | 15.9 | - | 16.0 | 16.3 | 16.8 | - | 16.8 | 17.2 | 17.7 | - | | | | | | |
| | HIPR | 234 | 252 | 266 | - | 263 | 283 | 299 | - | 299 | 322 | 340 | - | 341 | 367 | 387 | - | 383 | 413 | 436 | - | 424 | 456 | 481 | - | | | | | | |
| | LO PR | 112 | 119 | 130 | - | 118 | 125 | 137 | - | 122 | 130 | 142 | - | 129 | 137 | 149 | - | 135 | 143 | 157 | - | 139 | 148 | 162 | - | | | | | | |
| | MBh | 35.6 | 36.9 | 40.4 | - | 34.7 | 36.0 | 39.4 | - | 33.9 | 35.1 | 38.5 | - | 33.1 | 34.3 | 37.6 | - | 31.4 | 32.6 | 35.7 | - | 29.1 | 30.2 | 33.1 | - | | | | | | |
| 75 | 1440 | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | | | | | |
| | | Delta T | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 19 | 17 | 13 | - | | | | | |
| | | KW | 2.85 | 2.90 | 2.98 | - | 3.04 | 3.10 | 3.19 | - | 3.22 | 3.28 | 3.38 | - | 3.37 | 3.44 | 3.54 | - | 3.50 | 3.57 | 3.68 | - | 3.61 | 3.69 | 3.80 | - | | | | | |
| | | A/MPs | 12.3 | 12.5 | 12.8 | - | 13.1 | 13.3 | 13.7 | - | 14.0 | 14.3 | 14.7 | - | 14.8 | 15.1 | 15.5 | - | 15.6 | 15.9 | 16.4 | - | 16.4 | 16.8 | 17.2 | - | | | | | |
| | | HIPR | 227 | 245 | 258 | - | 255 | 275 | 290 | - | 290 | 312 | 330 | - | 331 | 356 | 376 | - | 372 | 400 | 423 | - | 411 | 442 | 467 | - | | | | | |
| | 1280 | LO PR | 108 | 115 | 126 | - | 114 | 122 | 133 | - | 119 | 126 | 138 | - | 125 | 133 | 145 | - | 131 | 139 | 152 | - | 135 | 144 | 157 | - | | | | | |
| | | MBh | 40.4 | 41.6 | 45.0 | 48.3 | 39.4 | 40.6 | 43.9 | 47.2 | 38.5 | 39.6 | 42.9 | 46.0 | 37.5 | 38.7 | 41.8 | 44.9 | 35.7 | 36.7 | 39.7 | 42.7 | 33.0 | 34.0 | 36.8 | 39.5 | | | | | |
| | | S/T | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.92 | 0.83 | 0.62 | 0.40 | 0.95 | 0.85 | 0.65 | 0.41 | 0.99 | 0.88 | 0.67 | 0.43 | 1.00 | 0.89 | 0.68 | 0.43 | | | | | |
| | | Delta T | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | | | | | |
| | | KW | 2.95 | 3.01 | 3.09 | 3.19 | 3.16 | 3.22 | 3.32 | 3.42 | 3.34 | 3.41 | 3.51 | 3.62 | 3.50 | 3.57 | 3.68 | 3.80 | 3.64 | 3.71 | 3.83 | 3.95 | 3.76 | 3.84 | 3.96 | 4.08 | | | | | |
| 1125 | A/MPs | 12.7 | 13.0 | 13.3 | 13.7 | 13.6 | 13.8 | 14.2 | 14.7 | 14.6 | 14.9 | 15.3 | 15.8 | 15.4 | 15.7 | 16.2 | 16.7 | 16.2 | 16.6 | 17.1 | 17.6 | 17.1 | 17.5 | 18.0 | 18.6 | | | | | | |
| | HIPR | 239 | 257 | 272 | 283 | 268 | 289 | 305 | 318 | 305 | 328 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 444 | 464 | 432 | 465 | 491 | 512 | | | | | | |
| | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 138 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | | | | | | |
| | MBh | 39.2 | 40.3 | 43.7 | 46.9 | 38.3 | 39.4 | 42.7 | 45.8 | 37.4 | 38.5 | 41.6 | 44.7 | 36.5 | 37.5 | 40.6 | 43.6 | 34.6 | 35.7 | 38.6 | 41.4 | 32.1 | 33.0 | 35.7 | 38.4 | | | | | | |
| | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 | | | | | | |
| 75 | 1440 | Delta T | 23 | 21 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 23 | 22 | 18 | 12 | 22 | 20 | 17 | 11 | | | | | |
| | | KW | 2.93 | 2.99 | 3.07 | 3.16 | 3.14 | 3.20 | 3.29 | 3.39 | 3.32 | 3.38 | 3.48 | 3.59 | 3.48 | 3.55 | 3.65 | 3.77 | 3.61 | 3.69 | 3.80 | 3.92 | 3.73 | 3.81 | 3.92 | 4.05 | | | | | |
| | | A/MPs | 12.6 | 12.9 | 13.2 | 13.6 | 13.5 | 13.7 | 14.1 | 14.6 | 14.4 | 14.7 | 15.2 | 15.6 | 15.3 | 15.6 | 16.0 | 16.6 | 16.1 | 16.5 | 16.9 | 17.5 | 16.9 | 17.3 | 17.8 | 18.4 | | | | | |
| | | HIPR | 237 | 255 | 269 | 281 | 266 | 286 | 302 | 315 | 302 | 325 | 343 | 358 | 344 | 370 | 391 | 408 | 387 | 417 | 440 | 459 | 428 | 460 | 486 | 507 | | | | | |
| | | LO PR | 113 | 120 | 131 | 139 | 119 | 127 | 138 | 147 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 161 | 136 | 145 | 158 | 168 | 141 | 150 | 164 | 174 | | | | | |
| | 1280 | MBh | 36.2 | 37.2 | 40.3 | 43.3 | 35.3 | 36.4 | 39.4 | 42.3 | 34.5 | 35.5 | 38.4 | 41.2 | 33.6 | 34.6 | 37.5 | 40.2 | 32.0 | 32.9 | 35.6 | 38.2 | 29.6 | 30.5 | 33.0 | 35.4 | | | | | |
| | | S/T | 0.80 | 0.71 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 | | | | | |
| | | Delta T | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 12 | | | | | |
| | | KW | 2.87 | 2.92 | 3.00 | 3.09 | 3.07 | 3.13 | 3.22 | 3.31 | 3.24 | 3.31 | 3.40 | 3.51 | 3.40 | 3.46 | 3.57 | 3.68 | 3.53 | 3.60 | 3.71 | 3.83 | 3.64 | 3.72 | 3.83 | 3.95 | | | | | |
| | | A/MPs | 12.3 | 12.6 | 12.9 | 13.3 | 13.2 | 13.4 | 13.8 | 14.2 | 14.1 | 14.4 | 14.8 | 15.3 | 14.9 | 15.2 | 15.7 | 16.2 | 15.7 | 16.1 | 16.5 | 17.1 | 16.5 | 16.9 | 17.4 | 18.0 | | | | | |
| 1125 | HIPR | 230 | 247 | 261 | 272 | 258 | 277 | 293 | 306 | 293 | 315 | 333 | 347 | 334 | 359 | 379 | 396 | 376 | 404 | 427 | 445 | 415 | 447 | 472 | 492 | | | | | | |
| | LO PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 141 | 153 | 163 | 137 | 145 | 159 | 169 | | | | | | |

* IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.

NOTE: Shaded area is ACCA (TV) conditions
KW = Total system power
AMPS: Unit amps (comp. + evaporator + condenser fan motors)

COOLING PERFORMANCE DATA

PG1342M41(A/D)***

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1342***M41(A/D)*

Design Subcooling, 10 °F @ the liquid access fitting connection ARI 95 test conditions - Design Superheat 9 °F @ the compressor suction access fitting connection.

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | |
| 80 | 1440 | MBh | 41.1 | 42.0 | 44.8 | 47.9 | 40.1 | 41.0 | 43.8 | 46.8 | 39.2 | 40.0 | 42.8 | 45.7 | 38.2 | 39.0 | 41.7 | 44.6 | 36.3 | 37.1 | 39.6 | 42.4 | 34.3 | 35.1 | 37.6 | 40.4 | 32.3 | 33.1 | 35.6 | 38.4 |
| | | S/T | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.83 | 0.62 |
| | | Delta T | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 24 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 21 | 22 | 20 | 16 | 21 | 22 | 20 | 16 |
| | | KW | 2.97 | 3.03 | 3.12 | 3.21 | 3.18 | 3.24 | 3.34 | 3.44 | 3.37 | 3.43 | 3.54 | 3.65 | 3.53 | 3.60 | 3.71 | 3.83 | 3.67 | 3.74 | 3.86 | 3.98 | 3.79 | 3.87 | 3.99 | 4.11 | 3.87 | 3.95 | 4.07 | 4.19 |
| | | AMPS | 12.8 | 13.1 | 13.4 | 13.8 | 13.7 | 13.9 | 14.3 | 14.8 | 14.7 | 15.0 | 15.4 | 15.9 | 15.5 | 15.8 | 16.3 | 16.8 | 16.4 | 16.7 | 17.2 | 17.8 | 17.2 | 17.6 | 18.1 | 18.7 | 17.6 | 18.0 | 18.5 | 19.1 |
| | | HI PR | 242 | 260 | 275 | 286 | 271 | 292 | 308 | 321 | 308 | 332 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 470 | 496 | 517 | 468 | 502 | 528 | 549 |
| | | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 147 | 156 | 133 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 | 151 | 160 | 174 | 185 |
| | | MBh | 39.9 | 40.8 | 43.5 | 46.5 | 39.0 | 39.8 | 42.5 | 45.5 | 38.0 | 38.9 | 41.5 | 44.4 | 37.1 | 37.9 | 40.5 | 43.3 | 35.2 | 36.0 | 38.5 | 41.1 | 32.6 | 33.4 | 35.6 | 38.1 | 30.1 | 30.8 | 32.9 | 35.2 |
| | | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 | 1.00 | 0.99 | 0.81 | 0.61 |
| | | Delta T | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 25 | 25 | 22 | 17 | 23 | 23 | 20 | 16 | 23 | 23 | 20 | 16 |
| 85 | 1280 | KW | 2.95 | 3.01 | 3.10 | 3.19 | 3.16 | 3.22 | 3.32 | 3.42 | 3.34 | 3.41 | 3.51 | 3.62 | 3.50 | 3.57 | 3.68 | 3.80 | 3.64 | 3.71 | 3.83 | 3.95 | 3.76 | 3.84 | 3.96 | 4.08 | 3.84 | 3.92 | 4.04 | 4.16 |
| | | AMPS | 12.7 | 13.0 | 13.3 | 13.7 | 13.6 | 13.8 | 14.2 | 14.7 | 14.6 | 14.9 | 15.3 | 15.8 | 15.4 | 15.7 | 16.2 | 16.7 | 16.2 | 16.6 | 17.1 | 17.6 | 17.1 | 17.5 | 18.0 | 18.6 | 17.5 | 18.0 | 18.5 | 19.1 |
| | | HI PR | 239 | 257 | 272 | 284 | 268 | 289 | 305 | 318 | 305 | 329 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 444 | 464 | 432 | 465 | 491 | 512 | 464 | 498 | 524 | 545 |
| | | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 138 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | 150 | 159 | 173 | 184 |
| | | MBh | 36.8 | 37.6 | 40.2 | 43.0 | 36.0 | 36.7 | 39.3 | 42.0 | 35.1 | 35.9 | 38.3 | 41.0 | 34.2 | 35.0 | 37.4 | 40.0 | 32.5 | 33.2 | 35.5 | 38.0 | 30.1 | 30.8 | 32.9 | 35.2 | 27.6 | 28.2 | 30.1 | 32.4 |
| | | S/T | 0.88 | 0.82 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.01 | 0.94 | 0.77 | 0.57 | 1.00 | 0.94 | 0.77 | 0.57 |
| | | Delta T | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 25 | 22 | 18 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 |
| | | KW | 2.89 | 2.94 | 3.03 | 3.12 | 3.09 | 3.15 | 3.24 | 3.34 | 3.27 | 3.33 | 3.43 | 3.53 | 3.42 | 3.49 | 3.60 | 3.71 | 3.55 | 3.63 | 3.74 | 3.86 | 3.67 | 3.75 | 3.86 | 3.98 | 3.75 | 3.83 | 3.94 | 4.06 |
| | | AMPS | 12.4 | 12.7 | 13.0 | 13.4 | 13.3 | 13.5 | 13.9 | 14.3 | 14.2 | 14.5 | 14.9 | 15.4 | 15.0 | 15.3 | 15.8 | 16.3 | 15.9 | 16.2 | 16.7 | 17.2 | 16.7 | 17.0 | 17.5 | 18.1 | 17.0 | 17.5 | 18.0 | 18.6 |
| | | HI PR | 232 | 250 | 264 | 275 | 260 | 280 | 296 | 309 | 296 | 319 | 336 | 351 | 337 | 363 | 383 | 400 | 379 | 408 | 431 | 450 | 419 | 451 | 476 | 497 | 451 | 485 | 510 | 531 |
| LO PR | 110 | 117 | 128 | 137 | 117 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 171 | 147 | 156 | 170 | 181 | | |
| 85 | 1440 | MBh | 41.8 | 42.6 | 44.6 | 47.6 | 40.8 | 41.6 | 43.6 | 46.5 | 39.9 | 40.6 | 42.5 | 45.4 | 38.9 | 39.6 | 41.5 | 44.3 | 36.9 | 37.6 | 39.4 | 42.1 | 34.2 | 34.9 | 36.5 | 39.0 | 31.5 | 32.1 | 33.9 | 36.3 |
| | | S/T | 1.00 | 0.96 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.81 | 1.00 | 1.00 | 1.00 | 0.81 |
| | | Delta T | 27 | 26 | 25 | 21 | 26 | 27 | 25 | 22 | 25 | 26 | 25 | 22 | 25 | 25 | 25 | 22 | 24 | 24 | 25 | 22 | 22 | 22 | 23 | 20 | 22 | 22 | 23 | 20 |
| | | KW | 2.99 | 3.05 | 3.14 | 3.23 | 3.21 | 3.27 | 3.37 | 3.47 | 3.39 | 3.46 | 3.57 | 3.68 | 3.56 | 3.63 | 3.74 | 3.86 | 3.70 | 3.77 | 3.89 | 4.01 | 3.82 | 3.90 | 4.02 | 4.15 | 3.90 | 4.02 | 4.14 | 4.27 |
| | | AMPS | 12.9 | 13.2 | 13.5 | 13.9 | 13.8 | 14.1 | 14.4 | 14.9 | 14.8 | 15.1 | 15.5 | 16.0 | 15.6 | 16.0 | 16.4 | 17.0 | 16.5 | 16.9 | 17.4 | 17.9 | 17.4 | 17.7 | 18.3 | 18.9 | 17.7 | 18.3 | 18.9 | 19.5 |
| | | HI PR | 244 | 263 | 277 | 289 | 274 | 295 | 311 | 325 | 311 | 335 | 354 | 369 | 355 | 382 | 403 | 420 | 399 | 429 | 453 | 473 | 441 | 474 | 501 | 523 | 501 | 534 | 561 | 583 |
| | | LO PR | 116 | 124 | 135 | 144 | 123 | 130 | 142 | 152 | 127 | 136 | 148 | 158 | 134 | 142 | 156 | 166 | 140 | 149 | 163 | 174 | 145 | 154 | 169 | 180 | 154 | 163 | 178 | 189 |
| | | MBh | 40.6 | 41.4 | 43.3 | 46.2 | 39.6 | 40.4 | 42.3 | 45.1 | 38.7 | 39.4 | 41.3 | 44.1 | 37.7 | 38.5 | 40.3 | 43.0 | 35.9 | 36.6 | 38.3 | 40.8 | 33.2 | 33.9 | 35.5 | 37.8 | 30.5 | 31.1 | 32.9 | 35.2 |
| | | S/T | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 |
| | | Delta T | 28 | 27 | 26 | 22 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 27 | 28 | 26 | 23 | 26 | 26 | 26 | 23 | 24 | 24 | 24 | 21 | 24 | 24 | 24 | 21 |
| 85 | 1280 | KW | 2.97 | 3.03 | 3.12 | 3.21 | 3.18 | 3.24 | 3.34 | 3.44 | 3.37 | 3.43 | 3.54 | 3.65 | 3.53 | 3.60 | 3.71 | 3.83 | 3.67 | 3.74 | 3.86 | 3.98 | 3.79 | 3.87 | 3.99 | 4.11 | 3.87 | 3.95 | 4.07 | 4.19 |
| | | AMPS | 12.8 | 13.1 | 13.4 | 13.8 | 13.7 | 13.9 | 14.3 | 14.8 | 14.7 | 15.0 | 15.4 | 15.9 | 15.5 | 15.8 | 16.3 | 16.8 | 16.4 | 16.7 | 17.2 | 17.8 | 17.2 | 17.6 | 18.1 | 18.7 | 17.6 | 18.0 | 18.5 | 19.1 |
| | | HI PR | 242 | 260 | 275 | 286 | 271 | 292 | 308 | 321 | 308 | 332 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 470 | 496 | 517 | 468 | 502 | 528 | 549 |
| | | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 147 | 156 | 133 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 | 151 | 160 | 174 | 185 |
| | | MBh | 37.5 | 38.2 | 40.0 | 42.7 | 36.6 | 37.3 | 39.1 | 41.7 | 35.7 | 36.4 | 38.1 | 40.7 | 34.8 | 35.5 | 37.2 | 39.7 | 33.1 | 33.7 | 35.3 | 37.7 | 30.7 | 31.3 | 32.7 | 34.9 | 28.2 | 28.7 | 30.1 | 32.3 |
| | | S/T | 0.92 | 0.89 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.92 | 0.74 |
| | | Delta T | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 27 | 23 | 27 | 28 | 26 | 23 | 25 | 25 | 25 | 21 | 25 | 25 | 25 | 21 |
| | | KW | 2.91 | 2.96 | 3.05 | 3.14 | 3.11 | 3.17 | 3.27 | 3.36 | 3.29 | 3.36 | 3.46 | 3.56 | 3.45 | 3.52 | 3.62 | 3.74 | 3.58 | 3.66 | 3.77 | 3.89 | 3.70 | 3.77 | 3.89 | 4.01 | 3.77 | 3.85 | 3.97 | 4.09 |
| | | AMPS | 12.5 | 12.8 | 13.1 | 13.5 | 13.4 | 13.6 | 14.0 | 14.4 | 14.3 | 14.6 | 15.0 | 15.5 | 15.2 | 15.5 | 15.9 | 16.4 | 16.0 | 16.3 | 16.8 | 17.4 | 16.8 | 17.2 | 17.7 | 18.3 | 17.2 | 17.7 | 18.3 | 18.9 |
| | | HI PR | 234 | 252 | 266 | 278 | 263 | 283 | 299 | 312 | 299 | 322 | 340 | 354 | 341 | 367 | 387 | 404 | 383 | 412 | 435 | 454 | 423 | 456 | 481 | 502 | 454 | 488 | 513 | 534 |
| LO PR | 111 | 119 | 129 | 138 | 118 | 125 | 137 | 146 | 122 | 130 | 142 | 151 | 129 | 137 | 149 | 159 | 135 | 143 | 157 | 167 | 139 | 148 | 162 | 172 | 148 | 157 | 171 | 181 | | |

* NOTE: Shaded area reflects AHRl rating conditions
 High and low pressures are measured at the liquid and suction access fittings.
 IDB: Entering Indoor Dry Bulb Temperature
 AMPS: Unit amps (comp. + evaporator + condenser fan motors)
 KW = Total system power

COOLING PERFORMANCE DATA

PG1348**M41(A/E)

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

Design Subcooling, 12 °F @ the liquid access fitting connection AHRI95 test conditions. Design Superheat 12 °F @ the compressor suction access fitting connection.

| IDB* | Airflow | 65 | | | | | | | | | | | | | | | 75 | | | | | | | | | | | | | | | 85 | | | | | | | | | | | | | | | 95 | | | | | | | | | | | | | | | 105 | | | | | | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|--------------------------------------|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|-----------------------------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|------|------|------|---|
| | | 59 | | | | | 63 | | | | | 67 | | | | | 71 | | | | | 59 | | | | | 63 | | | | | 67 | | | | | 71 | | | | | 59 | | | | | 63 | | | | | 67 | | | | | 71 | | | | | 59 | | | | | 63 | | | | | 67 | | | | | 71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | 1700 | MBh | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 37.2 | 38.5 | 42.2 | - |
| | | S/T | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HI/PR | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LO/PR | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COOLING PERFORMANCE DATA

PG1348M41(A/E)***

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1348***M41(A/E)*

Design Subcooling, 12 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 12 °F @ the compressor suction access fitting connection.

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| 80 | MBh | 47.0 | 48.0 | 51.3 | 54.8 | 45.9 | 46.9 | 50.1 | 53.5 | 44.8 | 45.8 | 48.9 | 52.3 | 43.7 | 44.7 | 47.7 | 51.0 | 41.5 | 42.4 | 45.3 | 48.4 | 41.5 | 42.4 | 45.3 | 48.4 | 38.5 | 39.3 | 42.0 | 44.9 |
| | S/T | 0.97 | 0.91 | 0.74 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.85 | 0.63 | 1.00 | 1.00 | 0.85 | 0.63 | 1.00 | 1.00 | 0.85 | 0.64 |
| | Delta T | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 24 | 24 | 21 | 17 | 24 | 24 | 21 | 17 | 22 | 23 | 21 | 17 | 22 | 23 | 21 | 17 | 21 | 21 | 19 | 15 |
| | KW | 3.33 | 3.39 | 3.49 | 3.59 | 3.56 | 3.63 | 3.74 | 3.85 | 3.77 | 3.84 | 3.96 | 4.08 | 3.95 | 4.03 | 4.16 | 4.29 | 4.11 | 4.19 | 4.32 | 4.46 | 4.11 | 4.19 | 4.32 | 4.46 | 4.24 | 4.33 | 4.46 | 4.61 |
| | AMPS | 16.1 | 16.4 | 16.8 | 17.3 | 17.1 | 17.4 | 17.8 | 18.3 | 18.2 | 18.5 | 19.0 | 19.6 | 19.2 | 19.5 | 20.0 | 20.6 | 20.1 | 20.5 | 21.0 | 21.7 | 20.1 | 20.5 | 21.0 | 21.7 | 21.1 | 21.5 | 22.0 | 22.7 |
| | Hi PR | 246 | 265 | 279 | 291 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 357 | 385 | 406 | 424 | 402 | 433 | 457 | 477 | 402 | 433 | 457 | 477 | 444 | 478 | 505 | 527 |
| | LO PR | 118 | 125 | 137 | 145 | 124 | 132 | 144 | 154 | 129 | 137 | 150 | 160 | 136 | 144 | 157 | 168 | 142 | 151 | 165 | 176 | 142 | 151 | 165 | 176 | 147 | 156 | 171 | 182 |
| | MBh | 46.3 | 47.3 | 50.5 | 54.0 | 45.2 | 46.2 | 49.4 | 52.8 | 44.1 | 45.1 | 48.2 | 51.5 | 43.1 | 44.0 | 47.0 | 50.2 | 40.9 | 41.8 | 44.7 | 47.7 | 40.9 | 41.8 | 44.7 | 47.7 | 37.9 | 38.7 | 41.4 | 44.2 |
| | S/T | 0.93 | 0.87 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.56 | 1.00 | 0.96 | 0.78 | 0.58 | 1.00 | 0.99 | 0.81 | 0.61 | 1.00 | 0.99 | 0.81 | 0.61 | 1.00 | 1.00 | 0.82 | 0.61 |
| | Delta T | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 26 | 26 | 23 | 18 | 25 | 25 | 22 | 17 | 25 | 25 | 22 | 17 | 23 | 23 | 20 | 16 |
| KW | 3.31 | 3.37 | 3.47 | 3.57 | 3.54 | 3.61 | 3.72 | 3.83 | 3.75 | 3.82 | 3.94 | 4.06 | 3.93 | 4.01 | 4.13 | 4.26 | 4.08 | 4.17 | 4.30 | 4.43 | 4.22 | 4.31 | 4.43 | 4.56 | 4.22 | 4.31 | 4.44 | 4.58 | |
| AMPS | 16.1 | 16.3 | 16.7 | 17.2 | 17.0 | 17.3 | 17.7 | 18.2 | 18.1 | 18.4 | 18.9 | 19.5 | 19.1 | 19.4 | 19.9 | 20.5 | 20.0 | 20.4 | 20.9 | 21.6 | 20.9 | 21.4 | 21.6 | 22.2 | 20.9 | 21.4 | 21.9 | 22.6 | |
| Hi PR | 244 | 263 | 277 | 289 | 274 | 295 | 311 | 325 | 312 | 335 | 354 | 369 | 355 | 382 | 403 | 421 | 399 | 430 | 454 | 473 | 441 | 475 | 501 | 523 | 441 | 475 | 501 | 523 | |
| LO PR | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 153 | 128 | 136 | 149 | 159 | 135 | 143 | 156 | 167 | 141 | 150 | 164 | 175 | 146 | 155 | 169 | 180 | 146 | 155 | 169 | 180 | |
| MBh | 42.7 | 43.6 | 46.6 | 49.9 | 41.7 | 42.6 | 45.6 | 48.7 | 40.7 | 41.6 | 44.5 | 47.5 | 39.7 | 40.6 | 43.4 | 46.4 | 37.8 | 38.6 | 41.2 | 44.1 | 35.0 | 35.7 | 38.2 | 40.8 | 35.0 | 35.7 | 38.2 | 40.8 | |
| S/T | 0.90 | 0.84 | 0.69 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.90 | 0.73 | 0.54 | 0.99 | 0.92 | 0.75 | 0.56 | 1.02 | 0.96 | 0.78 | 0.58 | 1.03 | 0.97 | 0.79 | 0.59 | 1.03 | 0.97 | 0.79 | 0.59 | |
| Delta T | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 23 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 24 | 21 | 17 | |
| KW | 3.24 | 3.30 | 3.39 | 3.49 | 3.46 | 3.53 | 3.64 | 3.74 | 3.66 | 3.74 | 3.85 | 3.97 | 3.84 | 3.92 | 4.04 | 4.16 | 3.99 | 4.07 | 4.20 | 4.33 | 4.12 | 4.20 | 4.33 | 4.47 | 4.12 | 4.20 | 4.33 | 4.47 | |
| AMPS | 15.7 | 16.0 | 16.4 | 16.8 | 16.7 | 17.0 | 17.4 | 17.9 | 17.7 | 18.1 | 18.5 | 19.0 | 18.7 | 19.0 | 19.5 | 20.1 | 19.6 | 19.9 | 20.5 | 21.1 | 20.5 | 20.9 | 21.4 | 22.1 | 20.5 | 20.9 | 21.4 | 22.1 | |
| Hi PR | 237 | 255 | 269 | 281 | 266 | 286 | 302 | 315 | 302 | 325 | 343 | 358 | 344 | 370 | 391 | 408 | 387 | 417 | 440 | 459 | 428 | 460 | 486 | 507 | 428 | 460 | 486 | 507 | |
| LO PR | 113 | 120 | 131 | 140 | 120 | 127 | 139 | 148 | 124 | 132 | 144 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 169 | 142 | 151 | 164 | 175 | 142 | 151 | 164 | 175 | |
| 85 | MBh | 47.8 | 48.7 | 51.0 | 54.4 | 46.7 | 47.6 | 49.8 | 53.2 | 45.6 | 46.5 | 48.7 | 51.9 | 44.5 | 45.3 | 47.5 | 50.6 | 42.2 | 43.1 | 45.1 | 48.1 | 39.1 | 39.9 | 41.8 | 44.6 | 39.1 | 39.9 | 41.8 | 44.6 |
| | S/T | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.82 | 0.62 | 1.00 | 1.00 | 0.82 | 0.62 | 1.00 | 1.00 | 0.82 | 0.62 |
| | Delta T | 26 | 26 | 25 | 21 | 25 | 26 | 25 | 21 | 25 | 25 | 25 | 21 | 24 | 25 | 25 | 22 | 23 | 23 | 24 | 21 | 21 | 22 | 23 | 20 | 21 | 22 | 23 | 20 |
| | KW | 3.35 | 3.42 | 3.52 | 3.62 | 3.59 | 3.66 | 3.77 | 3.88 | 3.80 | 3.87 | 3.99 | 4.11 | 3.98 | 4.06 | 4.19 | 4.32 | 4.14 | 4.22 | 4.36 | 4.49 | 4.27 | 4.36 | 4.49 | 4.64 | 4.27 | 4.36 | 4.50 | 4.64 |
| | AMPS | 16.2 | 16.5 | 16.9 | 17.4 | 17.2 | 17.5 | 18.0 | 18.5 | 18.3 | 18.7 | 19.1 | 19.7 | 19.3 | 19.7 | 20.2 | 20.8 | 20.3 | 20.6 | 21.2 | 21.8 | 21.2 | 21.6 | 22.2 | 22.9 | 21.2 | 21.6 | 22.2 | 22.9 |
| | Hi PR | 248 | 267 | 282 | 294 | 279 | 300 | 317 | 330 | 317 | 341 | 360 | 376 | 361 | 388 | 410 | 428 | 406 | 437 | 461 | 481 | 449 | 483 | 510 | 532 | 449 | 483 | 510 | 532 |
| | LO PR | 119 | 126 | 138 | 147 | 125 | 133 | 146 | 155 | 130 | 139 | 151 | 161 | 137 | 146 | 159 | 169 | 143 | 153 | 167 | 177 | 148 | 158 | 172 | 184 | 148 | 158 | 172 | 184 |
| | MBh | 47.1 | 48.0 | 50.3 | 53.6 | 46.0 | 46.9 | 49.1 | 52.4 | 44.9 | 45.8 | 47.9 | 51.1 | 43.8 | 44.7 | 46.8 | 49.9 | 41.6 | 42.4 | 44.4 | 47.4 | 38.5 | 39.3 | 41.2 | 43.9 | 38.5 | 39.3 | 41.2 | 43.9 |
| | S/T | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.79 |
| | Delta T | 28 | 27 | 26 | 22 | 28 | 28 | 26 | 23 | 27 | 28 | 26 | 23 | 26 | 27 | 26 | 23 | 25 | 26 | 26 | 23 | 23 | 24 | 24 | 21 | 23 | 24 | 24 | 21 |
| KW | 3.33 | 3.40 | 3.50 | 3.60 | 3.57 | 3.64 | 3.75 | 3.86 | 3.78 | 3.85 | 3.97 | 4.09 | 3.96 | 4.04 | 4.17 | 4.30 | 4.12 | 4.20 | 4.33 | 4.47 | 4.25 | 4.34 | 4.47 | 4.62 | 4.25 | 4.34 | 4.47 | 4.62 | |
| AMPS | 16.2 | 16.5 | 16.8 | 17.3 | 17.1 | 17.4 | 17.9 | 18.4 | 18.2 | 18.6 | 19.0 | 19.6 | 19.2 | 19.6 | 20.1 | 20.7 | 20.2 | 20.5 | 21.1 | 21.7 | 21.1 | 21.5 | 22.1 | 22.8 | 21.1 | 21.5 | 22.1 | 22.8 | |
| Hi PR | 247 | 265 | 280 | 292 | 277 | 298 | 314 | 328 | 315 | 339 | 358 | 373 | 358 | 386 | 407 | 425 | 403 | 434 | 458 | 478 | 446 | 479 | 506 | 528 | 446 | 479 | 506 | 528 | |
| LO PR | 118 | 125 | 137 | 146 | 125 | 132 | 145 | 154 | 129 | 138 | 150 | 160 | 136 | 145 | 158 | 168 | 142 | 152 | 165 | 176 | 147 | 157 | 171 | 182 | 147 | 157 | 171 | 182 | |
| MBh | 43.5 | 44.3 | 46.4 | 49.5 | 42.5 | 43.3 | 45.3 | 48.4 | 41.4 | 42.2 | 44.2 | 47.2 | 40.4 | 41.2 | 43.2 | 46.0 | 38.4 | 39.2 | 41.0 | 43.7 | 35.6 | 36.3 | 38.0 | 40.5 | 35.6 | 36.3 | 38.0 | 40.5 | |
| S/T | 0.94 | 0.91 | 0.82 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.94 | 0.76 | |
| Delta T | 28 | 28 | 26 | 23 | 29 | 28 | 27 | 23 | 29 | 28 | 27 | 23 | 28 | 28 | 27 | 23 | 28 | 28 | 27 | 23 | 27 | 27 | 26 | 23 | 25 | 25 | 25 | 21 | |
| KW | 3.26 | 3.32 | 3.42 | 3.52 | 3.49 | 3.56 | 3.66 | 3.77 | 3.69 | 3.76 | 3.88 | 4.00 | 3.87 | 3.95 | 4.07 | 4.19 | 4.02 | 4.10 | 4.23 | 4.36 | 4.15 | 4.24 | 4.37 | 4.51 | 4.15 | 4.24 | 4.37 | 4.51 | |
| AMPS | 15.8 | 16.1 | 16.5 | 17.0 | 16.8 | 17.1 | 17.5 | 18.0 | 17.9 | 18.2 | 18.6 | 19.2 | 18.8 | 19.1 | 19.6 | 20.2 | 19.7 | 20.1 | 20.6 | 21.2 | 20.6 | 21.0 | 21.6 | 22.3 | 20.6 | 21.0 | 21.6 | 22.3 | |
| Hi PR | 239 | 257 | 272 | 284 | 268 | 289 | 305 | 318 | 305 | 329 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 445 | 464 | 432 | 465 | 491 | 512 | 432 | 465 | 491 | 512 | |
| LO PR | 114 | 122 | 133 | 141 | 121 | 129 | 140 | 149 | 126 | 134 | 146 | 155 | 132 | 140 | 153 | 163 | 138 | 147 | 161 | 171 | 143 | 152 | 166 | 177 | 143 | 152 | 166 | 177 | |

* NOTE: Shaded area reflects AHRI rating conditions
High and low pressures are measured at the liquid and suction access fittings.

KW = Total system power
AMPS: Unit amps (comp. + evaporator + condenser fan motors)

COOLING PERFORMANCE DATA

*PG1360***M41A*

Design Subcooling, 9 °F @ the liquid access fitting connection. ARI 95 test conditions. Design Superheat 8°F @ the compressor suction access fitting connection.

| IDB* | Airflow | 65 | | | | | | | | | | | | 75 | | | | | | | | | | | | 85 | | | | | | | | | | | | 95 | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|----|--|--|--|--------------------------------------|--|--|--|----|--|--|--|----|--|--|--|--------------------------------------|--|--|--|----|--|--|--|----|--|--|--|--------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | | | | | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | |
| 70 | 2035 | MBh | 56.3 | 58.4 | 64.0 | - | 55.0 | 57.0 | 62.5 | - | 0.79 | 0.66 | 0.46 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 0.84 | 0.70 | 0.49 | - | 20 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | S/T | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 4.26 | 4.35 | 4.48 | - | 4.57 | 4.66 | 4.80 | - | 4.84 | 4.94 | 5.09 | - | 5.08 | 5.18 | 5.34 | - | 5.28 | 5.39 | 5.56 | - | 5.28 | 5.39 | 5.56 | - | 5.28 | 5.39 | 5.56 | - | 5.45 | 5.57 | 5.75 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 18.0 | 18.4 | 18.9 | - | 19.2 | 19.6 | 20.2 | - | 20.7 | 21.1 | 21.7 | - | 21.9 | 22.3 | 23.0 | - | 23.1 | 23.6 | 24.3 | - | 23.1 | 23.6 | 24.3 | - | 23.1 | 23.6 | 24.3 | - | 24.3 | 24.9 | 25.6 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | HI PR | 241 | 260 | 274 | - | 271 | 291 | 308 | - | 308 | 331 | 350 | - | 351 | 377 | 399 | - | 395 | 425 | 448 | - | 395 | 425 | 448 | - | 395 | 425 | 448 | - | 436 | 469 | 495 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LO PR | 109 | 116 | 127 | - | 115 | 123 | 134 | - | 120 | 127 | 139 | - | 126 | 134 | 146 | - | 132 | 140 | 153 | - | 132 | 140 | 153 | - | 132 | 140 | 153 | - | 136 | 145 | 158 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1810 | MBh | 54.7 | 56.7 | 62.1 | - | 53.4 | 55.4 | 60.7 | - | 52.2 | 54.1 | 59.2 | - | 50.9 | 52.7 | 57.8 | - | 48.3 | 50.1 | 54.9 | - | 0.83 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | S/T | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 20 | 18 | 13 | - | 21 | 18 | 13 | - | 21 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 19 | 16 | 13 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 4.23 | 4.32 | 4.44 | - | 4.53 | 4.63 | 4.77 | - | 4.80 | 4.90 | 5.05 | - | 5.04 | 5.14 | 5.30 | - | 5.24 | 5.35 | 5.52 | - | 5.24 | 5.35 | 5.52 | - | 5.24 | 5.35 | 5.52 | - | 5.41 | 5.53 | 5.70 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 17.9 | 18.2 | 18.7 | - | 19.1 | 19.5 | 20.0 | - | 20.5 | 20.9 | 21.5 | - | 21.7 | 22.2 | 22.8 | - | 22.9 | 23.4 | 24.1 | - | 22.9 | 23.4 | 24.1 | - | 22.9 | 23.4 | 24.1 | - | 24.1 | 24.7 | 25.4 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HI PR | | 239 | 257 | 272 | - | 268 | 289 | 305 | - | 305 | 328 | 346 | - | 347 | 374 | 395 | - | 391 | 420 | 444 | - | 391 | 420 | 444 | - | 391 | 420 | 444 | - | 432 | 465 | 491 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LO PR | 108 | 115 | 125 | - | 114 | 121 | 132 | - | 119 | 126 | 138 | - | 125 | 132 | 145 | - | 131 | 139 | 152 | - | 131 | 139 | 152 | - | 131 | 139 | 152 | - | 135 | 144 | 157 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1590 | MBh | 50.5 | 52.3 | 57.3 | - | 49.3 | 51.1 | 56.0 | - | 48.1 | 49.9 | 54.7 | - | 47.0 | 48.7 | 53.3 | - | 44.6 | 46.2 | 50.7 | - | 0.80 | 0.67 | 0.46 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.80 | 0.67 | 0.46 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Delta T | 21 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 19 | 17 | 13 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | KW | 4.14 | 4.22 | 4.34 | - | 4.43 | 4.52 | 4.66 | - | 4.69 | 4.79 | 4.93 | - | 4.92 | 5.02 | 5.18 | - | 5.11 | 5.22 | 5.38 | - | 5.11 | 5.22 | 5.38 | - | 5.11 | 5.22 | 5.38 | - | 5.28 | 5.39 | 5.56 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | AMPS | 17.5 | 17.8 | 18.3 | - | 18.6 | 19.0 | 19.6 | - | 20.0 | 20.4 | 21.0 | - | 21.2 | 21.6 | 22.3 | - | 22.4 | 22.8 | 23.5 | - | 22.4 | 22.8 | 23.5 | - | 22.4 | 22.8 | 23.5 | - | 23.5 | 24.0 | 24.8 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HI PR | 232 | 249 | 263 | - | 260 | 280 | 296 | - | 296 | 318 | 336 | - | 337 | 363 | 383 | - | 379 | 408 | 431 | - | 379 | 408 | 431 | - | 379 | 408 | 431 | - | 419 | 451 | 476 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LO PR | 105 | 111 | 122 | - | 111 | 118 | 129 | - | 115 | 122 | 134 | - | 121 | 129 | 140 | - | 127 | 135 | 147 | - | 127 | 135 | 147 | - | 127 | 135 | 147 | - | 131 | 139 | 152 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 2035 | MBh | 57.3 | 59.0 | 63.9 | 68.5 | 56.0 | 57.6 | 62.4 | 66.9 | 54.6 | 56.3 | 60.9 | 65.3 | 53.3 | 54.9 | 59.4 | 63.8 | 50.6 | 52.1 | 56.4 | 60.6 | 46.9 | 48.3 | 52.3 | 56.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | S/T | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.92 | 0.83 | 0.63 | 0.40 | 0.95 | 0.85 | 0.65 | 0.42 | 0.99 | 0.89 | 0.67 | 0.43 | 1.00 | 0.89 | 0.68 | 0.43 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.22 | 5.39 | 5.56 | 5.32 | 5.43 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | HI PR | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 354 | 381 | 403 | 420 | 399 | 429 | 453 | 472 | 440 | 474 | 501 | 522 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LO PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 170 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1810 | MBh | 55.6 | 57.3 | 62.0 | 66.5 | 54.3 | 55.9 | 60.6 | 65.0 | 53.0 | 54.6 | 59.1 | 63.4 | 51.8 | 53.3 | 57.7 | 61.9 | 49.2 | 50.6 | 54.8 | 58.8 | 45.5 | 46.9 | 50.8 | 54.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 4.26 | 4.35 | 4.48 | 4.61 | 4.57 | 4.66 | 4.80 | 4.95 | 4.84 | 4.94 | 5.09 | 5.25 | 5.08 | 5.18 | 5.35 | 5.51 | 5.28 | 5.39 | 5.56 | 5.74 | 5.46 | 5.57 | 5.75 | 5.93 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 18.0 | 18.4 | 18.9 | 19.5 | 19.2 | 19.6 | 20.2 | 20.8 | 20.7 | 21.1 | 21.7 | 22.4 | 21.9 | 22.4 | 23.0 | 23.8 | 23.1 | 23.6 | 24.3 | 25.1 | 24.3 | 24.9 | 25.6 | 26.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HI PR | | 241 | 260 | 274 | 286 | 271 | 291 | 308 | 321 | 308 | 331 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 469 | 496 | 517 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LO PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 127 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 136 | 145 | 158 | 169 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1590 | MBh | 51.3 | 52.9 | 57.2 | 61.4 | 50.2 | 51.6 | 55.9 | 60.0 | 49.0 | 50.4 | 54.6 | 58.6 | 47.8 | 49.2 | 53.2 | 57.1 | 45.4 | 46.7 | 50.6 | 54.3 | 42.0 | 43.3 | 46.8 | 50.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | S/T | 0.80 | 0.72 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Delta T | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 21 | 17 | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | KW | 4.17 | 4.25 | 4.37 | 4.51 | 4.47 | 4.56 | 4.69 | 4.83 | 4.73 | 4.82 | 4.97 | 5.13 | 4.96 | 5.06 | 5.22 | 5.38 | 5.16 | 5.26 | 5.43 | 5.60 | 5.32 | 5.44 | 5.61 | 5.79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | AMPS | 17.6 | 17.9 | 18.4 | 19.0 | 18.8 | 19.2 | 19.7 | 20.3 | 20.2 | 20.6 | 21.2 | 21.9 | 21.4 | 21.8 | 22.4 | 23.2 | 22.6 | 23.0 | 23.7 | 24.5 | 23.7 | 24.2 | 25.0 | 25.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HI PR | 234 | 252 | 266 | 277 | 263 | 283 | 299 | 311 | 299 | 322 | 340 | 354 | 340 | 366 | 387 | 403 | 383 | 412 | 435 | 454 | 423 | 455 | 481 | 501 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LO PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 138 | 116 | 124 | 135 | 144 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 158 | 132 | 141 | 154 | 164 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 NOTE: Shaded area is ACCA (TVA) conditions
 KW = Total system power
 AMPS: Unit amps (comp. + evaporator + condenser fan motors)

COOLING PERFORMANCE DATA

PG1360M41A***

MODEL: *PG1360*M41A***

EXPANDED PERFORMANCE DATA

COOLING OPERATION

Design Subcooling, 9°F @ the liquid access fitting connect on ARI 95 test conditions. Design Superheat 8°F @ the compressor or suction access fitting connection.

| IDB* | Airflow | 65 | | | | | | | | | | | | 75 | | | | | | | | | | | | 85 | | | | | | | | | | | | 95 | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 2035 | MBh | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 |
| | | S/T | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Delta T | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 22 | 20 | 16 | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 22 | 20 | 16 | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 22 | 20 | 16 | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 22 | 20 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | KW | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | AMPS | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | H PR | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 368 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 368 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 368 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 368 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LO PR | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MBh | 56.6 | 57.9 | 61.8 | 66.1 | 55.3 | 56.5 | 60.4 | 64.5 | 54.0 | 55.2 | 58.9 | 63.0 | 52.7 | 53.8 | 57.5 | 61.5 | 50.0 | 51.1 | 54.6 | 58.4 | 46.3 | 47.4 | 50.6 | 54.1 | 56.6 | 57.9 | 61.8 | 66.1 | 55.3 | 56.5 | 60.4 | 64.5 | 54.0 | 55.2 | 58.9 | 63.0 | 52.7 | 53.8 | 57.5 | 61.5 | 50.0 | 51.1 | 54.6 | 58.4 | 46.3 | 47.4 | 50.6 | 54.1 | 56.6 | 57.9 | 61.8 | 66.1 | 55.3 | 56.5 | 60.4 | 64.5 | 54.0 | 55.2 | 58.9 | 63.0 | 52.7 | 53.8 | 57.5 | 61.5 | 50.0 | 51.1 | 54.6 | 58.4 | 46.3 | 47.4 | 50.6 | 54.1 | 56.6 | 57.9 | 61.8 | 66.1 | 55.3 | 56.5 | 60.4 | 64.5 | 54.0 | 55.2 | 58.9 | 63.0 | 52.7 | 53.8 | 57.5 | 61.5 | 50.0 | 51.1 | 54.6 | 58.4 | 46.3 | 47.4 | 50.6 | 54.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Delta T | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 25 | 22 | 18 | 24 | 24 | 20 | 16 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 25 | 22 | 18 | 24 | 24 | 20 | 16 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 25 | 22 | 18 | 24 | 24 | 20 | 16 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 25 | 22 | 18 | 24 | 24 | 20 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | KW | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.23 | 5.39 | 5.56 | 5.32 | 5.44 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.23 | 5.39 | 5.56 | 5.32 | 5.44 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.23 | 5.39 | 5.56 | 5.32 | 5.44 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.23 | 5.39 | 5.56 | 5.32 | 5.44 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | AMPS | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H PR | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 364 | 381 | 403 | 420 | 399 | 429 | 453 | 473 | 440 | 474 | 501 | 522 | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 364 | 381 | 403 | 420 | 399 | 429 | 453 | 473 | 440 | 474 | 501 | 522 | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 364 | 381 | 403 | 420 | 399 | 429 | 453 | 473 | 440 | 474 | 501 | 522 | 244 | 262 | 277 | 289 | 274 | 294 | 311 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COOLING PERFORMANCE DATA

PERFORMANCE TEST

All data based upon listed indoor dry bulb temperature. .00 inches external static pressure on coil of outdoor section. Indoor air cubic feet per minute (CFM) as listed in the Performance Data Sheets:

If conditions vary from this, results will change as follows:

1. As indoor dry bulb temperatures increase, a slight increase will occur in indoor air temperature drop (**Delta T**). Low and high side pressures and power will not change.
2. As indoor CFM decreases, a slight increase will occur in indoor temperature drop (**Delta T**). A slight decrease will occur in low and high side pressures and power.

A properly operating unit should be within plus or minus **3 degrees** of the typical (**Delta T**) value shown.

A properly operating unit should be within plus or minus **7 PSIG** of the **HI PR** shown.

A properly operating unit should be within plus or minus **3 PSIG** of the **LO PR** shown.

A properly operating unit should be within plus or minus **3 Amps** of the typical value shown.

WIRING DIAGRAMS


[A/G]PG13[24,30,42]***M41A*
[A/G]PG1336***(A/C)*



WARNING

HIGH VOLTAGE!
DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



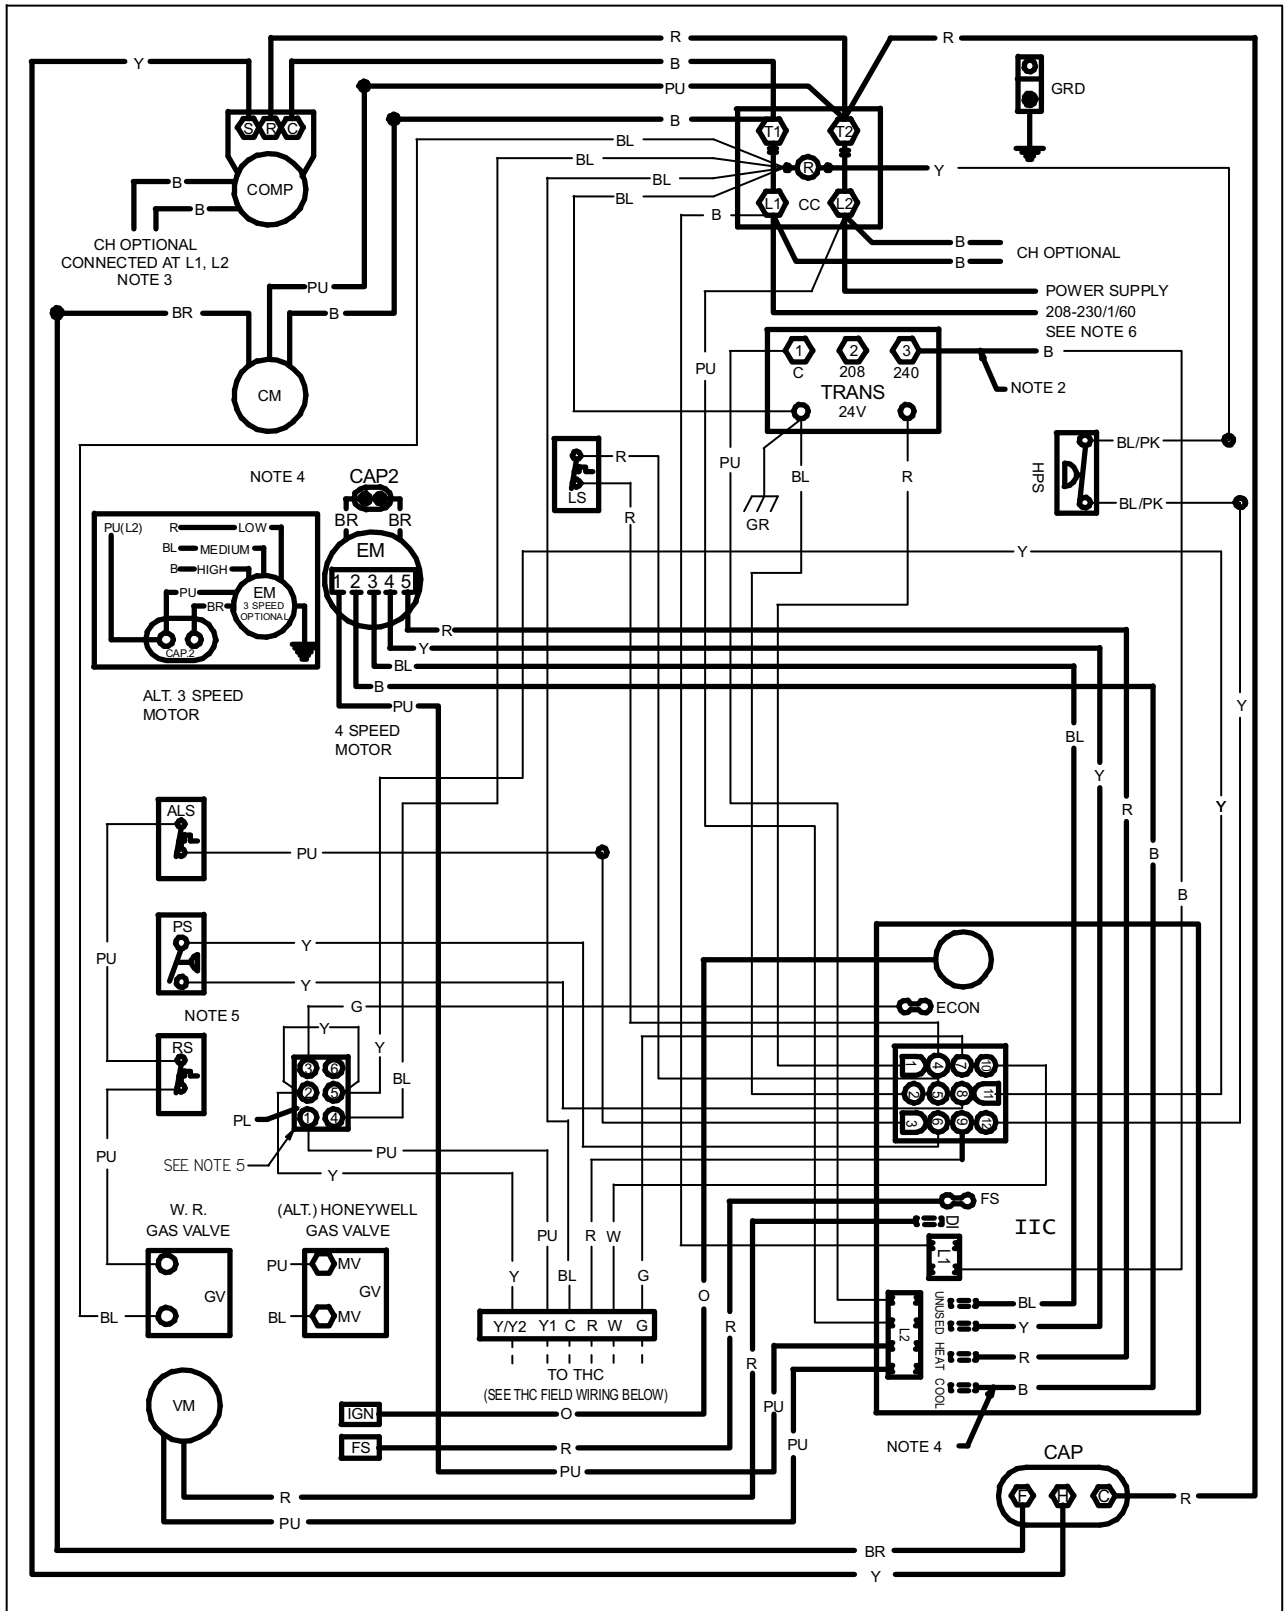

0140G01233 REV. A


Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS

[A/G]PG13[24,30,42]***M41A*
[A/G]PG1336***(A/C)*

WARNING

HIGH VOLTAGE!
DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

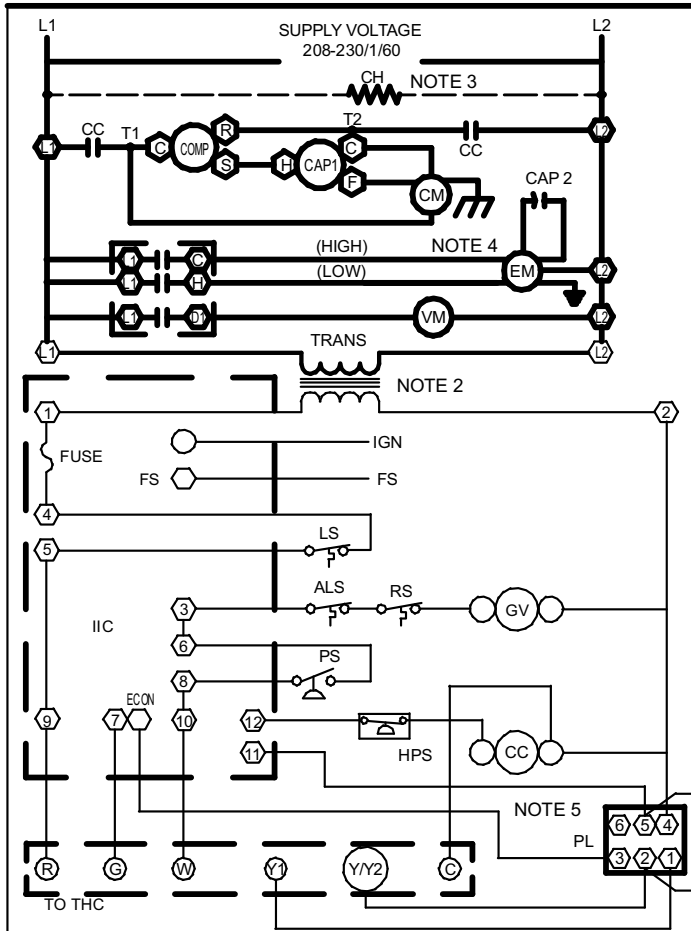

COMPONENT LEGEND

| | | |
|---------------------------------|---------------------------|--|
| ALS AUXILIARY LIMIT SWITCH | ● WIRE SPLICE | |
| CAP CAPACITOR | ⊗ MARKED TERMINAL | |
| COMP COMPRESSOR | ○ UNMARKED TERMINAL | |
| CM CONDENSER MOTOR | <u>WIRING</u> | |
| CC CONTACTOR | — LINE VOLTAGE | |
| CH CRANKCASE HEATER | — LOW VOLTAGE | |
| EM EVAPORATOR MOTOR | — FIELD INSTALLED POWER | |
| FS FLAME SENSOR | — FIELD INSTALLED CONTROL | |
| GV GAS VALVE | <u>WIRE CODE</u> | |
| IIC INTEGRATED IGNITION CONTROL | B BLACK | |
| IGN IGNITOR | BL BLUE | |
| LS LIMIT SWITCH | BR BROWN | |
| PL PLUG | G GREEN | |
| PS PRESSURE SWITCH | O ORANGE | |
| RS ROLLOUT SWITCH | PK PINK | |
| THC THERMOSTAT HEAT & COOL | PU PURPLE | |
| TRANS TRANSFORMER | R RED | |
| VM VENT MOTOR | W WHITE | |
| HPS HIGH PRESSURE SWITCH | Y YELLOW | |
| | BL/PK BLUE/PINK | |

NOTES

- REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL.(USE COPPER CONDUCTOR ONLY).
- FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL ④ TO TERMINAL ② ON TRANSFORMER.
- CRANKCASE HEATER (OPTIONAL).
- FOR DIFFERENT THAN FACTORY SPEED TAP. CHANGE COOLING SPEED AT COOL TERMINAL (IIC). CHANGE HEATING SPEED AT HEAT TERMINAL (IIC)


| | |
|------------------------|----------------------|
| <u>4 SPEED MOTOR</u> | <u>3 SPEED MOTOR</u> |
| B - HIGH SPEED | B - HIGH SPEED |
| BL - MEDIUM HIGH SPEED | BL - MEDIUM SPEED |
| Y - MEDIUM LOW SPEED | R - LOW SPEED |
| R - LOW SPEED | |

208-230/1/60

INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|--|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

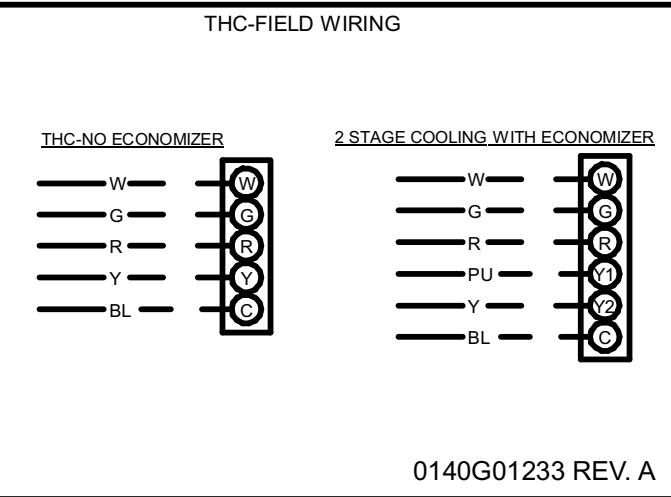

WIRING DIAGRAMS


[A/G]PG13[48-60]***M41A*



WARNING

HIGH VOLTAGE!
 DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



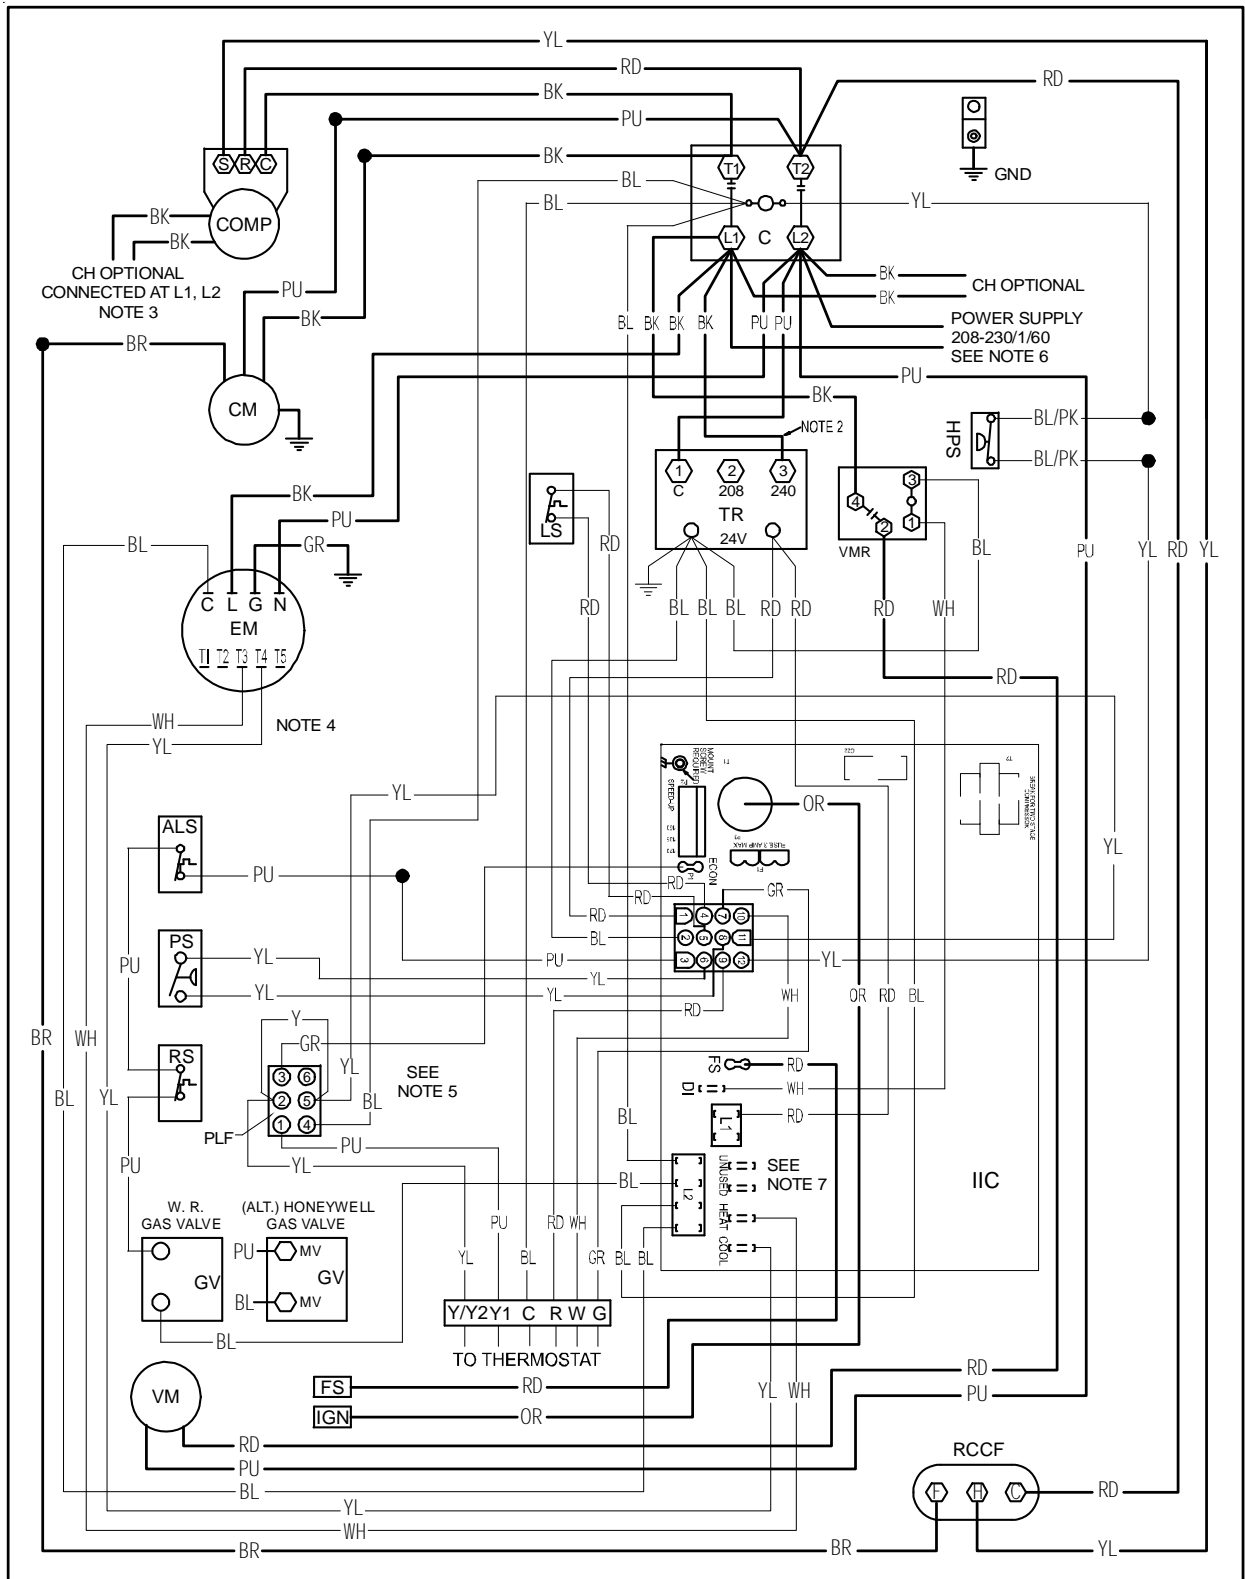


0140G01234 REV A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.



WARNING

HIGH VOLTAGE!
DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

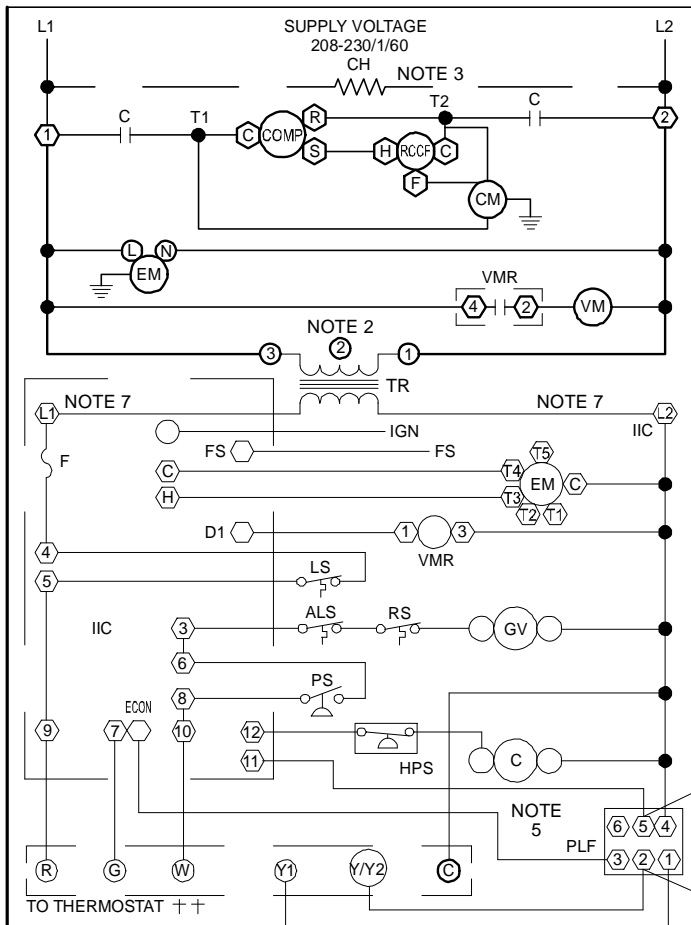

COMPONENT LEGEND

- ALS AUXILIARY LIMIT SWITCH
- COMP COMPRESSOR
- CM CONDENSER MOTOR
- C CONTACTOR
- CH CRANKCASE HEATER
- EM EVAPORATOR MOTOR
- F FUSE
- FS FLAME SENSOR
- GND EQUIPMENT GROUND
- GV GAS VALVE
- IIC INTEGRATED IGNITION CONTROL
- IGN IGNITOR
- LS LIMIT SWITCH
- PLF FEMALE PLUG/CONNECTOR
- PS PRESSURE SWITCH
- RCCF RUN CAPACITOR FOR COMPRESSOR/FAN
- RS ROLLOUT SWITCH
- TR TRANSFORMER
- VM VENT MOTOR
- VMR VENT MOTOR RELAY
- HPS HIGH PRESSURE SWITCH

FACTORY WIRING

- LINE VOLTAGE
- LOW VOLTAGE
- OPTIONAL HIGH VOLTAGE

FIELD WIRING

- HIGH VOLTAGE
- - - - - LOW VOLTAGE

WIRE CODE

- BK BLACK
- BL BLUE
- BR BROWN
- GR GREEN
- OR ORANGE
- PK PINK
- PU PURPLE
- RD RED
- WH WHITE
- YL YELLOW
- BL/PK BLUE/PINK

NOTES

1. REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL. (USE COPPER CONDUCTOR ONLY).
2. FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL (3) TO TERMINAL (2) ON TRANSFORMER.
3. CRANKCASE HEATER NOT SUPPLIED ON ALL UNITS.
4. FOR DIFFERENT THAN FACTORY SPEED TAP. CHANGE COOLING SPEED AT MOTOR T4 AND T5 TERMINALS. CHANGE HEATING SPEED AT MOTOR T1, T2 AND T3 TERMINALS.

COOLING SPEED (YELLOW WIRE)

- T4 - LOW SPEED
- T5 - HIGH SPEED

HEATING SPEED (WHITE WIRE)

- T1 - LOW SPEED
- T2 - MED. SPEED
- T3 - HIGH SPEED

5. ACCESSORY ECONOMIZER PLUG ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.
6. USE COOPER CONDUCTORS ONLY.
 ++ USE NEC CLASS 2 WIRE.

208-230/1/60


INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:


| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|---|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

THERMOSTAT FIELD WIRING ++

NO ECONOMIZER



2 STAGE COOLING WITH ECONOMIZER



0140G01234 REV A

PRODUCT DESIGN

*PG 13 SEER R-410A Single Phase 5 mm Package Gas Units

APG1324045M41(B/C)*

GPG1324045M41(C/D)*

APG1324070M41(B/C)*

GPG1324070M41(C/D)*

A/GPG1330045M41C*

A/GPG1330070M41C*

A/GPG1336045M41D*

A/GPG1336070M41(B/D)*

A/GPG1336090M41(B/D)*

A/GPG1342070M41(B/C)*

A/GPG1342090M41(B/C)*

A/GPG1348070M41(B/C/D)*

A/GPG1348090M41(B/C/D)*

A/GPG1348115M41(B/C/D)*

A/GPG1360090M41(B/C/D)*

A/GPG1360115M41(B/C/D)*

A/GPG1360140M41(B/C/D)*

*PG13 Package Gas Units are designed for outdoor installations only in either residential or light commercial applications and are available in 2 through 5 ton sizes. They are designed for 208/230 volt single phase applications. (**PG13 3, 4 and 5 ton models are also available for 230V 3 phase applications. See Technical Manual RT6312005*.*)

The connecting ductwork (Supply and Return) can be connected for either horizontal or vertical airflow. In the vertical application, a matching Roof Curb is recommended.

A return air filter must be installed behind the return air grille(s) or provision must be made for a filter in an accessible location within the return air duct. The minimum filter area should not be less than those sizes listed in the Specification Section. Under no circumstances should the unit be operated without return air filters.

A 3/4" pipe is provided for removal of condensate water from the indoor coil. (Do not reduce the drain line size).

NOTE: Tighten drain to a maximum torque of 10 in-lbs

Refrigerant flow control is achieved by use of restrictor orifices. *PG13 units use the FasTest Access Fitting System which consists of a saddle that is either soldered to the suction and liquid lines or is fastened with a locking nut to the access fitting box (core) and then screwed into the saddle.

NOTE: The core must not be removed from the saddle until the refrigerant charge has been removed. Failure to do so could result in property damage or personal injury.

The single phase units use permanent split capacitors (PSC) design compressors. Starting components are therefore not required. A low MFD run capacitor assists the compressor to start and remains in the circuit during operation.

The outdoor fan and indoor blower motors are single phase permanent split capacitor type motors. *PG1348***M41** and

*PG1360***M41** models are equipped with X-13 indoor blower motors. X-13 motors are constant torque motors with very low power consumption and are energized by a 24V signal from the ignition control. The X-13 features an integrated control module.

Air for condensing (cooling cycle) is drawn through the outdoor coil by a propeller fan, and is discharged vertically out the top of the unit. The outdoor coil is designed for .0 static. No additional restriction (ductwork) shall be applied.

Conditioned air is drawn through the filter(s), field installed, across the coil and back into the conditioned space by the indoor blower.


Some models of the *PG13 series package units use the Compliant Scroll compressor, there are a number of design characteristics which are different from the traditional reciprocating compressor.

- Due to their design Scroll compressors are inherently more tolerant of liquid refrigerant. **NOTE:** Even though the compressor section of a Scroll compressor is more tolerant of liquid refrigerant, continued floodback or flooded start conditions may wash oil from the bearing surfaces causing premature bearing failure.
- These Scroll compressors use white oil which is compatible with 3GS. 3GS oil may be used if additional oil is required.
- Compliant scroll compressors perform "quiet" shutdowns that allow the compressor to restart immediately without the need for a time delay. This compressor will restart even if the system has not equalized.
- Operating pressures and amp draws may differ from standard reciprocating compressors. This information may be found in the "Cooling Performance Data" section.

PRODUCT DESIGN


Location and Clearances

NOTE: To ensure proper condensate drainage, unit must be installed in a level position.



Outside Slab Installation

NOTE: Roof overhang should be no more than 36" and provision made to deflect the warm discharge air out from the overhang. Minimum clearances are required to avoid air recirculation and keep the unit operating at peak efficiency.



Rooftop Installation

NOTE: To ensure proper condensate drainage, unit must be installed in a level position.

WARNING

TO PREVENT POSSIBLE PROPERTY DAMAGE, THE UNIT SHOULD REMAIN IN AN UPRIGHT POSITION DURING ALL RIGGING AND MOVING OPERATIONS. TO FACILITATE LIFTING AND MOVING IF A CRANE IS USED, PLACE THE UNIT IN AN ADEQUATE CABLE SLING.

IMPORTANT: If using bottom discharge with roof curb, ductwork should be attached to the curb prior to installing the unit.

Refer to Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual.

PACKAGE GAS SPECIFICATIONS

PG13[36-48]M41B***

Models with 5mm Coils

| | | *PG1336070M41 B* | *PG1336090M41 B* | *PG1342070M41 B* | *PG1342090M41 B* | *PG1348070M41 B* |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 35,000 | 35,000 | 40,500 | 40,500 | 46,000 |
| | SEER / EER | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 | 69,000 | 92,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 | 55,000 | 73,600 | 55,000 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 | 35 - 65 | 45 - 75 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 21.2 | 21.2 | 22.3 | 22.3 | 27.1 |
| | MINIMUM CIRCUIT AMPACITY | 25.4 | 25.4 | 26.8 | 26.8 | 32.1 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 | 40 | 40 | 50 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 | 3 | 4 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 16.7 | 16.7 | 17.9 | 17.9 | 19.9 |
| | LOCKED ROTOR AMPS | 79.0 | 79.0 | 112.0 | 112.0 | 109.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 8.77 | 8.77 | 11.3 | 11.3 | 8.77 |
| | NUMBER OF ROWS | 2 | 2 | 2 | 2 | 2 |
| | FINS PER INCH | 27 | 27 | 27 | 27 | 27 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 3/4 - 5 |
| | FULL LOAD AMPS | 3.06 | 3.06 | 3.06 | 3.06 | 5.8 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 | 4.1 | 4.1 | - |
| | MOTOR SPEED TAP - COOLING | High | High | Medium | Medium | T4 |
| | RPM | 910 | 910 | 910 | 910 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 9" | 10" x 9" | 10" x 10" | 10" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1200 | 1200 | 1300 | 1300 | 1520 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL (ALUMINUM) | FACE AREA - SQ. FT. | 4.33 | 4.33 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. (2) | 4.2 | 4.2 | 4.7 | 4.7 | 5.1 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.068) | Orifice (.068) | Orifice (.072) | Orifice (.072) | Orifice (.076) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 70 | 70 | 81 | 81 | 87 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 475 | 480 | 515 | 520 | 540 |
| | OPERATING WEIGHT LBS. | 453 | 458 | 493 | 496 | 518 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

PG13[48-60]M41B***

Models with 5mm Coils

| | | *PG1348090M41 B* | *PG1348115M41 B* | *PG1360090M41 B* | *PG1360115M41 B* | *PG1360140M41 B* |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 46,000 | 46,000 | 57,000 | 57,000 | 57,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 92,000 | 115,000 | 92,000 | 115,000 | 138,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 73,600 | 92,000 | 73,600 | 92,000 | 110,400 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 45 - 75 | 45-75 | 45 - 75 | 45 - 75 | 45 - 75 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 27.1 | 27.1 | 35.4 | 35.4 | 35.4 |
| | MINIMUM CIRCUIT AMPACITY | 32.1 | 32.1 | 42.0 | 42.0 | 42.0 |
| | MAXIMUM OVERCURRENT PROTECTION | 50 | 50 | 60 | 60 | 60 |
| HEATING SECTION | NUMBER OF BURNERS | 4 | 5 | 4 | 5 | 6 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 19.9 | 19.9 | 26.4 | 26.4 | 26.4 |
| | LOCKED ROTOR AMPS | 109.0 | 109.0 | 134.0 | 134.0 | 134.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 1100 | 1100 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 3500 | 3500 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 8.77 | 8.77 | 11.3 | 11.3 | 11.3 |
| | NUMBER OF ROWS | 2 | 2 | 2 | 2 | 2 |
| | FINS PER INCH | 27 | 27 | 27 | 27 | 27 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 3/4 - 5 | 3/4 - 5 | 1 - 5 | 1 - 5 | 1 - 5 |
| | FULL LOAD AMPS | 5.8 | 5.8 | 7.6 | 7.6 | 7.6 |
| | LOCKED ROTOR AMPS | - | - | - | - | - |
| | MOTOR SPEED TAP - COOLING | T4 | T4 | T4 | T4 | T4 |
| | RPM | 1050 | 1050 | 1050 | 1050 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1550 | 1550 | 1750 | 1750 | 1750 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL (ALUMINUM) | FACE AREA - SQ. FT. | 5.67 | 5.67 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 5.1 | 5.1 | 6.3 | 6.3 | 6.3 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.076) | Orifice (.076) | Orifice (.086) | Orifice (.086) | Orifice (.086) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 87 | 87 | 91 | 91 | 91 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 545 | 550 | 555 | 560 | 565 |
| | OPERATING WEIGHT LBS. | 523 | 528 | 533 | 538 | 543 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

GPG1324***M41D*

Models with 5mm Coils

| | | GPG1324045M41 DA | GPG1324070M41 DA |
|--------------------------------------|---|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 23,600 | 23,600 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 |
| | AFUE (%) | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 10.3 | 10.3 |
| | MINIMUM CIRCUIT AMPACITY | 12.2 | 12.2 |
| | MAXIMUM OVERCURRENT PROTECTION ⁽³⁾ | 15 | 15 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 |
| COMPRESSOR | TYPE | Recip | Recip |
| | RATED LOAD AMPS | 7.7 | 7.7 |
| | LOCKED ROTOR AMPS | 37.0 | 37.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/6 | 1/6 |
| | RPM | 815 | 815 |
| | FULL LOAD AMPS | 1.1 | 1.1 |
| | LOCKED ROTOR AMPS | 1.7 | 1.7 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 |
| | CFM | 2400 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 12.3 | 12.3 |
| | NUMBER OF ROWS | 1 | 1 |
| | FINS PER INCH | 24 | 24 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/4 - 3 | 1/4 - 3 |
| | FULL LOAD AMPS | 1.5 | 1.5 |
| | LOCKED ROTOR AMPS | 2.2 | 2.2 |
| | MOTOR SPEED TAP - COOLING | Med | Med |
| | RPM | 952 | 952 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 8" | 10" x 8" |
| | RATED SCFM COOLING | 800 | 800 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 |
| | NUMBER OF ROWS | 3 | 3 |
| | FINS PER INCH | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 2.7 | 2.7 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.057) | Orifice (.057) |
| | REFRIGERANT CHARGE R-410A (Oz) | 75 | 75 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 435 | 439 |
| | OPERATING WEIGHT LBS. | 412 | 417 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG13[24-30]***M41C*

*PG1336***M41D*

Models with 5mm Coils

| | | *PG1324045M41 C* | *PG1324070M41 C* | *PG1330045M41 C* | *PG1330070M41 C* | *PG1336045M41 D* |
|--------------------------------------|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 23,600 | 23,600 | 28,600 | 28,600 | 35,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 46,000 | 69,000 | 46,000 | 69,000 | 46,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 36,700 | 55,000 | 36,700 | 55,000 | 36,700 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 30 - 60 | 35 - 65 | 30 - 60 | 35 - 65 | 30 - 60 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 16.1 | 16.1 | 17.5 | 17.5 | 21.2 |
| | MINIMUM CIRCUIT AMPACITY | 19.5 | 19.5 | 20.9 | 20.9 | 25.4 |
| | MAXIMUM OVERCURRENT PROTECTION ⁽³⁾ | 30 | 30 | 35 | 35 | 40 |
| HEATING SECTION | NUMBER OF BURNERS | 2 | 3 | 2 | 3 | 2 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 13.5 | 13.5 | 14.1 | 14.1 | 16.7 |
| | LOCKED ROTOR AMPS | 58.3 | 58.3 | 73.0 | 73.0 | 79.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/6 | 1/6 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 830 |
| | FULL LOAD AMPS | 1.1 | 1.1 | 1.4 | 1.4 | 1.5 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 3.0 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 2700 | 2700 | 2400 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 6.94 | 6.94 | 12.31 | 12.31 | 8.77 |
| | NUMBER OF ROWS | 2 | 2 | 1 | 1 | 2 |
| | FINS PER INCH | 27 | 27 | 24 | 24 | 27 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/4 - 3 | 1/4 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.9 | 1.9 | 3.1 |
| | LOCKED ROTOR AMPS | 2.2 | 2.2 | 3.1 | 3.1 | 4.1 |
| | MOTOR SPEED TAP - COOLING | Med | Med | Med | Med | High |
| | RPM | 952 | 952 | 1,015 | 1,015 | 910 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 8" | 10" x 9" |
| | RATED SCFM COOLING | 800 | 800 | 1000 | 1000 | 1200 |
| | MAX EXTERNAL STATIC PRESS (*w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 4.33 | 4.33 | 4.33 |
| | NUMBER OF ROWS | 3 | 3 | 4 | 4 | 4 |
| | FINS PER INCH | 16 | 16 | 16 | 16 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 2.7 | 2.7 | 3.3 | 3.3 | 4.2 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.057) | Orifice (.057) | Orifice (.062) | Orifice (.062) | Orifice (.068) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 68 | 68 | 78 | 78 | 70 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 420 | 425 | 421 | 425 | 470 |
| | OPERATING WEIGHT LBS. | 396 | 397 | 397 | 399 | 449 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG1336***M41D*

*PG13[42-48]***M41C*/D*

Models with 5mm Coils

| | | *PG1336070M41 D* | *PG1336090M41 D* | *PG1342070M41 C* | *PG1342090M41 C* | *PG1348070M41 C*/D* |
|--------------------------------------|---------------------------------------|---------------------|---------------------|---------------------|---------------------|------------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 35,000 | 35,000 | 40,500 | 40,500 | 46,000 |
| | SEER / EER | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 11.0 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 69,000 | 92,000 | 69,000 | 92,000 | 69,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 55,000 | 73,600 | 55,000 | 73,600 | 55,000 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 35 - 65 | 45 - 75 | 35 - 65 | 45 - 75 | 35 - 65 |
| UNIT ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 21.2 | 21.2 | 22.3 | 22.3 | 27.1 |
| | MINIMUM CIRCUIT AMPACITY | 25.4 | 25.4 | 26.8 | 26.8 | 32.1 |
| | MAXIMUM OVERCURRENT PROTECTION | 40 | 40 | 40 | 40 | 50 |
| HEATING SECTION | NUMBER OF BURNERS | 3 | 4 | 3 | 4 | 3 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 16.7 | 16.7 | 17.9 | 17.9 | 19.9 |
| | LOCKED ROTOR AMPS | 79.0 | 79.0 | 112.0 | 112.0 | 109.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 830 | 830 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.5 | 1.5 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 2400 | 2400 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 8.77 | 8.77 | 11.3 | 11.3 | 8.77 |
| | NUMBER OF ROWS | 2 | 2 | 2 | 2 | 2 |
| | FINS PER INCH | 27 | 27 | 27 | 27 | 27 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 1/3 - 3 | 3/4 - 5 |
| | FULL LOAD AMPS | 3.06 | 3.06 | 3.06 | 3.06 | 5.8 |
| | LOCKED ROTOR AMPS | 4.1 | 4.1 | 4.1 | 4.1 | - |
| | MOTOR SPEED TAP - COOLING | High | High | Medium | Medium | T4 |
| | RPM | 910 | 910 | 910 | 910 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 10" x 9" | 10" x 9" | 10" x 10" | 10" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1200 | 1200 | 1300 | 1300 | 1520 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 4.33 | 4.33 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. ⁽²⁾ | 4.2 | 4.2 | 4.7 | 4.7 | 5.1 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.068) | Orifice (.068) | Orifice (.072) | Orifice (.072) | Orifice (.076) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 70 | 70 | 81 | 81 | 87 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 475 | 480 | 515 | 520 | 540 |
| | OPERATING WEIGHT LBS. | 453 | 458 | 493 | 496 | 518 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

PACKAGE GAS SPECIFICATIONS

*PG13[48-60]***M41C*/D*

Models with 5mm Coils

| | | *PG1348090M41 C*/D* | *PG1348115M41 C*/D* | *PG1360090M41 C*/D* | *PG1360115M41 C*/D* | *PG1360140M41 C*/D* |
|-------------------------------|---------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| COOLING CAPACITY | COOLING CAPACITY, BTUH | 46,000 | 46,000 | 57,000 | 57,000 | 57,000 |
| | SEER / EER | 13.0 / 11.0 | 13.0 / 11.0 | 13.0 / 10.75 | 13.0 / 10.75 | 13.0 / 10.75 |
| HEATING CAPACITY | HEATING INPUT BTUH (U.S. & CANADIAN) | 92,000 | 115,000 | 92,000 | 115,000 | 138,000 |
| | HEATING OUTPUT BTUH (U.S. & CANADIAN) | 73,600 | 92,000 | 73,600 | 92,000 | 110,400 |
| | AFUE (%) | 80 | 80 | 80 | 80 | 80 |
| | TEMPERATURE RISE (°F) | 45 - 75 | 45-75 | 45 - 75 | 45 - 75 | 45 - 75 |
| ELECTRICAL SPECIFICATION | VOLTAGE (NAMEPLATE) | 208/230 | 208/230 | 208/230 | 208/230 | 208/230 |
| | UNIT AMPS (TOTAL) | 27.1 | 27.1 | 35.4 | 35.4 | 35.4 |
| | MINIMUM CIRCUIT AMPACITY | 32.1 | 32.1 | 42.0 | 42.0 | 42.0 |
| | MAXIMUM OVERCURRENT PROTECTION | 50 | 50 | 60 | 60 | 60 |
| HEATING SECTION | NUMBER OF BURNERS | 4 | 5 | 4 | 5 | 6 |
| | ORIFICE SIZE NATURAL | 43 | 43 | 43 | 43 | 43 |
| | ORIFICE SIZE LP | 55 | 55 | 55 | 55 | 55 |
| COMPRESSOR | TYPE | Scroll | Scroll | Scroll | Scroll | Scroll |
| | RATED LOAD AMPS | 19.9 | 19.9 | 26.4 | 26.4 | 26.4 |
| | LOCKED ROTOR AMPS | 109.0 | 109.0 | 134.0 | 134.0 | 134.0 |
| CONDENSER FAN MOTOR | HORSEPOWER | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | RPM | 1100 | 1100 | 1100 | 1100 | 1100 |
| | FULL LOAD AMPS | 1.4 | 1.4 | 1.4 | 1.4 | 1.4 |
| | LOCKED ROTOR AMPS | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
| CONDENSER FAN | BLADE DIAMETER (INCHES) | 22 | 22 | 22 | 22 | 22 |
| | NUMBER OF BLADES | 3 | 3 | 3 | 3 | 3 |
| | CFM | 3500 | 3500 | 3500 | 3500 | 3500 |
| CONDENSER COIL | FACE AREA - SQ. FT. | 8.77 | 8.77 | 11.3 | 11.3 | 11.3 |
| | NUMBER OF ROWS | 2 | 2 | 2 | 2 | 2 |
| | FINS PER INCH | 27 | 27 | 27 | 27 | 27 |
| EVAPORATOR BLOWER MOTOR | HORSEPOWER - NO. OF SPEEDS | 3/4 - 5 | 3/4 - 5 | 1 - 5 | 1 - 5 | 1 - 5 |
| | FULL LOAD AMPS | 5.8 | 5.8 | 7.6 | 7.6 | 7.6 |
| | LOCKED ROTOR AMPS | - | - | - | - | - |
| | MOTOR SPEED TAP - COOLING | T4 | T4 | T4 | T4 | T4 |
| | RPM | 1050 | 1050 | 1050 | 1050 | 1050 |
| EVAPORATOR BLOWER | DIAMETER X WIDTH (INCHES) | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" | 11" x 10" |
| | RATED SCFM COOLING | 1550 | 1550 | 1750 | 1750 | 1750 |
| | MAX EXTERNAL STATIC PRESS ("w.c.) | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| EVAPORATOR COIL | FACE AREA - SQ. FT. | 5.67 | 5.67 | 5.67 | 5.67 | 5.67 |
| | NUMBER OF ROWS | 4 | 4 | 4 | 4 | 4 |
| | FINS PER INCH | 14 | 14 | 14 | 14 | 14 |
| | FILTER SIZE - SQ. FT. (2) | 5.1 | 5.1 | 6.3 | 6.3 | 6.3 |
| | DRAIN SIZE (INCHES) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| HEATING LIMITS | PRIMARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | AUXILIARY LIMIT SETTING (°F) | 150 | 150 | 150 | 150 | 150 |
| | ROLLOUT LIMIT SETTING (°F) | 350* | 350* | 350* | 350* | 350* |
| GENERAL INFORMATION | PISTON EXPANSION DEVICE | Orifice (.076) | Orifice (.076) | Orifice (.087) | Orifice (.087) | Orifice (.087) |
| | REFRIGERANT CHARGE R-410A (Oz.) | 87 | 87 | 91 | 91 | 91 |
| | POWER SUPPLY ENTRANCE SIZE (INCHES) | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1 1/8 |
| | LOW VOLTAGE ENTRANCE SIZE (INCHES) | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| | SHIPPING WEIGHT LBS. | 545 | 550 | 555 | 560 | 565 |
| | OPERATING WEIGHT LBS. | 523 | 528 | 533 | 538 | 543 |

(1) Units installed in Canada are certified only to 4500 feet.

(2) Calculated external filter size based on air velocity of 300 ft/min. and applies to disposable filters **only**.

(3) Maximum Overcurrent Protection Device: **MUST** use Time Delay Fuse or HACR type Circuit Breaker of the same size as noted.

IMPORTANT: While this data is presented as a guide, it is important to electrically connect the unit and properly size wires and fuses/circuit breakers in accordance with the National Electrical Code and/or all local codes.

BLOWER PERFORMANCE DATA

| *PG1324045M41** - Rise Range: 30° - 60° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|-------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 600 | 150 | 0.67 | 57 | 850 | 230 | 1.02 | 40 | 1,190 | 380 | 1.67 | NR |
| 0.2 | 570 | 140 | 0.65 | 60 | 830 | 220 | 1.00 | 41 | 1,140 | 360 | 1.62 | NR |
| 0.3 | 510 | 130 | 0.63 | NR | 765 | 215 | 0.97 | 45 | 1,080 | 350 | 1.58 | 32 |
| 0.4 | 450 | 125 | 0.61 | NR | 715 | 210 | 0.94 | 48 | 1,025 | 340 | 1.54 | 33 |
| 0.5 | 380 | 120 | 0.58 | NR | 660 | 205 | 0.90 | 52 | 975 | 330 | 1.38 | 35 |
| 0.6 | ----- | ----- | ----- | NR | 610 | 195 | 0.88 | 56 | 920 | 310 | 1.37 | 37 |
| 0.7 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 830 | 300 | 1.35 | 41 |
| 0.8 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 730 | 290 | 1.32 | 47 |

| *PG1324070M41** - Rise Range: 35° - 65° | | | | | | | | | | | | |
|---|-------|-------|-------|------|--------|-------|-------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 600 | 150 | 0.67 | NR | 850 | 230 | 1.02 | NR | 1,190 | 380 | 1.67 | 43 |
| 0.2 | 570 | 140 | 0.65 | NR | 830 | 220 | 1.00 | NR | 1,140 | 360 | 1.62 | 45 |
| 0.3 | 510 | 130 | 0.63 | NR | 765 | 215 | 0.97 | NR | 1,080 | 350 | 1.58 | 47 |
| 0.4 | 450 | 125 | 0.61 | NR | 715 | 210 | 0.94 | NR | 1,025 | 340 | 1.54 | 50 |
| 0.5 | 380 | 120 | 0.58 | NR | 660 | 205 | 0.90 | NR | 975 | 330 | 1.38 | 52 |
| 0.6 | ----- | ----- | ----- | NR | 610 | 195 | 0.88 | NR | 920 | 310 | 1.37 | 56 |
| 0.7 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 830 | 300 | 1.35 | 62 |
| 0.8 | ----- | ----- | ----- | NR | ----- | ----- | ----- | NR | 730 | 290 | 1.32 | NR |

| *PG1330045M41** - Rise Range: 30° - 60° | | | | | | | | | | | | |
|---|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,056 | 350 | 1.51 | 33 | 1,261 | 452 | 1.95 | NR | 1,370 | 509 | 2.23 | NR |
| 0.2 | 1,010 | 339 | 1.43 | 34 | 1,221 | 442 | 1.90 | NR | 1,310 | 492 | 2.13 | NR |
| 0.3 | 971 | 343 | 1.45 | 36 | 1,174 | 428 | 1.84 | NR | 1,262 | 489 | 2.09 | NR |
| 0.4 | 937 | 329 | 1.41 | 37 | 1,125 | 414 | 1.80 | 31 | 1,208 | 475 | 2.06 | NR |
| 0.5 | 878 | 318 | 1.27 | 39 | 1,063 | 398 | 1.70 | 32 | 1,140 | 453 | 1.93 | 30 |
| 0.6 | 811 | 306 | 1.29 | 43 | 1,004 | 380 | 1.66 | 34 | 1,081 | 440 | 1.90 | 32 |
| 0.7 | 723 | 291 | 1.21 | 48 | 919 | 368 | 1.59 | 38 | 1,006 | 425 | 1.88 | 34 |
| 0.8 | 545 | 259 | 1.10 | NR | 796 | 371 | 1.46 | 43 | 879 | 403 | 1.74 | 39 |

| *PG133070M41** - Rise Range: 35° - 65° | | | | | | | | | | | | |
|--|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,056 | 350 | 1.51 | 49 | 1,261 | 452 | 1.95 | 41 | 1,370 | 509 | 2.23 | 38 |
| 0.2 | 1,010 | 339 | 1.43 | 51 | 1,221 | 442 | 1.90 | 42 | 1,310 | 492 | 2.13 | 40 |
| 0.3 | 971 | 343 | 1.45 | 53 | 1,174 | 428 | 1.84 | 44 | 1,262 | 489 | 2.09 | 41 |
| 0.4 | 937 | 329 | 1.41 | 55 | 1,125 | 414 | 1.80 | 46 | 1,208 | 475 | 2.06 | 43 |
| 0.5 | 878 | 318 | 1.27 | 59 | 1,063 | 398 | 1.70 | 49 | 1,140 | 453 | 1.93 | 45 |
| 0.6 | 811 | 306 | 1.29 | 64 | 1,004 | 380 | 1.66 | 52 | 1,081 | 440 | 1.90 | 48 |
| 0.7 | 723 | 291 | 1.21 | NR | 919 | 368 | 1.59 | 56 | 1,006 | 425 | 1.88 | NR |
| 0.8 | 545 | 259 | 1.10 | NR | 796 | 371 | 1.46 | 65 | 879 | 403 | 1.74 | NR |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1336M41(B/D)***
PG1342M41(B/C)***

***PG1336045M41** - Rise Range: 30 -60°**

| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
|-------------|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 34 | 1,337 | 471 | 2.08 | NR | 1,462 | 596 | 2.64 | NR |
| 0.2 | 982 | 334 | 1.46 | 35 | 1,265 | 452 | 2.01 | NR | 1,398 | 563 | 2.58 | NR |
| 0.3 | 946 | 329 | 1.40 | 36 | 1,227 | 448 | 1.97 | NR | 1,326 | 550 | 2.50 | NR |
| 0.4 | 888 | 313 | 1.38 | 39 | 1,159 | 429 | 1.87 | 30 | 1,260 | 534 | 2.42 | NR |
| 0.5 | 823 | 304 | 1.29 | 42 | 1,073 | 405 | 1.73 | 32 | 1,188 | 513 | 2.34 | NR |
| 0.6 | 750 | 287 | 1.23 | 46 | 1,008 | 393 | 1.71 | 34 | 1,090 | 496 | 2.22 | 32 |
| 0.7 | 668 | 271 | 1.16 | 52 | 895 | 371 | 1.61 | 39 | 997 | 478 | 2.18 | 35 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 45 | 852 | 454 | 2.12 | 40 |

***PG1336070M41** - Rise Range: 35° -65°**

| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
|-------------|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 50 | 1,337 | 471 | 2.08 | 39 | 1,462 | 596 | 2.64 | 35 |
| 0.2 | 982 | 334 | 1.46 | 53 | 1,265 | 452 | 2.01 | 41 | 1,398 | 563 | 2.58 | 37 |
| 0.3 | 946 | 329 | 1.40 | 55 | 1,227 | 448 | 1.97 | 42 | 1,326 | 550 | 2.50 | 39 |
| 0.4 | 888 | 313 | 1.38 | 58 | 1,159 | 429 | 1.87 | 45 | 1,260 | 534 | 2.42 | 41 |
| 0.5 | 823 | 304 | 1.29 | 63 | 1,073 | 405 | 1.73 | 48 | 1,188 | 513 | 2.34 | 44 |
| 0.6 | 750 | 287 | 1.23 | NR | 1,008 | 393 | 1.71 | 51 | 1,090 | 496 | 2.22 | 47 |
| 0.7 | 668 | 271 | 1.16 | NR | 895 | 371 | 1.61 | 58 | 997 | 478 | 2.18 | 52 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 68 | 852 | 454 | 2.12 | 61 |

***PG1336090M41** - Rise Range: 45° -75°**

| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
|-------------|-------|-------|------|------|--------|-------|------|------|-------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,029 | 346 | 1.51 | 50 | 1,337 | 471 | 2.08 | NR | 1,462 | 596 | 2.64 | NR |
| 0.2 | 982 | 334 | 1.46 | 53 | 1,265 | 452 | 2.01 | NR | 1,398 | 563 | 2.58 | NR |
| 0.3 | 946 | 329 | 1.40 | 55 | 1,227 | 448 | 1.97 | NR | 1,326 | 550 | 2.50 | NR |
| 0.4 | 888 | 313 | 1.38 | 58 | 1,159 | 429 | 1.87 | 45 | 1,260 | 534 | 2.42 | NR |
| 0.5 | 823 | 304 | 1.29 | 63 | 1,073 | 405 | 1.73 | 48 | 1,188 | 513 | 2.34 | NR |
| 0.6 | 750 | 287 | 1.23 | 69 | 1,008 | 393 | 1.71 | 51 | 1,090 | 496 | 2.22 | 47 |
| 0.7 | 668 | 271 | 1.16 | NR | 895 | 371 | 1.61 | 58 | 997 | 478 | 2.18 | 52 |
| 0.8 | 454 | 238 | 1.00 | NR | 760 | 346 | 1.49 | 68 | 852 | 454 | 2.12 | 61 |

***PG1342070M41** - Rise Range: 35° - 65°**

| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
|-------------|-------|-------|-------|------|--------|-------|------|------|-------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,100 | 340 | 1.55 | 46 | 1,450 | 480 | 2.15 | 35 | 1,575 | 585 | 2.64 | NR |
| 0.2 | 1,040 | 325 | 1.49 | 49 | 1,390 | 460 | 2.06 | 37 | 1,515 | 565 | 2.58 | NR |
| 0.3 | 1,000 | 320 | 1.44 | 51 | 1,300 | 445 | 1.98 | 39 | 1,430 | 550 | 2.50 | 36 |
| 0.4 | 925 | 305 | 1.38 | 55 | 1,215 | 425 | 1.89 | 42 | 1,340 | 525 | 2.42 | 38 |
| 0.5 | 860 | 290 | 1.32 | 59 | 1,115 | 395 | 1.79 | 46 | 1,240 | 505 | 2.34 | 41 |
| 0.6 | 800 | 275 | 1.22 | 64 | 1,030 | 375 | 1.71 | 50 | 1,130 | 465 | 2.22 | 45 |
| 0.7 | 690 | 255 | 1.16 | NR | 945 | 350 | 1.60 | 54 | 1,010 | 450 | 2.18 | 51 |
| 0.8 | ----- | ----- | ----- | NR | 860 | 335 | 1.54 | 59 | 910 | 430 | 2.12 | 56 |

***PG1342090M41** - Rise Range: 45° - 75°**

| Unit Static | LOW | | | | MEDIUM | | | | HIGH | | | |
|-------------|-------|-------|-------|------|--------|-------|------|------|-------|-------|------|------|
| | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE | CFM | WATTS | AMPS | RISE |
| 0.1 | 1,100 | 340 | 1.55 | 62 | 1,450 | 480 | 2.15 | 47 | 1,575 | 585 | 2.64 | NR |
| 0.2 | 1,040 | 325 | 1.49 | 66 | 1,390 | 460 | 2.06 | 49 | 1,515 | 565 | 2.58 | 45 |
| 0.3 | 1,000 | 320 | 1.44 | 68 | 1,300 | 445 | 1.98 | 52 | 1,430 | 550 | 2.50 | 48 |
| 0.4 | 925 | 305 | 1.38 | 74 | 1,215 | 425 | 1.89 | 56 | 1,340 | 525 | 2.42 | 51 |
| 0.5 | 860 | 290 | 1.32 | NR | 1,115 | 395 | 1.79 | 61 | 1,240 | 505 | 2.34 | 55 |
| 0.6 | 800 | 275 | 1.22 | NR | 1,030 | 375 | 1.71 | 66 | 1,130 | 465 | 2.22 | 60 |
| 0.7 | 690 | 255 | 1.16 | NR | 945 | 350 | 1.60 | 72 | 1,010 | 450 | 2.18 | 67 |
| 0.8 | ----- | ----- | ----- | NR | 860 | 335 | 1.54 | NR | 910 | 430 | 2.12 | 75 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1348M41(B/C/D)***

| *PG1348070M41B/C* - Rise Range: 35° - 65° | | | | | | | | | |
|---|------------------|-------|-------|------------------|-------|-------|------------------|-------|-------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | 56 | 1,105 | 186 | 46 | 1,397 | 323 | NR |
| 0.3 | 822 | 134 | 62 | 1,024 | 193 | 50 | 1,346 | 331 | NR |
| 0.4 | 733 | 140 | 69 | 967 | 202 | 53 | 1,288 | 342 | NR |
| 0.5 | 664 | 150 | NR | 884 | 214 | 58 | 1,273 | 352 | NR |
| 0.6 | 606 | 154 | NR | 816 | 220 | 62 | 1,178 | 359 | NR |
| 0.7 | 584 | 162 | NR | 769 | 230 | 66 | 1,120 | 369 | 45 |
| 0.8 | 551 | 164 | NR | 698 | 236 | 73 | 1,057 | 381 | 48 |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 1,669 | 532 |
| 0.3 | 1,545 | 463 | 1,654 | 239 |
| 0.4 | 1,506 | 476 | 1,610 | 551 |
| 0.5 | 1,448 | 481 | 1,545 | 557 |
| 0.6 | 1,400 | 493 | 1,512 | 566 |
| 0.7 | 1,341 | 502 | 1,433 | 578 |
| 0.8 | 1289 | 511 | 1,392 | 591 |

| *PG1348090M41B/C* - Rise Range: 45° - 75° | | | | | | | | | |
|---|------------------|-------|-------|------------------|-------|-------|------------------|-------|-------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | 75 | 1,105 | 186 | 62 | 1,397 | 323 | 49 |
| 0.3 | 822 | 134 | NR | 1,024 | 193 | 67 | 1,346 | 331 | 51 |
| 0.4 | 733 | 140 | NR | 967 | 202 | 71 | 1,288 | 342 | 53 |
| 0.5 | 664 | 150 | NR | 884 | 214 | NR | 1,273 | 352 | 54 |
| 0.6 | 606 | 154 | NR | 816 | 220 | NR | 1,178 | 359 | 58 |
| 0.7 | 584 | 162 | NR | 769 | 230 | NR | 1,120 | 369 | 61 |
| 0.8 | 551 | 164 | NR | 698 | 236 | NR | 1,057 | 381 | 65 |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 1,669 | 532 |
| 0.3 | 1,545 | 463 | 1,654 | 239 |
| 0.4 | 1,506 | 476 | 1,610 | 551 |
| 0.5 | 1,448 | 481 | 1,545 | 557 |
| 0.6 | 1,400 | 493 | 1,512 | 566 |
| 0.7 | 1,341 | 502 | 1,433 | 578 |
| 0.8 | 1289 | 511 | 1,392 | 591 |

| *PG13480115M41B/C* - Rise Range: 45° - 75° | | | | | | | | | |
|--|------------------|-------|-------|------------------|-------|-------|------------------|-------|-------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| 0.2 | 914 | 125 | NR | 1,105 | 186 | 77 | 1,397 | 323 | 61 |
| 0.3 | 822 | 134 | NR | 1,024 | 193 | NR | 1,346 | 331 | 63 |
| 0.4 | 733 | 140 | NR | 967 | 202 | NR | 1,288 | 342 | 66 |
| 0.5 | 664 | 150 | NR | 884 | 214 | NR | 1,273 | 352 | 67 |
| 0.6 | 606 | 154 | NR | 816 | 220 | NR | 1,178 | 359 | 72 |
| 0.7 | 584 | 162 | NR | 769 | 230 | NR | 1,120 | 369 | NR |
| 0.8 | 551 | 164 | NR | 698 | 236 | NR | 1,057 | 381 | NR |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | ----- | ----- | ----- | ----- |
| 0.2 | 1,593 | 449 | 1,669 | 532 |
| 0.3 | 1,545 | 463 | 1,654 | 239 |
| 0.4 | 1,506 | 476 | 1,610 | 551 |
| 0.5 | 1,448 | 481 | 1,545 | 557 |
| 0.6 | 1,400 | 493 | 1,512 | 566 |
| 0.7 | 1,341 | 502 | 1,433 | 578 |
| 0.8 | 1289 | 511 | 1,392 | 591 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1360M41(B/C/D)***

| *PG136090M41B/C* - Rise Range: 45° - 75° | | | | | | | | | |
|--|------------------|-------|------|------------------|-------|------|------------------|-------|------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | 1,125 | 162 | 61 | 1466 | 315 | 47 | 1780 | 496 | NR |
| 0.2 | 1,049 | 168 | 65 | 1,384 | 322 | 50 | 1,730 | 506 | NR |
| 0.3 | 1,000 | 178 | 69 | 1,347 | 329 | 51 | 1,664 | 520 | NR |
| 0.4 | 910 | 184 | 75 | 1,291 | 341 | 53 | 1,608 | 526 | NR |
| 0.5 | 857 | 197 | NR | 1,237 | 350 | 55 | 1,568 | 532 | NR |
| 0.6 | 809 | 201 | NR | 1,185 | 362 | 58 | 1,515 | 546 | 45 |
| 0.7 | 739 | 207 | NR | 1,134 | 369 | 60 | 1,477 | 552 | 46 |
| 0.8 | 703 | 218 | NR | 1,087 | 382 | 63 | 1,422 | 562 | 48 |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | 1,942 | 649 | 2067 | 792 |
| 0.2 | 1,883 | 657 | 2,030 | 811 |
| 0.3 | 1,859 | 670 | 1,982 | 814 |
| 0.4 | 1,827 | 675 | 1,909 | 808 |
| 0.5 | 1,749 | 683 | 1,842 | 798 |
| 0.6 | 1,706 | 693 | 1,789 | 772 |
| 0.7 | 1,655 | 703 | 1,703 | 763 |
| 0.8 | 1,588 | 705 | 1,618 | 732 |

| *PG1360115M41B/C* - Rise Range: 45° - 75° | | | | | | | | | |
|---|------------------|-------|------|------------------|-------|------|------------------|-------|------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | 1125 | 162 | NR | 1466 | 315 | 58 | 1780 | 496 | 48 |
| 0.2 | 1,049 | 168 | NR | 1,384 | 322 | 62 | 1,730 | 506 | 49 |
| 0.3 | 1,000 | 178 | NR | 1,347 | 329 | 63 | 1,664 | 520 | 51 |
| 0.4 | 910 | 184 | NR | 1,291 | 341 | 66 | 1,608 | 526 | 53 |
| 0.5 | 857 | 197 | NR | 1,237 | 350 | 69 | 1,568 | 532 | 54 |
| 0.6 | 809 | 201 | NR | 1,185 | 362 | 72 | 1,515 | 546 | 56 |
| 0.7 | 739 | 207 | NR | 1,134 | 369 | NR | 1,477 | 552 | 58 |
| 0.8 | 703 | 218 | NR | 1,087 | 382 | NR | 1,422 | 562 | 60 |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | 1942 | 649 | 2067 | 792 |
| 0.2 | 1,883 | 657 | 2,030 | 811 |
| 0.3 | 1,859 | 670 | 1,982 | 814 |
| 0.4 | 1,827 | 675 | 1,909 | 808 |
| 0.5 | 1,749 | 683 | 1,842 | 798 |
| 0.6 | 1,706 | 693 | 1,789 | 772 |
| 0.7 | 1,655 | 703 | 1,703 | 763 |
| 0.8 | 1588 | 705 | 1,618 | 732 |

| *PG1360140M41B/C* - Rise Range: 45° - 75° | | | | | | | | | |
|---|------------------|-------|------|------------------|-------|------|------------------|-------|------|
| Unit | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | |
| Static | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE |
| 0.1 | 1125 | 162 | NR | 1466 | 315 | 71 | 1780 | 496 | 59 |
| 0.2 | 1,049 | 168 | NR | 1,384 | 322 | NR | 1,730 | 506 | 60 |
| 0.3 | 1,000 | 178 | NR | 1,347 | 329 | NR | 1,664 | 520 | 63 |
| 0.4 | 910 | 184 | NR | 1,291 | 341 | NR | 1,608 | 526 | 65 |
| 0.5 | 857 | 197 | NR | 1,237 | 350 | NR | 1,568 | 532 | 67 |
| 0.6 | 809 | 201 | NR | 1,185 | 362 | NR | 1,515 | 546 | 69 |
| 0.7 | 739 | 207 | NR | 1,134 | 369 | NR | 1,477 | 552 | 71 |
| 0.8 | 703 | 218 | NR | 1,087 | 382 | NR | 1,422 | 562 | 74 |

| Unit | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|------------------|-------|------------------|-------|
| Static | CFM | WATTS | CFM | WATTS |
| 0.1 | 1942 | 649 | 2067 | 792 |
| 0.2 | 1,883 | 657 | 2,030 | 811 |
| 0.3 | 1,859 | 670 | 1,982 | 814 |
| 0.4 | 1,827 | 675 | 1,909 | 808 |
| 0.5 | 1,749 | 683 | 1,842 | 798 |
| 0.6 | 1,706 | 693 | 1,789 | 772 |
| 0.7 | 1,655 | 703 | 1,703 | 763 |
| 0.8 | 1588 | 705 | 1,618 | 732 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1348M41(B/C/D)***

| *PG1348070M41D* - Rise Range: 35° - 65° F | | | | | | | | | | | | | |
|---|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 0.2 | 892 | 104 | 56 | 1088 | 183 | 46 | 1401 | 310 | NR | 1624 | 400 | 1704 | 433 |
| 0.3 | 824 | 112 | 62 | 1024 | 191 | 50 | 1345 | 318 | NR | 1573 | 408 | 1655 | 440 |
| 0.4 | 756 | 120 | 69 | 960 | 199 | 53 | 1289 | 326 | NR | 1522 | 416 | 1606 | 448 |
| 0.5 | 687 | 128 | NR | 897 | 207 | 58 | 1233 | 333 | NR | 1472 | 424 | 1558 | 456 |
| 0.6 | 619 | 135 | NR | 833 | 214 | 62 | 1176 | 341 | NR | 1421 | 431 | 1509 | 464 |
| 0.7 | 551 | 143 | NR | 770 | 222 | 66 | 1120 | 349 | 45 | 1370 | 439 | 1460 | 472 |
| 0.8 | 482 | 151 | NR | 706 | 230 | 73 | 1064 | 357 | 48 | 1319 | 447 | 1411 | 480 |

| *PG1348090M41D* - Rise Range: 45° - 75° F | | | | | | | | | | | | | |
|---|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 0.2 | 892 | 104 | 75 | 1088 | 183 | 62 | 1401 | 310 | 49 | 1624 | 400 | 1704 | 433 |
| 0.3 | 824 | 112 | NR | 1024 | 191 | 67 | 1345 | 318 | 51 | 1573 | 408 | 1655 | 440 |
| 0.4 | 756 | 120 | NR | 960 | 199 | 71 | 1289 | 326 | 53 | 1522 | 416 | 1606 | 448 |
| 0.5 | 687 | 128 | NR | 897 | 207 | NR | 1233 | 333 | 54 | 1472 | 424 | 1558 | 456 |
| 0.6 | 619 | 135 | NR | 833 | 214 | NR | 1176 | 341 | 58 | 1421 | 431 | 1509 | 464 |
| 0.7 | 551 | 143 | NR | 770 | 222 | NR | 1120 | 349 | 61 | 1370 | 439 | 1460 | 472 |
| 0.8 | 482 | 151 | NR | 706 | 230 | NR | 1064 | 357 | 65 | 1319 | 447 | 1411 | 480 |

| *PG1348115M41D* - Rise Range: 45° - 75° F | | | | | | | | | | | | | |
|---|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 0.2 | 892 | 104 | NR | 1088 | 183 | 77 | 1401 | 310 | 61 | 1624 | 400 | 1704 | 433 |
| 0.3 | 824 | 112 | NR | 1024 | 191 | NR | 1345 | 318 | 63 | 1573 | 408 | 1655 | 440 |
| 0.4 | 756 | 120 | NR | 960 | 199 | NR | 1289 | 326 | 66 | 1522 | 416 | 1606 | 448 |
| 0.5 | 687 | 128 | NR | 897 | 207 | NR | 1233 | 333 | 67 | 1472 | 424 | 1558 | 456 |
| 0.6 | 619 | 135 | NR | 833 | 214 | NR | 1176 | 341 | 72 | 1421 | 431 | 1509 | 464 |
| 0.7 | 551 | 143 | NR | 770 | 222 | NR | 1120 | 349 | NR | 1370 | 439 | 1460 | 472 |
| 0.8 | 482 | 151 | NR | 706 | 230 | NR | 1064 | 357 | NR | 1319 | 447 | 1411 | 480 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

BLOWER PERFORMANCE DATA

PG1360M41(B/C/D)***

***PG1360090M41D* - Rise Range: 45° - 75° F**

| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 1100 | 97 | 61 | 1445 | 305 | 47 | 1762 | 496 | NR | 1878 | 566 | 2080 | 688 |
| 0.2 | 1050 | 105 | 65 | 1396 | 313 | 50 | 1713 | 504 | NR | 1829 | 574 | 2031 | 696 |
| 0.3 | 1001 | 113 | 69 | 1346 | 321 | 51 | 1664 | 512 | NR | 1780 | 582 | 1982 | 704 |
| 0.4 | 952 | 121 | 75 | 1297 | 329 | 53 | 1615 | 521 | NR | 1730 | 590 | 1932 | 712 |
| 0.5 | 903 | 129 | NR | 1248 | 337 | 55 | 1566 | 529 | NR | 1681 | 598 | 1883 | 720 |
| 0.6 | 854 | 137 | NR | 1199 | 345 | 58 | 1516 | 537 | 45 | 1632 | 607 | 1834 | 728 |
| 0.7 | 804 | 145 | NR | 1149 | 353 | 60 | 1467 | 545 | 46 | 1583 | 615 | 1785 | 736 |
| 0.8 | 755 | 153 | NR | 1100 | 361 | 63 | 1418 | 553 | 48 | 1534 | 623 | 1736 | 745 |

***PG1360115M41D* - Rise Range: 45° - 75° F**

| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 1100 | 97 | NR | 1445 | 305 | 58 | 1762 | 496 | 48 | 1878 | 566 | 2080 | 688 |
| 0.2 | 1050 | 105 | NR | 1396 | 313 | 62 | 1713 | 504 | 49 | 1829 | 574 | 2031 | 696 |
| 0.3 | 1001 | 113 | NR | 1346 | 321 | 63 | 1664 | 512 | 51 | 1780 | 582 | 1982 | 704 |
| 0.4 | 952 | 121 | NR | 1297 | 329 | 66 | 1615 | 521 | 53 | 1730 | 590 | 1932 | 712 |
| 0.5 | 903 | 129 | NR | 1248 | 337 | 69 | 1566 | 529 | 54 | 1681 | 598 | 1883 | 720 |
| 0.6 | 854 | 137 | NR | 1199 | 345 | 72 | 1516 | 537 | 56 | 1632 | 607 | 1834 | 728 |
| 0.7 | 804 | 145 | NR | 1149 | 353 | NR | 1467 | 545 | 58 | 1583 | 615 | 1785 | 736 |
| 0.8 | 755 | 153 | NR | 1100 | 361 | NR | 1418 | 553 | 60 | 1534 | 623 | 1736 | 745 |

***PG1360140M41D* - Rise Range: 45° - 75° F**

| E.S.P | T1 HEATING SPEED | | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING | | T5 COOLING | |
|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------|------------|-------|------------|-------|
| | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 1100 | 97 | NR | 1445 | 305 | 71 | 1762 | 496 | 59 | 1878 | 566 | 2080 | 688 |
| 0.2 | 1050 | 105 | NR | 1396 | 313 | NR | 1713 | 504 | 60 | 1829 | 574 | 2031 | 696 |
| 0.3 | 1001 | 113 | NR | 1346 | 321 | NR | 1664 | 512 | 63 | 1780 | 582 | 1982 | 704 |
| 0.4 | 952 | 121 | NR | 1297 | 329 | NR | 1615 | 521 | 65 | 1730 | 590 | 1932 | 712 |
| 0.5 | 903 | 129 | NR | 1248 | 337 | NR | 1566 | 529 | 67 | 1681 | 598 | 1883 | 720 |
| 0.6 | 854 | 137 | NR | 1199 | 345 | NR | 1516 | 537 | 69 | 1632 | 607 | 1834 | 728 |
| 0.7 | 804 | 145 | NR | 1149 | 353 | NR | 1467 | 545 | 71 | 1583 | 615 | 1785 | 736 |
| 0.8 | 755 | 153 | NR | 1100 | 361 | NR | 1418 | 553 | 74 | 1534 | 623 | 1736 | 745 |

NR = Heating Temperature Rise Not Recommended.

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.5" w.c.

COOLING PERFORMANCE DATA 5mm Coils

APG1324*M41(B/C)***
GPG1324*M41(B/C/D)***
PG1330M41 (B/C/D)***

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1324***M41B*

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| 70 | MBh | 23.5 | 24.4 | 26.7 | - | 23.0 | 23.8 | 26.1 | - | 22.4 | 23.2 | 25.5 | - | 21.9 | 22.7 | 24.8 | - | 20.8 | 21.5 | 23.6 | - | 20.8 | 21.5 | 23.6 | - | 19.3 | 20.0 | 21.9 | - |
| | ST | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.86 | 0.72 | 0.50 | - | 0.90 | 0.75 | 0.52 | - | 0.90 | 0.75 | 0.52 | - | 0.90 | 0.75 | 0.52 | - |
| | Delta T | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - |
| | KW | 1.69 | 1.73 | 1.78 | - | 1.82 | 1.86 | 1.91 | - | 1.93 | 1.97 | 2.03 | - | 2.03 | 2.07 | 2.14 | - | 2.11 | 2.16 | 2.22 | - | 2.11 | 2.16 | 2.22 | - | 2.18 | 2.23 | 2.30 | - |
| | AMPS | 6.7 | 6.8 | 7.0 | - | 7.1 | 7.3 | 7.5 | - | 7.7 | 7.9 | 8.1 | - | 8.2 | 8.4 | 8.6 | - | 8.7 | 8.9 | 9.1 | - | 8.7 | 8.9 | 9.1 | - | 9.2 | 9.4 | 9.7 | - |
| | HI PR | 243 | 262 | 276 | - | 273 | 294 | 310 | - | 310 | 334 | 353 | - | 353 | 380 | 402 | - | 398 | 428 | 452 | - | 398 | 428 | 452 | - | 439 | 473 | 499 | - |
| | LO PR | 112 | 119 | 130 | - | 119 | 126 | 138 | - | 123 | 131 | 143 | - | 129 | 138 | 150 | - | 136 | 144 | 158 | - | 136 | 144 | 158 | - | 140 | 149 | 163 | - |
| | MBh | 22.8 | 23.7 | 25.9 | - | 22.3 | 23.1 | 25.3 | - | 21.8 | 22.6 | 24.7 | - | 21.2 | 22.0 | 24.1 | - | 20.2 | 20.9 | 22.9 | - | 20.2 | 20.9 | 22.9 | - | 18.7 | 19.4 | 21.2 | - |
| | ST | 0.75 | 0.63 | 0.43 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.85 | 0.71 | 0.49 | - | 0.85 | 0.71 | 0.49 | - | 0.86 | 0.72 | 0.50 | - |
| | Delta T | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 16 | 12 | - |
| | KW | 1.68 | 1.71 | 1.77 | - | 1.80 | 1.84 | 1.90 | - | 1.91 | 1.95 | 2.02 | - | 2.01 | 2.05 | 2.12 | - | 2.09 | 2.14 | 2.21 | - | 2.09 | 2.14 | 2.21 | - | 2.16 | 2.21 | 2.28 | - |
| | AMPS | 6.6 | 6.7 | 6.9 | - | 7.1 | 7.2 | 7.5 | - | 7.6 | 7.8 | 8.0 | - | 8.1 | 8.3 | 8.6 | - | 8.6 | 8.8 | 9.1 | - | 8.6 | 8.8 | 9.1 | - | 9.1 | 9.3 | 9.6 | - |
| HI PR | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 307 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 447 | - | 394 | 424 | 447 | - | 435 | 468 | 494 | - | |
| LO PR | 111 | 118 | 129 | - | 117 | 125 | 136 | - | 122 | 130 | 142 | - | 128 | 136 | 149 | - | 134 | 143 | 156 | - | 134 | 143 | 156 | - | 139 | 148 | 161 | - | |
| MBh | 21.1 | 21.8 | 23.9 | - | 20.6 | 21.3 | 23.4 | - | 20.1 | 20.8 | 22.8 | - | 19.6 | 20.3 | 22.3 | - | 18.6 | 19.3 | 21.1 | - | 18.6 | 19.3 | 21.1 | - | 17.3 | 17.9 | 19.6 | - | |
| ST | 0.72 | 0.60 | 0.42 | - | 0.75 | 0.63 | 0.43 | - | 0.77 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.82 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - | |
| Delta T | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 19 | 17 | 13 | - | |
| KW | 1.64 | 1.67 | 1.72 | - | 1.76 | 1.80 | 1.85 | - | 1.87 | 1.91 | 1.97 | - | 1.96 | 2.00 | 2.07 | - | 2.04 | 2.09 | 2.15 | - | 2.04 | 2.09 | 2.15 | - | 2.11 | 2.16 | 2.23 | - | |
| AMPS | 6.4 | 6.6 | 6.8 | - | 6.9 | 7.1 | 7.3 | - | 7.4 | 7.6 | 7.8 | - | 7.9 | 8.1 | 8.3 | - | 8.4 | 8.6 | 8.8 | - | 8.4 | 8.6 | 8.8 | - | 8.8 | 9.0 | 9.3 | - | |
| HI PR | 233 | 251 | 265 | - | 262 | 282 | 298 | - | 298 | 321 | 339 | - | 339 | 365 | 386 | - | 382 | 411 | 434 | - | 382 | 411 | 434 | - | 422 | 454 | 479 | - | |
| LO PR | 108 | 115 | 125 | - | 114 | 121 | 132 | - | 118 | 126 | 137 | - | 124 | 132 | 144 | - | 130 | 139 | 151 | - | 130 | 139 | 151 | - | 135 | 143 | 157 | - | |

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| 800 | MBh | 23.9 | 24.6 | 26.7 | 28.6 | 23.4 | 24.1 | 26.0 | 27.9 | 22.8 | 23.5 | 25.4 | 27.3 | 22.2 | 22.9 | 24.8 | 26.6 | 21.1 | 21.8 | 23.6 | 25.3 | 21.1 | 21.8 | 23.6 | 25.3 | 19.6 | 20.2 | 21.8 | 23.4 |
| | ST | 0.89 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.98 | 0.88 | 0.66 | 0.43 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.92 | 0.70 | 0.45 |
| | Delta T | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 22 | 20 | 17 | 12 | 22 | 20 | 17 | 12 | 20 | 19 | 16 | 11 |
| | KW | 1.71 | 1.74 | 1.79 | 1.85 | 1.83 | 1.87 | 1.93 | 1.99 | 1.94 | 1.99 | 2.05 | 2.11 | 2.04 | 2.09 | 2.15 | 2.22 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | 2.20 | 2.25 | 2.32 | 2.40 |
| | AMPS | 6.7 | 6.9 | 7.1 | 7.3 | 7.2 | 7.4 | 7.6 | 7.8 | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.4 | 8.7 | 9.0 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | 9.2 | 9.4 | 9.7 | 10.1 |
| | HI PR | 246 | 264 | 279 | 291 | 276 | 297 | 313 | 327 | 313 | 337 | 356 | 371 | 357 | 384 | 406 | 423 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | 444 | 478 | 504 | 526 |
| | LO PR | 113 | 121 | 132 | 140 | 120 | 127 | 139 | 148 | 124 | 132 | 145 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 170 | 142 | 151 | 165 | 175 | 142 | 151 | 165 | 175 |
| | MBh | 23.2 | 23.9 | 25.9 | 27.8 | 22.7 | 23.4 | 25.3 | 27.1 | 22.1 | 22.8 | 24.7 | 26.5 | 21.6 | 22.2 | 24.1 | 25.8 | 20.5 | 21.1 | 22.9 | 24.5 | 20.5 | 21.1 | 22.9 | 24.5 | 19.0 | 19.6 | 21.2 | 22.7 |
| | ST | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.39 | 0.91 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.97 | 0.87 | 0.66 | 0.42 | 0.97 | 0.87 | 0.66 | 0.42 | 0.98 | 0.88 | 0.66 | 0.43 |
| | Delta T | 23 | 21 | 17 | 12 | 23 | 22 | 18 | 12 | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 23 | 21 | 18 | 12 | 23 | 21 | 18 | 12 | 22 | 20 | 16 | 11 |
| | KW | 1.69 | 1.73 | 1.78 | 1.83 | 1.82 | 1.86 | 1.91 | 1.97 | 1.93 | 1.97 | 2.03 | 2.10 | 2.03 | 2.07 | 2.14 | 2.21 | 2.11 | 2.16 | 2.23 | 2.30 | 2.11 | 2.16 | 2.23 | 2.30 | 2.18 | 2.23 | 2.30 | 2.38 |
| | AMPS | 6.7 | 6.8 | 7.0 | 7.2 | 7.1 | 7.3 | 7.5 | 7.8 | 7.7 | 7.9 | 8.1 | 8.4 | 8.2 | 8.4 | 8.6 | 8.9 | 8.7 | 8.9 | 9.1 | 9.5 | 8.7 | 8.9 | 9.1 | 9.5 | 9.2 | 9.4 | 9.7 | 10.0 |
| HI PR | 243 | 262 | 276 | 288 | 273 | 294 | 310 | 323 | 310 | 334 | 353 | 368 | 353 | 380 | 402 | 419 | 398 | 428 | 452 | 471 | 398 | 428 | 452 | 471 | 439 | 473 | 499 | 521 | |
| LO PR | 112 | 119 | 130 | 139 | 119 | 126 | 138 | 147 | 123 | 131 | 143 | 152 | 129 | 138 | 150 | 160 | 136 | 144 | 158 | 168 | 136 | 144 | 158 | 168 | 140 | 149 | 163 | 174 | |
| MBh | 21.4 | 22.1 | 23.9 | 25.6 | 20.9 | 21.6 | 23.3 | 25.0 | 20.4 | 21.0 | 22.8 | 24.4 | 19.9 | 20.5 | 22.2 | 23.8 | 18.9 | 19.5 | 21.1 | 22.7 | 18.9 | 19.5 | 21.1 | 22.7 | 17.5 | 18.1 | 19.6 | 21.0 | |
| ST | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.94 | 0.84 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 | |
| Delta T | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 11 | |
| KW | 1.65 | 1.69 | 1.74 | 1.79 | 1.78 | 1.81 | 1.87 | 1.93 | 1.88 | 1.92 | 1.98 | 2.05 | 1.98 | 2.02 | 2.08 | 2.15 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.13 | 2.17 | 2.24 | 2.32 | |
| AMPS | 6.5 | 6.6 | 6.8 | 7.1 | 7.0 | 7.1 | 7.3 | 7.6 | 7.5 | 7.7 | 7.9 | 8.2 | 8.0 | 8.2 | 8.4 | 8.7 | 8.5 | 8.6 | 8.9 | 9.2 | 8.5 | 8.6 | 8.9 | 9.2 | 8.9 | 9.1 | 9.4 | 9.7 | |
| HI PR | 236 | 254 | 268 | 280 | 265 | 285 | 301 | 314 | 301 | 324 | 342 | 357 | 343 | 369 | 390 | 406 | 386 | 415 | 438 | 457 | 386 | 415 | 438 | 457 | 426 | 459 | 484 | 505 | |
| LO PR | 109 | 116 | 126 | 135 | 115 | 122 | 134 | 142 | 120 | 127 | 139 | 148 | 126 | 134 | 146 | 155 | 132 | 140 | 153 | 163 | 132 | 140 | 153 | 163 | 136 | 145 | 158 | 168 | |

* IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 NOTE: Shaded area is ACCA (TVA) conditions
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA 5mm Coils *PG1324***M41(B/C/D)*

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1324***M41B*

| | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 23.8 | | | 24.3 | | | 24.9 | | | 25.5 | | | 26.1 | | | 26.6 | | | 27.2 | | | 27.7 | | | 28.3 | | | 28.8 | | | 29.4 | | | 30.0 | | | | | | | | | | |
| 80 | MBh | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 0.90 | 0.80 | 0.59 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | | | | |
| | S/T | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 0.90 | 0.80 | 0.59 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 | 1.00 | 0.82 | 0.61 | 0.41 |
| | Delta T | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 24 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 23 | 21 | 17 | 22 | 23 | 21 | 17 | 21 | 21 | 21 | 19 | 21 | 21 | 21 | 19 | 21 | 21 | 21 | 19 | 21 | 21 | 21 | 19 |
| | KW | 1.72 | 1.75 | 1.81 | 1.86 | 1.85 | 1.89 | 1.94 | 2.01 | 1.96 | 2.00 | 2.06 | 2.13 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 | 2.06 | 2.10 | 2.17 | 2.24 |
| | AMPS | 6.8 | 6.9 | 7.1 | 7.4 | 7.3 | 7.4 | 7.6 | 7.9 | 7.8 | 8.0 | 8.3 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 | 8.3 | 8.5 | 8.8 | 9.1 |
| | HI PR | 248 | 267 | 282 | 294 | 278 | 300 | 316 | 330 | 317 | 341 | 360 | 375 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 | 361 | 388 | 410 | 427 |
| | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 | 132 | 141 | 153 | 163 |
| | MBh | 23.6 | 24.1 | 25.8 | 27.6 | 23.1 | 23.6 | 25.2 | 26.9 | 22.5 | 23.0 | 24.6 | 26.3 | 22.0 | 22.5 | 24.0 | 25.7 | 21.5 | 22.0 | 23.5 | 25.2 | 21.0 | 21.5 | 23.0 | 24.7 | 20.5 | 21.0 | 22.5 | 24.2 | 20.0 | 20.5 | 22.0 | 23.7 | 19.5 | 20.0 | 21.5 | 23.2 | 19.0 | 19.5 | 21.0 | 22.7 | | | | |
| | S/T | 0.94 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.96 | 0.78 | 0.59 | | | | |
| | Delta T | 26 | 25 | 21 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 |
| | KW | 1.71 | 1.74 | 1.79 | 1.85 | 1.83 | 1.87 | 1.93 | 1.99 | 1.94 | 1.99 | 2.05 | 2.11 | 2.04 | 2.09 | 2.15 | 2.22 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | 2.13 | 2.17 | 2.24 | 2.32 | | | | |
| | AMPS | 6.7 | 6.9 | 7.1 | 7.3 | 7.2 | 7.4 | 7.6 | 7.8 | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.4 | 8.7 | 9.0 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | 8.7 | 8.9 | 9.2 | 9.6 | | | | |
| HI PR | 246 | 264 | 279 | 291 | 276 | 297 | 313 | 327 | 313 | 337 | 356 | 372 | 357 | 384 | 406 | 423 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | 402 | 432 | 456 | 476 | | | | | |
| LO PR | 113 | 121 | 132 | 140 | 120 | 127 | 139 | 148 | 125 | 132 | 145 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 170 | 137 | 146 | 159 | 170 | 137 | 146 | 159 | 170 | 137 | 146 | 159 | 170 | 137 | 146 | 159 | 170 | 137 | 146 | 159 | 170 | | | | | |
| MBh | 21.8 | 22.3 | 23.8 | 25.5 | 21.3 | 21.8 | 23.3 | 24.9 | 20.8 | 21.3 | 22.7 | 24.3 | 20.3 | 20.7 | 22.2 | 23.7 | 19.3 | 19.7 | 21.0 | 22.5 | 19.3 | 19.7 | 21.0 | 22.5 | 19.3 | 19.7 | 21.0 | 22.5 | 19.3 | 19.7 | 21.0 | 22.5 | 19.3 | 19.7 | 21.0 | 22.5 | 19.3 | 19.7 | 21.0 | 22.5 | | | | | |
| S/T | 0.90 | 0.85 | 0.69 | 0.51 | 0.93 | 0.88 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.93 | 0.76 | 0.56 | 1.03 | 0.96 | 0.78 | 0.59 | 1.03 | 0.96 | 0.78 | 0.59 | 1.03 | 0.96 | 0.78 | 0.59 | 1.03 | 0.96 | 0.78 | 0.59 | 1.03 | 0.96 | 0.78 | 0.59 | 1.03 | 0.96 | 0.78 | 0.59 | | | | | |
| Delta T | 26 | 25 | 22 | 17 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 | | | | | | | | | |
| KW | 1.67 | 1.70 | 1.75 | 1.81 | 1.79 | 1.83 | 1.88 | 1.94 | 1.90 | 1.94 | 2.00 | 2.06 | 1.99 | 2.04 | 2.10 | 2.17 | 2.08 | 2.12 | 2.19 | 2.26 | 2.08 | 2.12 | 2.19 | 2.26 | 2.08 | 2.12 | 2.19 | 2.26 | 2.08 | 2.12 | 2.19 | 2.26 | 2.08 | 2.12 | 2.19 | 2.26 | | | | | | | | | |
| AMPS | 6.5 | 6.7 | 6.9 | 7.1 | 7.0 | 7.2 | 7.4 | 7.6 | 7.6 | 7.7 | 8.0 | 8.3 | 8.0 | 8.2 | 8.5 | 8.8 | 8.5 | 8.7 | 9.0 | 9.3 | 8.5 | 8.7 | 9.0 | 9.3 | 8.5 | 8.7 | 9.0 | 9.3 | 8.5 | 8.7 | 9.0 | 9.3 | 8.5 | 8.7 | 9.0 | 9.3 | | | | | | | | | |
| HI PR | 238 | 256 | 271 | 282 | 267 | 288 | 304 | 317 | 304 | 327 | 346 | 360 | 346 | 373 | 394 | 410 | 380 | 419 | 443 | 462 | 380 | 419 | 443 | 462 | 380 | 419 | 443 | 462 | 380 | 419 | 443 | 462 | 380 | 419 | 443 | 462 | | | | | | | | | |
| LO PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 128 | 140 | 149 | 127 | 135 | 147 | 157 | 133 | 141 | 154 | 164 | 133 | 141 | 154 | 164 | 133 | 141 | 154 | 164 | 133 | 141 | 154 | 164 | 133 | 141 | 154 | 164 | | | | | | | | | |
| MBh | 24.8 | 25.2 | 26.4 | 28.2 | 24.2 | 24.7 | 25.8 | 27.6 | 23.6 | 24.1 | 25.2 | 26.9 | 23.0 | 23.5 | 24.6 | 26.2 | 21.9 | 22.3 | 23.4 | 24.9 | 21.9 | 22.3 | 23.4 | 24.9 | 21.9 | 22.3 | 23.4 | 24.9 | 21.9 | 22.3 | 23.4 | 24.9 | 21.9 | 22.3 | 23.4 | 24.9 | | | | | | | | | |
| S/T | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.83 | | | | | | | | | | | | | |
| Delta T | 26 | 26 | 24 | 21 | 25 | 25 | 25 | 21 | 24 | 25 | 25 | 21 | 24 | 24 | 25 | 22 | 23 | 23 | 24 | 21 | 23 | 23 | 24 | 21 | 23 | 23 | 24 | 21 | 23 | 23 | 24 | 21 | | | | | | | | | | | | | |
| KW | 1.73 | 1.77 | 1.82 | 1.88 | 1.86 | 1.90 | 1.96 | 2.02 | 1.98 | 2.02 | 2.08 | 2.15 | 2.08 | 2.12 | 2.19 | 2.26 | 2.16 | 2.21 | 2.28 | 2.36 | 2.16 | 2.21 | 2.28 | 2.36 | 2.16 | 2.21 | 2.28 | 2.36 | 2.16 | 2.21 | 2.28 | 2.36 | | | | | | | | | | | | | |
| AMPS | 6.8 | 7.0 | 7.2 | 7.4 | 7.3 | 7.5 | 7.7 | 8.0 | 7.9 | 8.1 | 8.3 | 8.6 | 8.4 | 8.6 | 8.9 | 9.2 | 8.9 | 9.1 | 9.4 | 9.7 | 8.9 | 9.1 | 9.4 | 9.7 | 8.9 | 9.1 | 9.4 | 9.7 | 8.9 | 9.1 | 9.4 | 9.7 | | | | | | | | | | | | | |
| HI PR | 251 | 270 | 285 | 297 | 281 | 303 | 319 | 333 | 320 | 344 | 363 | 379 | 364 | 392 | 414 | 432 | 410 | 441 | 466 | 486 | 410 | 441 | 466 | 486 | 410 | 441 | 466 | 486 | 410 | 441 | 466 | 486 | | | | | | | | | | | | | |
| LO PR | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 140 | 149 | 162 | 173 | 140 | 149 | 162 | 173 | 140 | 149 | 162 | 173 | | | | | | | | | | | | | |
| MBh | 24.0 | 24.5 | 25.7 | 27.4 | 23.5 | 23.9 | 25.1 | 26.8 | 22.9 | 23.4 | 24.5 | 26.1 | 22.4 | 22.8 | 23.9 | 25.5 | 21.2 | 21.7 | 22.7 | 24.2 | 21.2 | 21.7 | 22.7 | 24.2 | 21.2 | 21.7 | 22.7 | 24.2 | 21.2 | 21.7 | 22.7 | 24.2 | | | | | | | | | | | | | |
| S/T | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.97 | 0.79 | | | | | | | | | | | | | | | | | |
| Delta T | 27 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 26 | 27 | 26 | 23 | 25 | 25 | 26 | 22 | 25 | 25 | 26 | 22 | 25 | 25 | 26 | 22 | | | | | | | | | | | | | | | | | |
| KW | 1.72 | 1.75 | 1.81 | 1.86 | 1.85 | 1.89 | 1.94 | 2.01 | 1.96 | 2.00 | 2.06 | 2.13 | 2.06 | 2.10 | 2.17 | 2.24 | 2.14 | 2.19 | 2.26 | 2.34 | 2.14 | 2.19 | 2.26 | 2.34 | 2.14 | 2.19 | 2.26 | 2.34 | | | | | | | | | | | | | | | | | |
| AMPS | 6.8 | 6.9 | 7.1 | 7.4 | 7.3 | 7.4 | 7.6 | 7.9 | 7.8 | 8.0 | 8.3 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 8.8 | 9.0 | 9.3 | 9.6 | 8.8 | 9.0 | 9.3 | 9.6 | 8.8 | 9.0 | 9.3 | 9.6 | | | | | | | | | | | | | | | | | |
| HI PR | 248 | 267 | 282 | 294 | 278 | 300 | 316 | 330 | 317 | 341 | 360 | 375 | 361 | 388 | 410 | 427 | 406 | 437 | 461 | 481 | 406 | 437 | 461 | 481 | 406 | 437 | 461 | 481 | | | | | | | | | | | | | | | | | |
| LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 153 | 163 | 138 | 147 | 161 | 171 | 138 | 147 | 161 | 171 | 138 | 147 | 161 | 171 | | | | | | | | | | | | | | | | | |
| MBh | 22.2 | 22.6 | 23.7 | 25.3 | 21.7 | 22.1 | 23.1 | 24.7 | 21.2 | 21.6 | 22.6 | 24.1 | 20.6 | 21.0 | 22.0 | 23.5 | 19.6 | 20.0 | 20.9 | 22.3 | 19.6 | 20.0 | 20.9 | 22.3 | 19.6 | 20.0 | 20.9 | 22.3 | | | | | | | | | | | | | | | | | |
| S/T | 0.95 | 0.91 | 0.82 | 0.67 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COOLING PERFORMANCE DATA 5mm Coils *PG1330**M41(B/C)*

EXPANDED PERFORMANCE DATA

COOLING OPERATION

MODEL: *GP1330***M41B*

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|-----------------------------|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|--|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | | 59 | 63 | 67 | 71 | | 59 | 63 | 67 | 71 | | 59 | 63 | 67 | 71 | | 59 | 63 | 67 | 71 | | 59 | 63 | 67 | 71 | |
| 70 | 1125 | MBh | 28.0 | 29.0 | 31.8 | - | 27.4 | 28.4 | 31.1 | - | 26.7 | 27.7 | 30.3 | - | 26.1 | 27.0 | 29.6 | - | 24.8 | 25.7 | 28.1 | - | 22.9 | 23.8 | 26.1 | - | | | | | |
| | | S/T | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.49 | - | 0.87 | 0.73 | 0.50 | - | 0.90 | 0.75 | 0.52 | - | 0.91 | 0.76 | 0.53 | - | | | | | |
| | | Delta T | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - | | | | | |
| | 1000 | KW | 2.09 | 2.13 | 2.19 | - | 2.24 | 2.28 | 2.35 | - | 2.37 | 2.42 | 2.49 | - | 2.49 | 2.54 | 2.62 | - | 2.59 | 2.64 | 2.72 | - | 2.67 | 2.73 | 2.82 | - | | | | | |
| | | A MPS | 7.7 | 7.9 | 8.1 | - | 8.3 | 8.5 | 8.7 | - | 8.9 | 9.1 | 9.4 | - | 9.5 | 9.7 | 10.0 | - | 10.1 | 10.3 | 10.7 | - | 10.7 | 10.9 | 11.3 | - | | | | | |
| | | HIPR | 238 | 256 | 271 | - | 267 | 288 | 304 | - | 304 | 327 | 345 | - | 346 | 373 | 393 | - | 390 | 419 | 443 | - | 430 | 463 | 489 | - | | | | | |
| | 875 | LO PR | 114 | 122 | 133 | - | 121 | 129 | 140 | - | 126 | 134 | 146 | - | 132 | 140 | 153 | - | 138 | 147 | 161 | - | 143 | 152 | 166 | - | | | | | |
| | | MBh | 27.2 | 28.2 | 30.9 | - | 26.6 | 27.5 | 30.2 | - | 25.9 | 26.9 | 29.5 | - | 25.3 | 26.2 | 28.7 | - | 24.0 | 24.9 | 27.3 | - | 22.3 | 23.1 | 25.3 | - | | | | | |
| | | S/T | 0.76 | 0.63 | 0.44 | - | 0.78 | 0.66 | 0.45 | - | 0.80 | 0.67 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.72 | 0.50 | - | 0.87 | 0.73 | 0.50 | - | | | | | |
| | 75 | 1125 | Delta T | 19 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 16 | 13 | - | 18 | 15 | 12 | - | | | | |
| | | | KW | 2.07 | 2.11 | 2.18 | - | 2.22 | 2.27 | 2.33 | - | 2.35 | 2.40 | 2.47 | - | 2.47 | 2.52 | 2.60 | - | 2.57 | 2.62 | 2.70 | - | 2.65 | 2.71 | 2.79 | - | | | | |
| | | | A MPS | 7.6 | 7.8 | 8.0 | - | 8.2 | 8.4 | 8.6 | - | 8.9 | 9.1 | 9.4 | - | 9.4 | 9.7 | 10.0 | - | 10.0 | 10.2 | 10.6 | - | 10.6 | 10.8 | 11.2 | - | | | | |
| | | 1000 | HIPR | 236 | 254 | 268 | - | 265 | 285 | 301 | - | 301 | 324 | 342 | - | 343 | 369 | 390 | - | 386 | 415 | 438 | - | 426 | 459 | 484 | - | | | | |
| | | | LO PR | 113 | 120 | 131 | - | 120 | 127 | 139 | - | 124 | 132 | 144 | - | 131 | 139 | 152 | - | 137 | 146 | 159 | - | 142 | 151 | 164 | - | | | | |
| | | | MBh | 25.1 | 26.0 | 28.5 | - | 24.5 | 25.4 | 27.9 | - | 23.9 | 24.8 | 27.2 | - | 23.4 | 24.2 | 26.5 | - | 22.2 | 23.0 | 25.2 | - | 20.6 | 21.3 | 23.3 | - | | | | |
| 875 | | S/T | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | | | | | |
| | | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | |
| | | KW | 2.03 | 2.07 | 2.13 | - | 2.17 | 2.21 | 2.28 | - | 2.30 | 2.34 | 2.42 | - | 2.41 | 2.46 | 2.54 | - | 2.51 | 2.56 | 2.64 | - | 2.59 | 2.64 | 2.73 | - | | | | | |
| 70 | | 1125 | A MPS | 7.4 | 7.6 | 7.8 | - | 8.0 | 8.2 | 8.4 | - | 8.6 | 8.8 | 9.1 | - | 9.2 | 9.4 | 9.7 | - | 9.7 | 10.0 | 10.3 | - | 10.3 | 10.5 | 10.9 | - | | | | |
| | | | HIPR | 229 | 246 | 260 | - | 257 | 276 | 292 | - | 292 | 314 | 332 | - | 333 | 358 | 378 | - | 374 | 403 | 425 | - | 413 | 445 | 470 | - | | | | |
| | | | LO PR | 110 | 117 | 128 | - | 116 | 123 | 135 | - | 121 | 128 | 140 | - | 127 | 135 | 147 | - | 133 | 141 | 154 | - | 137 | 146 | 159 | - | | | | |
| | | 1000 | MBh | 28.5 | 29.3 | 31.8 | 34.1 | 27.8 | 28.7 | 31.0 | 33.3 | 27.2 | 28.0 | 30.3 | 32.5 | 26.5 | 27.3 | 29.5 | 31.7 | 25.2 | 25.9 | 28.1 | 30.1 | 23.3 | 24.0 | 26.0 | 27.9 | | | | |
| | | | S/T | 0.90 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.96 | 0.86 | 0.65 | 0.42 | 0.99 | 0.89 | 0.67 | 0.43 | 1.00 | 0.92 | 0.70 | 0.45 | 1.00 | 0.93 | 0.70 | 0.45 | | | | |
| | | | Delta T | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 19 | 16 | 11 | 19 | 18 | 15 | 10 | | | | |
| | 875 | KW | 2.10 | 2.14 | 2.21 | 2.28 | 2.25 | 2.30 | 2.37 | 2.44 | 2.39 | 2.44 | 2.51 | 2.59 | 2.51 | 2.56 | 2.64 | 2.72 | 2.61 | 2.66 | 2.75 | 2.84 | 2.69 | 2.75 | 2.84 | 2.93 | | | | | |
| | | A MPS | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 9.0 | 9.2 | 9.5 | 9.9 | 9.6 | 9.8 | 10.1 | 10.5 | 10.2 | 10.4 | 10.8 | 11.2 | 10.8 | 11.0 | 11.4 | 11.8 | | | | | |
| | | HIPR | 241 | 259 | 273 | 285 | 270 | 291 | 307 | 320 | 307 | 330 | 349 | 364 | 350 | 376 | 397 | 415 | 393 | 423 | 447 | 466 | 435 | 468 | 494 | 515 | | | | | |
| | 75 | 1125 | LO PR | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 147 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 144 | 154 | 168 | 179 | | | | |
| | | | MBh | 27.7 | 28.5 | 30.8 | 33.1 | 27.0 | 27.8 | 30.1 | 32.3 | 26.4 | 27.2 | 29.4 | 31.6 | 25.7 | 26.5 | 28.7 | 30.8 | 24.5 | 25.2 | 27.3 | 29.2 | 22.7 | 23.3 | 25.2 | 27.1 | | | | |
| | | | S/T | 0.86 | 0.77 | 0.58 | 0.37 | 0.89 | 0.80 | 0.60 | 0.39 | 0.91 | 0.82 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.98 | 0.88 | 0.66 | 0.43 | 0.99 | 0.88 | 0.67 | 0.43 | | | | |
| | | 1000 | Delta T | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 20 | 17 | 11 | 21 | 19 | 16 | 11 | | | | |
| | | | KW | 2.09 | 2.13 | 2.19 | 2.26 | 2.24 | 2.28 | 2.35 | 2.42 | 2.37 | 2.42 | 2.49 | 2.57 | 2.49 | 2.54 | 2.62 | 2.70 | 2.59 | 2.64 | 2.73 | 2.81 | 2.67 | 2.73 | 2.82 | 2.91 | | | | |
| | | | A MPS | 7.7 | 7.9 | 8.1 | 8.4 | 8.3 | 8.5 | 8.7 | 9.0 | 8.9 | 9.1 | 9.4 | 9.8 | 9.5 | 9.7 | 10.1 | 10.4 | 10.1 | 10.3 | 10.7 | 11.1 | 10.7 | 10.9 | 11.3 | 11.7 | | | | |
| 875 | | HIPR | 238 | 256 | 271 | 282 | 267 | 288 | 304 | 317 | 304 | 327 | 346 | 360 | 346 | 373 | 394 | 410 | 390 | 419 | 443 | 462 | 430 | 463 | 489 | 510 | | | | | |
| | | LO PR | 114 | 122 | 133 | 141 | 121 | 129 | 140 | 149 | 126 | 134 | 146 | 155 | 132 | 140 | 153 | 163 | 138 | 147 | 161 | 171 | 143 | 152 | 166 | 177 | | | | | |
| | | MBh | 25.5 | 26.3 | 28.5 | 30.5 | 24.9 | 25.7 | 27.8 | 29.8 | 24.4 | 25.1 | 27.1 | 29.1 | 23.8 | 24.5 | 26.5 | 28.4 | 22.6 | 23.2 | 25.2 | 27.0 | 20.9 | 21.5 | 23.3 | 25.0 | | | | | |
| 70 | | 1125 | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.85 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 | | | | |
| | | | Delta T | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | | | | |
| | | | KW | 2.04 | 2.08 | 2.14 | 2.21 | 2.19 | 2.23 | 2.30 | 2.37 | 2.32 | 2.36 | 2.44 | 2.51 | 2.43 | 2.48 | 2.56 | 2.64 | 2.53 | 2.58 | 2.66 | 2.74 | 2.61 | 2.66 | 2.75 | 2.84 | | | | |
| | | 1000 | A MPS | 7.5 | 7.7 | 7.9 | 8.2 | 8.1 | 8.2 | 8.5 | 8.8 | 8.7 | 8.9 | 9.2 | 9.5 | 9.3 | 9.5 | 9.8 | 10.1 | 9.8 | 10.1 | 10.4 | 10.8 | 10.4 | 10.6 | 11.0 | 11.4 | | | | |
| | | | HIPR | 231 | 249 | 263 | 274 | 259 | 279 | 295 | 307 | 295 | 317 | 335 | 350 | 336 | 361 | 382 | 398 | 378 | 407 | 429 | 448 | 418 | 449 | 474 | 495 | | | | |
| | | | LO PR | 111 | 118 | 129 | 137 | 117 | 125 | 136 | 145 | 122 | 130 | 141 | 151 | 128 | 136 | 149 | 158 | 134 | 143 | 156 | 166 | 139 | 148 | 161 | 172 | | | | |

* IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 NOTE: Shaded area is ACOA (TVA) conditions
 KW = Total system power
 A MPS: Unit amps (comp.+ evaporator + condenser fan motors)

| | | Outdoor Ambient Temperature | | | | | | | | Outdoor Ambient Temperature | | | | | | | | Outdoor Ambient Temperature | | | | | | | | |
|------|--|--------------------------------------|------|------|------|------|------|------|------|-----------------------------|------|------|------|------|------|------|------|-----------------------------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 29.0 | 29.6 | 31.7 | 33.9 | 28.3 | 29.0 | 30.9 | 33.1 | 27.7 | 28.3 | 30.2 | 32.3 | 27.0 | 27.6 | 29.5 | 31.5 | 25.6 | 26.2 | 28.0 | 29.9 | 23.7 | 24.3 | 25.9 | 27.7 | |
| 1125 | | MBh | 1.00 | 0.93 | 0.76 | 0.56 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.86 | 0.64 | 1.00 | 1.00 | 0.87 | 0.65 |
| | | Delta T | 24 | 22 | 20 | 16 | 23 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 22 | 23 | 20 | 16 | 21 | 21 | 20 | 16 | 19 | 20 | 18 | 15 |
| | | KW | 2.12 | 2.16 | 2.23 | 2.29 | 2.27 | 2.32 | 2.39 | 2.46 | 2.41 | 2.46 | 2.53 | 2.61 | 2.53 | 2.58 | 2.66 | 2.75 | 2.63 | 2.68 | 2.77 | 2.86 | 2.72 | 2.77 | 2.86 | 2.96 |
| | | AMPS | 7.8 | 8.0 | 8.2 | 8.5 | 8.4 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.7 | 9.9 | 10.2 | 10.6 | 10.3 | 10.5 | 10.9 | 11.3 | 10.9 | 11.1 | 11.5 | 11.9 |
| | | HI PR | 243 | 262 | 276 | 288 | 273 | 294 | 310 | 323 | 310 | 334 | 352 | 368 | 353 | 380 | 401 | 419 | 397 | 428 | 452 | 471 | 439 | 473 | 499 | 520 |
| | | LO PR | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 152 | 128 | 136 | 149 | 158 | 135 | 143 | 156 | 166 | 141 | 150 | 164 | 174 | 146 | 155 | 169 | 180 |
| 80 | | MBh | 28.2 | 28.8 | 30.7 | 32.9 | 27.5 | 28.1 | 30.0 | 32.1 | 26.9 | 27.4 | 29.3 | 31.3 | 26.2 | 26.8 | 28.6 | 30.6 | 24.9 | 25.4 | 27.2 | 29.0 | 23.1 | 23.6 | 25.2 | 26.9 |
| | | S/T | 0.94 | 0.89 | 0.72 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.83 | 0.62 |
| | | Delta T | 24 | 23 | 20 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 | 24 | 24 | 21 | 17 | 23 | 23 | 20 | 16 | 21 | 22 | 19 | 15 |
| | | KW | 2.10 | 2.15 | 2.21 | 2.28 | 2.26 | 2.30 | 2.37 | 2.44 | 2.39 | 2.44 | 2.51 | 2.59 | 2.51 | 2.56 | 2.64 | 2.72 | 2.61 | 2.66 | 2.75 | 2.84 | 2.69 | 2.75 | 2.84 | 2.93 |
| | | AMPS | 7.8 | 7.9 | 8.2 | 8.5 | 8.3 | 8.5 | 8.8 | 9.1 | 9.0 | 9.2 | 9.5 | 9.9 | 9.6 | 9.8 | 10.1 | 10.5 | 10.2 | 10.4 | 10.8 | 11.2 | 10.8 | 11.0 | 11.4 | 11.8 |
| | | HI PR | 241 | 259 | 273 | 285 | 270 | 291 | 307 | 320 | 307 | 331 | 349 | 364 | 350 | 376 | 398 | 415 | 394 | 423 | 447 | 466 | 435 | 468 | 494 | 515 |
| | | LO PR | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 147 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 144 | 154 | 168 | 179 |
| 875 | | MBh | 26.0 | 26.6 | 28.4 | 30.3 | 25.4 | 25.9 | 27.7 | 29.6 | 24.8 | 25.3 | 27.1 | 28.9 | 24.2 | 24.7 | 26.4 | 28.2 | 23.0 | 23.5 | 25.1 | 26.8 | 21.3 | 21.7 | 23.2 | 24.8 |
| | | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.04 | 0.97 | 0.79 | 0.59 | 1.04 | 0.98 | 0.80 | 0.60 |
| | | Delta T | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 23 | 22 | 19 | 16 |
| | | KW | 2.06 | 2.10 | 2.16 | 2.22 | 2.20 | 2.25 | 2.32 | 2.39 | 2.33 | 2.38 | 2.45 | 2.53 | 2.45 | 2.50 | 2.58 | 2.66 | 2.55 | 2.60 | 2.68 | 2.77 | 2.63 | 2.69 | 2.77 | 2.86 |
| | | AMPS | 7.6 | 7.7 | 8.0 | 8.2 | 8.1 | 8.3 | 8.6 | 8.9 | 8.8 | 9.0 | 9.3 | 9.6 | 9.4 | 9.6 | 9.9 | 10.2 | 9.9 | 10.2 | 10.5 | 10.9 | 10.5 | 10.7 | 11.1 | 11.5 |
| | | HI PR | 233 | 251 | 265 | 277 | 262 | 282 | 298 | 310 | 298 | 321 | 339 | 353 | 339 | 365 | 386 | 402 | 382 | 411 | 434 | 452 | 422 | 454 | 479 | 500 |
| | | LO PR | 112 | 119 | 130 | 139 | 118 | 126 | 137 | 146 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 160 | 135 | 144 | 157 | 168 | 140 | 149 | 163 | 173 |

| | | Outdoor Ambient Temperature | | | | | | | | Outdoor Ambient Temperature | | | | | | | | Outdoor Ambient Temperature | | | | | | | | |
|------|--|--------------------------------------|------|------|---|------|------|------|--|-----------------------------|------|------|---|------|------|------|--|-----------------------------|------|------|---|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 29.0 | 29.6 | 31.7 | 33.9 <th>28.3</th> <th>29.0</th> <th>30.9</th> <th>33.1 <th>27.7</th><th>28.3</th><th>30.2</th><th>32.3 <th>27.0</th><th>27.6</th><th>29.5</th><th>31.5 <th>25.6</th><th>26.2</th><th>28.0</th><th>29.9 <th>23.7</th><th>24.3</th><th>25.9</th><th>27.7 </th></th></th></th></th> | 28.3 | 29.0 | 30.9 | 33.1 <th>27.7</th> <th>28.3</th> <th>30.2</th> <th>32.3 <th>27.0</th><th>27.6</th><th>29.5</th><th>31.5 <th>25.6</th><th>26.2</th><th>28.0</th><th>29.9 <th>23.7</th><th>24.3</th><th>25.9</th><th>27.7 </th></th></th></th> | 27.7 | 28.3 | 30.2 | 32.3 <th>27.0</th> <th>27.6</th> <th>29.5</th> <th>31.5 <th>25.6</th><th>26.2</th><th>28.0</th><th>29.9 <th>23.7</th><th>24.3</th><th>25.9</th><th>27.7 </th></th></th> | 27.0 | 27.6 | 29.5 | 31.5 <th>25.6</th> <th>26.2</th> <th>28.0</th> <th>29.9 <th>23.7</th><th>24.3</th><th>25.9</th><th>27.7 </th></th> | 25.6 | 26.2 | 28.0 | 29.9 <th>23.7</th> <th>24.3</th> <th>25.9</th> <th>27.7 </th> | 23.7 | 24.3 | 25.9 | 27.7 | |
| 1125 | | MBh | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.84 |
| | | Delta T | 24 | 25 | 23 | 20 | 24 | 24 | 24 | 20 | 23 | 23 | 24 | 20 | 22 | 23 | 24 | 21 | 21 | 22 | 23 | 20 | 20 | 20 | 21 | 19 |
| | | KW | 2.13 | 2.18 | 2.24 | 2.31 | 2.29 | 2.34 | 2.41 | 2.48 | 2.43 | 2.48 | 2.55 | 2.63 | 2.55 | 2.60 | 2.68 | 2.77 | 2.65 | 2.71 | 2.79 | 2.88 | 2.74 | 2.80 | 2.89 | 2.98 |
| | | AMPS | 7.9 | 8.1 | 8.3 | 8.6 | 8.5 | 8.7 | 8.9 | 9.3 | 9.2 | 9.4 | 9.7 | 10.0 | 9.8 | 10.0 | 10.3 | 10.7 | 10.4 | 10.6 | 11.0 | 11.4 | 11.0 | 11.2 | 11.6 | 12.0 |
| | | HI PR | 245 | 264 | 279 | 291 | 275 | 296 | 313 | 326 | 313 | 337 | 356 | 371 | 357 | 384 | 405 | 423 | 401 | 432 | 456 | 476 | 444 | 477 | 504 | 526 |
| | | LO PR | 118 | 125 | 137 | 146 | 125 | 132 | 145 | 154 | 129 | 138 | 150 | 160 | 136 | 145 | 158 | 168 | 142 | 152 | 165 | 176 | 147 | 157 | 171 | 182 |
| 1000 | | MBh | 28.7 | 29.2 | 30.6 | 32.6 | 28.0 | 28.5 | 29.9 | 31.9 | 27.3 | 27.9 | 29.2 | 31.1 | 26.7 | 27.2 | 28.5 | 30.4 | 25.3 | 25.8 | 27.0 | 28.8 | 23.5 | 23.9 | 25.0 | 26.7 |
| | | S/T | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 0.99 | 0.80 |
| | | Delta T | 26 | 26 | 24 | 21 | 26 | 26 | 25 | 21 | 25 | 26 | 25 | 21 | 25 | 25 | 25 | 21 | 23 | 24 | 24 | 21 | 22 | 22 | 23 | 20 |
| | | KW | 2.12 | 2.16 | 2.23 | 2.29 | 2.27 | 2.32 | 2.39 | 2.46 | 2.41 | 2.46 | 2.53 | 2.61 | 2.53 | 2.58 | 2.66 | 2.75 | 2.63 | 2.68 | 2.77 | 2.86 | 2.72 | 2.77 | 2.86 | 2.96 |
| | | AMPS | 7.8 | 8.0 | 8.2 | 8.5 | 8.4 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.7 | 9.9 | 10.2 | 10.6 | 10.3 | 10.5 | 10.9 | 11.3 | 10.9 | 11.1 | 11.5 | 11.9 |
| | | HI PR | 243 | 262 | 276 | 288 | 273 | 294 | 310 | 323 | 310 | 334 | 352 | 368 | 353 | 380 | 401 | 419 | 397 | 428 | 452 | 471 | 439 | 473 | 499 | 520 |
| | | LO PR | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 152 | 128 | 136 | 149 | 158 | 135 | 143 | 156 | 166 | 141 | 150 | 164 | 174 | 146 | 155 | 169 | 180 |
| 875 | | MBh | 26.4 | 27.0 | 28.2 | 30.1 | 25.8 | 26.3 | 27.6 | 29.4 | 25.2 | 25.7 | 26.9 | 28.7 | 24.6 | 25.1 | 26.3 | 28.0 | 23.4 | 23.8 | 25.0 | 26.6 | 21.7 | 22.1 | 23.1 | 24.7 |
| | | S/T | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 |
| | | Delta T | 27 | 26 | 25 | 21 | 27 | 26 | 25 | 22 | 26 | 26 | 25 | 22 | 26 | 26 | 26 | 22 | 25 | 25 | 25 | 21 | 23 | 23 | 23 | 20 |
| | | KW | 2.07 | 2.11 | 2.17 | 2.24 | 2.22 | 2.27 | 2.33 | 2.41 | 2.35 | 2.40 | 2.47 | 2.55 | 2.47 | 2.52 | 2.60 | 2.68 | 2.57 | 2.62 | 2.70 | 2.79 | 2.65 | 2.71 | 2.79 | 2.88 |
| | | AMPS | 7.6 | 7.8 | 8.0 | 8.3 | 8.2 | 8.4 | 8.6 | 8.9 | 8.9 | 9.1 | 9.3 | 9.7 | 9.4 | 9.7 | 10.0 | 10.3 | 10.0 | 10.2 | 10.6 | 11.0 | 10.6 | 10.8 | 11.2 | 11.6 |
| | | HI PR | 236 | 254 | 268 | 279 | 265 | 285 | 301 | 314 | 301 | 324 | 342 | 357 | 343 | 369 | 389 | 406 | 386 | 415 | 438 | 457 | 426 | 458 | 484 | 505 |
| | | LO PR | 113 | 120 | 131 | 140 | 120 | 127 | 139 | 148 | 124 | 132 | 144 | 154 | 131 | 139 | 152 | 161 | 137 | 146 | 159 | 169 | 141 | 151 | 164 | 175 |

* NOTE: Shaded area reflects AHRl rating conditions
 High and low pressures are measured at the liquid and suction access fittings.

IDB: Entering Indoor Dry Bulb Temperature

KW = Total system power

AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA 5mm Coils *PG1336***M41(B/D)*

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1336***M41B*

| IDB* Airflow | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|-----|----|----|----|----|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 |
| 70 | MBh | 35.1 | 36.4 | 39.8 | - | 34.3 | 35.5 | 38.9 | - | 33.4 | 34.7 | 38.0 | - | 32.6 | 33.8 | 37.1 | - | 31.0 | 32.1 | 35.2 | - | 28.7 | 29.8 | 32.6 | - | | | | | | |
| | S/T | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.67 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.49 | - | 0.89 | 0.74 | 0.51 | - | 0.90 | 0.75 | 0.52 | - | | | | | | |
| | Delta T | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 18 | 15 | 12 | - | | | | | | |
| | KW | 2.57 | 2.62 | 2.70 | - | 2.76 | 2.82 | 2.90 | - | 2.93 | 2.99 | 3.08 | - | 3.07 | 3.14 | 3.24 | - | 3.20 | 3.27 | 3.37 | - | 3.31 | 3.38 | 3.49 | - | | | | | | |
| | AMPS | 11.1 | 11.3 | 11.6 | - | 11.8 | 12.1 | 12.4 | - | 12.7 | 12.9 | 13.3 | - | 13.4 | 13.7 | 14.1 | - | 14.1 | 14.4 | 14.9 | - | 14.9 | 15.2 | 15.6 | - | | | | | | |
| | Hi PR | 249 | 268 | 283 | - | 280 | 301 | 318 | - | 318 | 343 | 362 | - | 363 | 390 | 412 | - | 408 | 439 | 463 | - | 451 | 485 | 512 | - | | | | | | |
| | LO PR | 111 | 119 | 129 | - | 118 | 125 | 137 | - | 122 | 130 | 142 | - | 129 | 137 | 149 | - | 135 | 143 | 156 | - | 139 | 148 | 162 | - | | | | | | |
| | MBh | 34.1 | 35.3 | 38.7 | - | 33.3 | 34.5 | 37.8 | - | 32.5 | 33.7 | 36.9 | - | 31.7 | 32.8 | 36.0 | - | 30.1 | 31.2 | 34.2 | - | 27.9 | 28.9 | 31.7 | - | | | | | | |
| | S/T | 0.74 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.85 | 0.71 | 0.49 | - | 0.85 | 0.71 | 0.49 | - | | | | | | |
| | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 18 | 16 | 12 | - | | | | | | |
| KW | 2.55 | 2.60 | 2.68 | - | 2.74 | 2.80 | 2.88 | - | 2.90 | 2.97 | 3.06 | - | 3.05 | 3.11 | 3.21 | - | 3.17 | 3.24 | 3.35 | - | 3.28 | 3.35 | 3.46 | - | | | | | | | |
| AMPS | 11.0 | 11.2 | 11.5 | - | 11.7 | 12.0 | 12.3 | - | 12.6 | 12.8 | 13.2 | - | 13.3 | 13.6 | 14.0 | - | 14.0 | 14.3 | 14.7 | - | 14.8 | 15.1 | 15.5 | - | | | | | | | |
| Hi PR | 247 | 266 | 281 | - | 277 | 298 | 315 | - | 315 | 339 | 358 | - | 359 | 386 | 408 | - | 404 | 435 | 459 | - | 446 | 480 | 507 | - | | | | | | | |
| LO PR | 110 | 117 | 128 | - | 117 | 124 | 135 | - | 121 | 129 | 141 | - | 127 | 135 | 148 | - | 133 | 142 | 155 | - | 138 | 147 | 160 | - | | | | | | | |
| MBh | 31.4 | 32.6 | 35.7 | - | 30.7 | 31.8 | 34.9 | - | 30.0 | 31.1 | 34.0 | - | 29.2 | 30.3 | 33.2 | - | 27.8 | 28.8 | 31.5 | - | 25.7 | 26.7 | 29.2 | - | | | | | | | |
| S/T | 0.72 | 0.60 | 0.41 | - | 0.74 | 0.62 | 0.43 | - | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.82 | 0.69 | 0.48 | - | | | | | | | |
| Delta T | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 16 | 12 | - | | | | | | | |
| KW | 2.49 | 2.54 | 2.62 | - | 2.68 | 2.73 | 2.81 | - | 2.84 | 2.89 | 2.98 | - | 2.98 | 3.04 | 3.14 | - | 3.10 | 3.16 | 3.26 | - | 3.20 | 3.27 | 3.37 | - | | | | | | | |
| AMPS | 10.8 | 11.0 | 11.3 | - | 11.5 | 11.7 | 12.0 | - | 12.3 | 12.5 | 12.9 | - | 13.0 | 13.3 | 13.6 | - | 13.7 | 14.0 | 14.4 | - | 14.4 | 14.7 | 15.1 | - | | | | | | | |
| Hi PR | 240 | 258 | 272 | - | 269 | 289 | 305 | - | 306 | 329 | 347 | - | 348 | 375 | 396 | - | 392 | 422 | 445 | - | 433 | 466 | 492 | - | | | | | | | |
| LO PR | 107 | 114 | 124 | - | 113 | 120 | 131 | - | 118 | 125 | 136 | - | 123 | 131 | 143 | - | 129 | 138 | 150 | - | 134 | 142 | 155 | - | | | | | | | |
| 75 | MBh | 35.7 | 36.7 | 39.8 | 42.7 | 34.8 | 35.9 | 38.8 | 41.7 | 34.0 | 35.0 | 37.9 | 40.7 | 33.2 | 34.2 | 37.0 | 39.7 | 31.5 | 32.5 | 35.1 | 37.7 | 29.2 | 30.1 | 32.5 | 34.9 | | | | | | |
| | S/T | 0.89 | 0.79 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.97 | 0.87 | 0.66 | 0.42 | 1.00 | 0.90 | 0.68 | 0.44 | 1.00 | 0.91 | 0.69 | 0.44 | | | | | | |
| | Delta T | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 11 | 21 | 20 | 16 | 11 | 20 | 19 | 15 | 11 | | | | | | |
| | KW | 2.59 | 2.64 | 2.72 | 2.81 | 2.78 | 2.84 | 2.93 | 3.02 | 2.95 | 3.01 | 3.11 | 3.21 | 3.10 | 3.17 | 3.27 | 3.37 | 3.23 | 3.29 | 3.40 | 3.51 | 3.33 | 3.41 | 3.52 | 3.63 | | | | | | |
| | AMPS | 11.2 | 11.4 | 11.7 | 12.1 | 11.9 | 12.2 | 12.5 | 12.9 | 12.8 | 13.0 | 13.4 | 13.8 | 13.5 | 13.8 | 14.2 | 14.7 | 14.3 | 14.6 | 15.0 | 15.5 | 15.0 | 15.3 | 15.8 | 16.3 | | | | | | |
| | Hi PR | 252 | 271 | 286 | 299 | 283 | 304 | 321 | 335 | 322 | 346 | 365 | 381 | 366 | 394 | 416 | 434 | 412 | 443 | 468 | 488 | 455 | 490 | 517 | 540 | | | | | | |
| | LO PR | 113 | 120 | 131 | 139 | 119 | 127 | 138 | 147 | 124 | 131 | 144 | 153 | 130 | 138 | 151 | 161 | 136 | 145 | 158 | 168 | 141 | 150 | 163 | 174 | | | | | | |
| | MBh | 34.6 | 35.7 | 38.6 | 41.4 | 33.8 | 34.8 | 37.7 | 40.5 | 33.0 | 34.0 | 36.8 | 39.5 | 32.2 | 33.2 | 35.9 | 38.5 | 30.6 | 31.5 | 34.1 | 36.6 | 28.4 | 29.2 | 31.6 | 33.9 | | | | | | |
| | S/T | 0.85 | 0.76 | 0.57 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 0.97 | 0.87 | 0.66 | 0.42 | | | | | | |
| | Delta T | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | | | | | | |
| KW | 2.57 | 2.62 | 2.70 | 2.79 | 2.76 | 2.82 | 2.90 | 3.00 | 2.93 | 2.99 | 3.08 | 3.18 | 3.07 | 3.14 | 3.24 | 3.34 | 3.20 | 3.27 | 3.37 | 3.48 | 3.31 | 3.38 | 3.49 | 3.60 | | | | | | | |
| AMPS | 11.1 | 11.3 | 11.6 | 12.0 | 11.8 | 12.1 | 12.4 | 12.8 | 12.7 | 12.9 | 13.3 | 13.7 | 13.4 | 13.7 | 14.1 | 14.5 | 14.2 | 14.5 | 14.9 | 15.4 | 14.9 | 15.2 | 15.6 | 16.2 | | | | | | | |
| Hi PR | 249 | 268 | 283 | 296 | 280 | 301 | 318 | 332 | 318 | 343 | 362 | 377 | 363 | 390 | 412 | 430 | 408 | 439 | 464 | 483 | 451 | 485 | 512 | 534 | | | | | | | |
| LO PR | 111 | 119 | 129 | 138 | 118 | 125 | 137 | 146 | 122 | 130 | 142 | 151 | 129 | 137 | 149 | 159 | 135 | 143 | 156 | 167 | 139 | 148 | 162 | 172 | | | | | | | |
| MBh | 32.0 | 32.9 | 35.6 | 38.2 | 31.2 | 32.2 | 34.8 | 37.3 | 30.5 | 31.4 | 34.0 | 36.5 | 29.7 | 30.6 | 33.1 | 35.6 | 28.3 | 29.1 | 31.5 | 33.8 | 26.2 | 26.9 | 29.2 | 31.3 | | | | | | | |
| S/T | 0.82 | 0.73 | 0.55 | 0.35 | 0.84 | 0.76 | 0.57 | 0.37 | 0.87 | 0.77 | 0.59 | 0.38 | 0.89 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.94 | 0.84 | 0.63 | 0.41 | | | | | | | |
| Delta T | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 18 | 12 | 23 | 21 | 17 | 12 | 21 | 20 | 16 | 11 | | | | | | | |
| KW | 2.51 | 2.56 | 2.64 | 2.72 | 2.70 | 2.75 | 2.84 | 2.92 | 2.86 | 2.92 | 3.01 | 3.10 | 3.00 | 3.06 | 3.16 | 3.26 | 3.12 | 3.19 | 3.29 | 3.40 | 3.23 | 3.30 | 3.40 | 3.51 | | | | | | | |
| AMPS | 10.8 | 11.1 | 11.4 | 11.7 | 11.6 | 11.8 | 12.1 | 12.5 | 12.4 | 12.6 | 13.0 | 13.4 | 13.1 | 13.4 | 13.8 | 14.2 | 13.8 | 14.1 | 14.5 | 15.0 | 14.5 | 14.8 | 15.3 | 15.8 | | | | | | | |
| Hi PR | 242 | 260 | 275 | 287 | 272 | 292 | 309 | 322 | 309 | 332 | 351 | 366 | 352 | 378 | 400 | 417 | 396 | 426 | 450 | 469 | 437 | 470 | 497 | 518 | | | | | | | |
| LO PR | 108 | 115 | 126 | 134 | 114 | 122 | 133 | 141 | 119 | 126 | 138 | 147 | 125 | 133 | 145 | 154 | 131 | 139 | 152 | 162 | 135 | 144 | 157 | 167 | | | | | | | |

* IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 NOTE: Shaded area is A COA (TVA) conditions
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

| IDB* | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 | 59 | 63 | 67 | 71 | 75 |
| 80 | 1350 | MBh | 36.3 | 37.1 | 39.6 | 42.4 | 35.5 | 36.2 | 38.7 | 41.4 | 34.6 | 35.4 | 37.8 | 40.4 | 33.8 | 34.5 | 36.9 | 39.4 | 32.1 | 32.8 | 35.0 | 37.4 | 29.7 | 30.4 | 32.4 | 34.7 | | | | | |
| | | S/T | 1.00 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.84 | 0.63 | 1.00 | 1.00 | 0.85 | 0.64 | | | | | |
| | | Delta T | 25 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 23 | 24 | 20 | 16 | 23 | 22 | 22 | 20 | 20 | 21 | 19 | 15 | | | | | |
| | | KW | 2.61 | 2.66 | 2.74 | 2.83 | 2.80 | 2.86 | 2.95 | 3.04 | 2.97 | 3.04 | 3.13 | 3.23 | 3.12 | 3.19 | 3.29 | 3.40 | 3.25 | 3.32 | 3.43 | 3.54 | 3.36 | 3.44 | 3.55 | 3.66 | | | | | |
| | | AMPS | 11.3 | 11.5 | 11.8 | 12.2 | 12.0 | 12.3 | 12.6 | 13.0 | 12.9 | 13.1 | 13.5 | 13.9 | 13.6 | 13.9 | 14.3 | 14.8 | 14.4 | 14.4 | 14.7 | 15.1 | 15.6 | 15.1 | 15.4 | 15.9 | 16.4 | | | | |
| | 1200 | HIPR | 255 | 274 | 289 | 302 | 286 | 307 | 325 | 338 | 325 | 350 | 369 | 385 | 370 | 398 | 420 | 438 | 416 | 448 | 473 | 493 | 480 | 495 | 523 | 545 | | | | | |
| | | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | | | | | |
| | | MBh | 35.3 | 36.0 | 38.5 | 41.1 | 34.4 | 35.2 | 37.6 | 40.2 | 33.6 | 34.3 | 36.7 | 39.2 | 32.8 | 33.5 | 35.8 | 38.3 | 31.2 | 31.8 | 34.0 | 36.4 | 28.9 | 29.5 | 31.5 | 33.7 | | | | | |
| | | S/T | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 0.99 | 0.81 | 0.60 | 1.00 | 1.00 | 0.81 | 0.61 | | | | | |
| | | Delta T | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 24 | 24 | 24 | 21 | 17 | 22 | 23 | 20 | 16 | | | | |
| 1050 | KW | 2.59 | 2.64 | 2.72 | 2.81 | 2.78 | 2.84 | 2.93 | 3.02 | 2.95 | 3.01 | 3.11 | 3.21 | 3.10 | 3.17 | 3.27 | 3.37 | 3.23 | 3.30 | 3.40 | 3.51 | 3.33 | 3.41 | 3.52 | 3.63 | | | | | | |
| | AMPS | 11.2 | 11.4 | 11.7 | 12.1 | 11.9 | 12.2 | 12.5 | 12.9 | 12.8 | 13.0 | 13.4 | 13.8 | 13.5 | 13.8 | 14.2 | 14.7 | 14.3 | 14.6 | 15.0 | 15.5 | 15.0 | 15.3 | 15.8 | 16.3 | | | | | | |
| | HIPR | 252 | 271 | 286 | 299 | 283 | 304 | 321 | 335 | 322 | 346 | 365 | 381 | 366 | 394 | 416 | 434 | 412 | 443 | 468 | 488 | 455 | 490 | 517 | 540 | | | | | | |
| | LO PR | 113 | 120 | 131 | 139 | 119 | 127 | 138 | 147 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 161 | 136 | 145 | 158 | 168 | 141 | 150 | 163 | 174 | | | | | | |
| | MBh | 32.5 | 33.2 | 35.5 | 38.0 | 31.8 | 32.5 | 34.7 | 37.1 | 31.0 | 31.7 | 33.9 | 36.2 | 30.3 | 30.9 | 33.0 | 35.3 | 28.8 | 29.4 | 31.4 | 33.6 | 26.6 | 27.2 | 29.1 | 31.1 | | | | | | |
| 85 | 1350 | S/T | 0.89 | 0.84 | 0.68 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.89 | 0.73 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.02 | 0.95 | 0.78 | 0.58 | 1.03 | 0.96 | 0.78 | 0.59 | | | | | |
| | | Delta T | 25 | 24 | 21 | 17 | 26 | 25 | 21 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 21 | 17 | 24 | 23 | 20 | 16 | | | | | |
| | | KW | 2.53 | 2.58 | 2.66 | 2.74 | 2.72 | 2.77 | 2.86 | 2.95 | 2.88 | 2.94 | 3.03 | 3.13 | 3.03 | 3.09 | 3.19 | 3.29 | 3.15 | 3.22 | 3.32 | 3.43 | 3.25 | 3.32 | 3.43 | 3.54 | | | | | |
| | | AMPS | 10.9 | 11.1 | 11.4 | 11.8 | 11.6 | 11.9 | 12.2 | 12.6 | 12.5 | 12.7 | 13.1 | 13.5 | 13.2 | 13.5 | 13.9 | 14.3 | 13.9 | 14.2 | 14.6 | 15.1 | 14.6 | 14.9 | 15.4 | 15.9 | | | | | |
| | | HIPR | 244 | 263 | 278 | 290 | 274 | 295 | 312 | 325 | 312 | 336 | 354 | 370 | 355 | 382 | 404 | 421 | 400 | 430 | 454 | 474 | 442 | 475 | 502 | 523 | | | | | |
| | 1200 | LO PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 137 | 145 | 159 | 169 | | | | | |
| | | MBh | 36.9 | 37.7 | 39.4 | 42.1 | 36.1 | 36.8 | 38.5 | 41.1 | 35.2 | 35.9 | 37.6 | 40.1 | 34.4 | 35.0 | 36.7 | 39.1 | 32.6 | 33.3 | 34.9 | 37.2 | 30.2 | 30.8 | 32.3 | 34.4 | | | | | |
| | | S/T | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.90 | 0.82 | 1.00 | 1.00 | 0.90 | 0.83 | | | | | |
| | | Delta T | 25 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 24 | 24 | 24 | 21 | 23 | 24 | 24 | 21 | 22 | 23 | 24 | 21 | 21 | 21 | 22 | 19 | | | | | |
| | | KW | 2.63 | 2.68 | 2.77 | 2.85 | 2.83 | 2.88 | 2.97 | 3.07 | 3.00 | 3.06 | 3.16 | 3.26 | 3.15 | 3.22 | 3.32 | 3.43 | 3.28 | 3.35 | 3.46 | 3.57 | 3.39 | 3.46 | 3.58 | 3.69 | | | | | |
| 1050 | AMPS | 11.3 | 11.6 | 11.9 | 12.2 | 12.1 | 12.3 | 12.7 | 13.1 | 13.0 | 13.2 | 13.6 | 14.1 | 13.7 | 14.0 | 14.4 | 14.9 | 14.5 | 14.8 | 15.2 | 15.7 | 15.2 | 15.6 | 16.0 | 16.6 | | | | | | |
| | HIPR | 257 | 277 | 292 | 305 | 288 | 310 | 328 | 342 | 328 | 353 | 373 | 389 | 374 | 402 | 425 | 443 | 420 | 452 | 478 | 498 | 464 | 500 | 528 | 550 | | | | | | |
| | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 | | | | | | |
| | MBh | 35.9 | 36.6 | 38.3 | 40.9 | 35.0 | 35.7 | 37.4 | 39.9 | 34.2 | 34.9 | 36.5 | 39.0 | 33.4 | 34.0 | 35.6 | 38.0 | 31.7 | 32.3 | 33.8 | 36.1 | 29.4 | 29.9 | 31.3 | 33.4 | | | | | | |
| | S/T | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.79 | | | | | | |
| 1050 | Delta T | 27 | 26 | 25 | 21 | 27 | 27 | 25 | 22 | 26 | 27 | 25 | 22 | 26 | 26 | 25 | 22 | 24 | 25 | 25 | 22 | 22 | 23 | 23 | 20 | | | | | | |
| | KW | 2.61 | 2.66 | 2.74 | 2.83 | 2.80 | 2.86 | 2.95 | 3.04 | 2.97 | 3.04 | 3.13 | 3.23 | 3.12 | 3.19 | 3.29 | 3.40 | 3.25 | 3.32 | 3.43 | 3.54 | 3.36 | 3.44 | 3.55 | 3.66 | | | | | | |
| | AMPS | 11.3 | 11.5 | 11.8 | 12.2 | 12.0 | 12.3 | 12.6 | 13.0 | 12.9 | 13.1 | 13.5 | 13.9 | 13.6 | 13.9 | 14.3 | 14.8 | 14.4 | 14.7 | 15.1 | 15.6 | 15.1 | 15.4 | 15.9 | 16.4 | | | | | | |
| | HIPR | 255 | 274 | 289 | 302 | 286 | 307 | 325 | 338 | 325 | 350 | 369 | 385 | 370 | 398 | 420 | 438 | 416 | 448 | 473 | 493 | 480 | 495 | 523 | 545 | | | | | | |
| | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | | | | | | |

* NOTE: Shaded area reflects A HRI rating conditions
 High and low pressures are measured at the liquid and suction access fittings.
 IDB: Entering Indoor Dry Bulb Temperature
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA 5mm Coils *PG1342***M41(B/C)*

EXPANDED PERFORMANCE DATA

COOLING OPERATION

MODEL: *PG1342***M41B*

| IDB* Airflow | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 70 | 1440 | MBh | 39.7 | 41.1 | 45.1 | - | 38.8 | 40.2 | 44.0 | - | 37.8 | 39.2 | 43.0 | - | 36.9 | 38.3 | 41.9 | - | 35.1 | 36.4 | 39.8 | - | 32.5 | 33.7 | 36.9 | - |
| | | S/T | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.87 | 0.73 | 0.50 | - | 0.88 | 0.73 | 0.51 | - |
| | | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - |
| | | KW | 2.93 | 2.99 | 3.07 | - | 3.13 | 3.20 | 3.29 | - | 3.32 | 3.38 | 3.48 | - | 3.47 | 3.55 | 3.65 | - | 3.61 | 3.69 | 3.80 | - | 3.73 | 3.81 | 3.92 | - |
| | | AMPS | 12.6 | 12.9 | 13.2 | - | 13.5 | 13.7 | 14.1 | - | 14.4 | 14.7 | 15.1 | - | 15.3 | 15.6 | 16.0 | - | 16.1 | 16.5 | 16.9 | - | 16.9 | 17.3 | 17.8 | - |
| | | LO PR | 237 | 255 | 269 | - | 266 | 286 | 302 | - | 302 | 325 | 343 | - | 344 | 370 | 391 | - | 387 | 417 | 440 | - | 428 | 460 | 486 | - |
| | 1280 | MBh | 38.5 | 39.9 | 43.8 | - | 37.6 | 39.0 | 42.7 | - | 36.7 | 38.1 | 41.7 | - | 35.8 | 37.1 | 40.7 | - | 34.1 | 35.3 | 38.7 | - | 31.5 | 32.7 | 35.8 | - |
| | | S/T | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.77 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - |
| | | Delta T | 20 | 17 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 19 | 16 | 12 | - |
| | | KW | 2.91 | 2.96 | 3.05 | - | 3.11 | 3.17 | 3.27 | - | 3.29 | 3.36 | 3.46 | - | 3.45 | 3.52 | 3.63 | - | 3.58 | 3.66 | 3.77 | - | 3.70 | 3.78 | 3.89 | - |
| | | AMPS | 12.5 | 12.8 | 13.1 | - | 13.4 | 13.6 | 14.0 | - | 14.3 | 14.6 | 15.0 | - | 15.2 | 15.5 | 15.9 | - | 16.0 | 16.3 | 16.8 | - | 16.8 | 17.2 | 17.7 | - |
| | | LO PR | 234 | 252 | 266 | - | 263 | 283 | 299 | - | 299 | 322 | 340 | - | 341 | 367 | 387 | - | 383 | 413 | 436 | - | 424 | 456 | 481 | - |
| 1125 | MBh | 35.6 | 36.9 | 40.4 | - | 34.7 | 36.0 | 39.4 | - | 33.9 | 35.1 | 38.5 | - | 33.1 | 34.3 | 37.6 | - | 31.4 | 32.6 | 35.7 | - | 29.1 | 30.2 | 33.1 | - | |
| | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | |
| | Delta T | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 19 | 17 | 13 | - | |
| | KW | 2.85 | 2.90 | 2.98 | - | 3.04 | 3.10 | 3.19 | - | 3.22 | 3.28 | 3.38 | - | 3.37 | 3.44 | 3.54 | - | 3.50 | 3.57 | 3.68 | - | 3.61 | 3.69 | 3.80 | - | |
| | AMPS | 12.3 | 12.5 | 12.8 | - | 13.1 | 13.3 | 13.7 | - | 14.0 | 14.3 | 14.7 | - | 14.8 | 15.1 | 15.5 | - | 15.6 | 15.9 | 16.4 | - | 16.4 | 16.8 | 17.2 | - | |
| | LO PR | 227 | 245 | 258 | - | 255 | 275 | 290 | - | 290 | 312 | 330 | - | 331 | 356 | 376 | - | 372 | 400 | 423 | - | 411 | 442 | 467 | - | |
| 75 | 1440 | MBh | 40.4 | 41.6 | 45.0 | 48.3 | 39.4 | 40.6 | 43.9 | 47.2 | 38.5 | 39.6 | 42.9 | 46.0 | 37.5 | 38.7 | 41.8 | 44.9 | 35.7 | 36.7 | 39.7 | 42.7 | 33.0 | 34.0 | 36.8 | 39.5 |
| | | S/T | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.92 | 0.83 | 0.62 | 0.40 | 0.95 | 0.85 | 0.65 | 0.41 | 0.99 | 0.88 | 0.67 | 0.43 | 1.00 | 0.89 | 0.68 | 0.43 |
| | | Delta T | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 |
| | | KW | 2.95 | 3.01 | 3.09 | 3.19 | 3.16 | 3.22 | 3.32 | 3.42 | 3.34 | 3.41 | 3.51 | 3.62 | 3.50 | 3.57 | 3.68 | 3.80 | 3.64 | 3.71 | 3.83 | 3.95 | 3.76 | 3.84 | 3.96 | 4.08 |
| | | AMPS | 12.7 | 13.0 | 13.3 | 13.7 | 13.6 | 13.8 | 14.2 | 14.7 | 14.6 | 14.9 | 15.3 | 15.8 | 15.4 | 15.7 | 16.2 | 16.7 | 16.2 | 16.6 | 17.1 | 17.6 | 17.1 | 17.5 | 18.0 | 18.6 |
| | | LO PR | 239 | 257 | 272 | 283 | 268 | 289 | 305 | 318 | 305 | 328 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 444 | 464 | 432 | 465 | 491 | 512 |
| | 1280 | MBh | 39.2 | 40.3 | 43.7 | 46.9 | 38.3 | 39.4 | 42.7 | 45.8 | 37.4 | 38.5 | 41.6 | 44.7 | 36.5 | 37.5 | 40.6 | 43.6 | 34.6 | 35.7 | 38.6 | 41.4 | 32.1 | 33.0 | 35.7 | 38.4 |
| | | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 |
| | | Delta T | 23 | 21 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 23 | 22 | 18 | 12 | 22 | 20 | 17 | 11 |
| | | KW | 2.93 | 2.99 | 3.07 | 3.16 | 3.14 | 3.20 | 3.29 | 3.39 | 3.32 | 3.38 | 3.48 | 3.59 | 3.48 | 3.55 | 3.65 | 3.77 | 3.61 | 3.69 | 3.80 | 3.92 | 3.73 | 3.81 | 3.92 | 4.05 |
| | | AMPS | 12.6 | 12.9 | 13.2 | 13.6 | 13.5 | 13.7 | 14.1 | 14.6 | 14.4 | 14.7 | 15.2 | 15.6 | 15.3 | 15.6 | 16.0 | 16.6 | 16.1 | 16.5 | 16.9 | 17.5 | 16.9 | 17.3 | 17.8 | 18.4 |
| | | LO PR | 237 | 255 | 269 | 281 | 266 | 286 | 302 | 315 | 302 | 325 | 343 | 358 | 344 | 370 | 391 | 408 | 387 | 417 | 440 | 459 | 428 | 460 | 486 | 507 |
| 1125 | MBh | 36.2 | 37.2 | 40.3 | 43.3 | 35.3 | 36.4 | 39.4 | 42.3 | 34.5 | 35.5 | 38.4 | 41.2 | 33.6 | 34.6 | 37.5 | 40.2 | 32.0 | 32.9 | 35.6 | 38.2 | 29.6 | 30.5 | 33.0 | 35.4 | |
| | S/T | 0.80 | 0.71 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 | |
| | Delta T | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 12 | |
| | KW | 2.87 | 2.92 | 3.00 | 3.09 | 3.07 | 3.13 | 3.22 | 3.31 | 3.24 | 3.31 | 3.40 | 3.51 | 3.40 | 3.46 | 3.57 | 3.68 | 3.53 | 3.60 | 3.71 | 3.83 | 3.64 | 3.72 | 3.83 | 3.95 | |
| | AMPS | 12.3 | 12.6 | 12.9 | 13.3 | 13.2 | 13.4 | 13.8 | 14.2 | 14.1 | 14.4 | 14.8 | 15.3 | 14.9 | 15.2 | 15.7 | 16.2 | 15.7 | 16.1 | 16.5 | 17.1 | 16.5 | 16.9 | 17.4 | 18.0 | |
| | LO PR | 230 | 247 | 261 | 272 | 258 | 277 | 293 | 306 | 293 | 315 | 333 | 347 | 334 | 359 | 379 | 396 | 376 | 404 | 427 | 445 | 415 | 447 | 472 | 492 | |

* IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 NOTE: Shaded area is ACCA (TVA) conditions
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA 5mm Coils *PG1342**M41(B/C)*

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1342***M41B*

| | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| IDB* | Airflow | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| 80 | MBh | 41.1 | 42.0 | 44.8 | 47.9 | 40.1 | 41.0 | 43.8 | 46.8 | 39.2 | 40.0 | 42.8 | 45.7 | 38.2 | 39.0 | 41.7 | 44.6 | 36.3 | 37.1 | 39.6 | 42.4 | 34.3 | 35.1 | 37.6 | 40.4 |
| | S/T | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.83 | 0.62 |
| | Delta T | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 24 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 21 | 22 | 20 | 16 |
| | KW | 2.97 | 3.03 | 3.12 | 3.21 | 3.18 | 3.24 | 3.34 | 3.44 | 3.37 | 3.43 | 3.54 | 3.65 | 3.53 | 3.60 | 3.71 | 3.83 | 3.67 | 3.74 | 3.86 | 3.98 | 3.79 | 3.87 | 3.99 | 4.11 |
| | AMPS | 12.8 | 13.1 | 13.4 | 13.8 | 13.7 | 13.9 | 14.3 | 14.8 | 14.7 | 15.0 | 15.4 | 15.9 | 15.5 | 15.8 | 16.3 | 16.8 | 16.4 | 16.7 | 17.2 | 17.8 | 17.2 | 17.6 | 18.1 | 18.7 |
| | HI PR | 242 | 260 | 275 | 286 | 271 | 292 | 308 | 321 | 308 | 332 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 470 | 496 | 517 |
| | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 147 | 156 | 133 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 |
| | MBh | 39.9 | 40.8 | 43.5 | 46.5 | 39.0 | 39.8 | 42.5 | 45.5 | 38.0 | 38.9 | 41.5 | 44.4 | 37.1 | 37.9 | 40.5 | 43.3 | 35.2 | 36.0 | 38.5 | 41.1 | 32.6 | 33.4 | 35.6 | 38.1 |
| | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 |
| | Delta T | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 25 | 25 | 22 | 17 | 23 | 23 | 20 | 16 |
| 1280 | KW | 2.95 | 3.01 | 3.10 | 3.19 | 3.16 | 3.22 | 3.32 | 3.42 | 3.34 | 3.41 | 3.51 | 3.62 | 3.50 | 3.57 | 3.68 | 3.80 | 3.64 | 3.71 | 3.83 | 3.95 | 3.76 | 3.84 | 3.96 | 4.08 |
| | AMPS | 12.7 | 13.0 | 13.3 | 13.7 | 13.6 | 13.8 | 14.2 | 14.7 | 14.6 | 14.9 | 15.3 | 15.8 | 15.4 | 15.7 | 16.2 | 16.7 | 16.2 | 16.6 | 17.1 | 17.6 | 17.1 | 17.5 | 18.0 | 18.6 |
| | HI PR | 239 | 257 | 272 | 284 | 268 | 289 | 305 | 318 | 305 | 329 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 444 | 464 | 432 | 465 | 491 | 512 |
| | LO PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 138 | 146 | 160 | 170 | 142 | 151 | 165 | 176 |
| | MBh | 36.8 | 37.6 | 40.2 | 43.0 | 36.0 | 36.7 | 39.3 | 42.0 | 35.1 | 35.9 | 38.3 | 41.0 | 34.2 | 35.0 | 37.4 | 40.0 | 32.5 | 33.2 | 35.5 | 38.0 | 30.1 | 30.8 | 32.9 | 35.2 |
| | S/T | 0.88 | 0.82 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.01 | 0.94 | 0.77 | 0.57 |
| | Delta T | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 25 | 22 | 18 | 25 | 24 | 21 | 16 |
| | KW | 2.89 | 2.94 | 3.03 | 3.12 | 3.09 | 3.15 | 3.24 | 3.34 | 3.27 | 3.33 | 3.43 | 3.53 | 3.42 | 3.49 | 3.60 | 3.71 | 3.55 | 3.63 | 3.74 | 3.86 | 3.67 | 3.75 | 3.86 | 3.98 |
| | AMPS | 12.4 | 12.7 | 13.0 | 13.4 | 13.3 | 13.5 | 13.9 | 14.3 | 14.2 | 14.5 | 14.9 | 15.4 | 15.0 | 15.3 | 15.8 | 16.3 | 15.9 | 16.2 | 16.7 | 17.2 | 16.7 | 17.0 | 17.5 | 18.1 |
| | HI PR | 232 | 250 | 264 | 275 | 260 | 280 | 296 | 309 | 296 | 319 | 336 | 351 | 337 | 363 | 383 | 400 | 379 | 408 | 431 | 450 | 419 | 451 | 476 | 497 |
| LO PR | 110 | 117 | 128 | 137 | 117 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 171 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 85 | MBh | 41.8 | 42.6 | 44.6 | 47.6 | 40.8 | 41.6 | 43.6 | 46.5 | 39.9 | 40.6 | 42.5 | 45.4 | 38.9 | 39.6 | 41.5 | 44.3 | 36.9 | 37.6 | 39.4 | 42.1 | 34.2 | 34.9 | 36.5 | 39.0 |
| | S/T | 1.00 | 0.96 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.81 |
| | Delta T | 27 | 26 | 25 | 21 | 26 | 27 | 25 | 22 | 25 | 26 | 25 | 22 | 25 | 25 | 25 | 22 | 24 | 24 | 25 | 22 | 22 | 22 | 23 | 20 |
| | KW | 2.99 | 3.05 | 3.14 | 3.23 | 3.21 | 3.27 | 3.37 | 3.47 | 3.39 | 3.46 | 3.57 | 3.68 | 3.56 | 3.63 | 3.74 | 3.86 | 3.70 | 3.77 | 3.89 | 4.01 | 3.82 | 3.90 | 4.02 | 4.15 |
| | AMPS | 12.9 | 13.2 | 13.5 | 13.9 | 13.8 | 14.1 | 14.4 | 14.9 | 14.8 | 15.1 | 15.5 | 16.0 | 15.6 | 16.0 | 16.4 | 17.0 | 16.5 | 16.9 | 17.4 | 17.9 | 17.4 | 17.7 | 18.3 | 18.9 |
| | HI PR | 244 | 263 | 277 | 289 | 274 | 295 | 311 | 325 | 311 | 335 | 354 | 369 | 355 | 382 | 403 | 420 | 399 | 429 | 453 | 473 | 441 | 474 | 501 | 523 |
| | LO PR | 116 | 124 | 135 | 144 | 123 | 130 | 142 | 152 | 127 | 136 | 148 | 158 | 134 | 142 | 156 | 166 | 140 | 149 | 163 | 174 | 145 | 154 | 169 | 180 |
| | MBh | 40.6 | 41.4 | 43.3 | 46.2 | 39.6 | 40.4 | 42.3 | 45.1 | 38.7 | 39.4 | 41.3 | 44.1 | 37.7 | 38.5 | 40.3 | 43.0 | 35.9 | 36.6 | 38.3 | 40.8 | 33.2 | 33.9 | 35.5 | 37.8 |
| | S/T | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 |
| | Delta T | 28 | 27 | 26 | 22 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 27 | 28 | 26 | 23 | 26 | 26 | 26 | 22 | 24 | 24 | 24 | 21 |
| 1280 | KW | 2.97 | 3.03 | 3.12 | 3.21 | 3.18 | 3.24 | 3.34 | 3.44 | 3.37 | 3.43 | 3.54 | 3.65 | 3.53 | 3.60 | 3.71 | 3.83 | 3.67 | 3.74 | 3.86 | 3.98 | 3.79 | 3.87 | 3.99 | 4.11 |
| | AMPS | 12.8 | 13.1 | 13.4 | 13.8 | 13.7 | 13.9 | 14.3 | 14.8 | 14.7 | 15.0 | 15.4 | 15.9 | 15.5 | 15.8 | 16.3 | 16.8 | 16.4 | 16.7 | 17.2 | 17.8 | 17.2 | 17.6 | 18.1 | 18.7 |
| | HI PR | 242 | 260 | 275 | 286 | 271 | 292 | 308 | 321 | 308 | 332 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 470 | 496 | 517 |
| | LO PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 147 | 156 | 133 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 |
| | MBh | 37.5 | 38.2 | 40.0 | 42.7 | 36.6 | 37.3 | 39.1 | 41.7 | 35.7 | 36.4 | 38.1 | 40.7 | 34.8 | 35.5 | 37.2 | 39.7 | 33.1 | 33.7 | 35.3 | 37.7 | 30.7 | 31.3 | 32.7 | 34.9 |
| | S/T | 0.92 | 0.89 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.92 | 0.74 |
| | Delta T | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 27 | 23 | 27 | 28 | 26 | 23 | 25 | 26 | 25 | 21 |
| | KW | 2.91 | 2.96 | 3.05 | 3.14 | 3.11 | 3.17 | 3.27 | 3.36 | 3.29 | 3.36 | 3.46 | 3.56 | 3.45 | 3.52 | 3.62 | 3.74 | 3.58 | 3.66 | 3.77 | 3.89 | 3.70 | 3.77 | 3.89 | 4.01 |
| | AMPS | 12.5 | 12.8 | 13.1 | 13.5 | 13.4 | 13.6 | 14.0 | 14.4 | 14.3 | 14.6 | 15.0 | 15.5 | 15.2 | 15.5 | 15.9 | 16.4 | 16.0 | 16.3 | 16.8 | 17.4 | 16.8 | 17.2 | 17.7 | 18.3 |
| | HI PR | 234 | 252 | 266 | 278 | 263 | 283 | 299 | 312 | 299 | 322 | 340 | 354 | 341 | 367 | 387 | 404 | 383 | 412 | 435 | 454 | 423 | 456 | 481 | 502 |
| LO PR | 111 | 119 | 129 | 138 | 118 | 125 | 137 | 146 | 122 | 130 | 142 | 151 | 129 | 137 | 149 | 159 | 135 | 143 | 157 | 167 | 139 | 148 | 162 | 172 | |

* NOTE: Shaded area reflects A HRI rating conditions
 High and low pressures are measured at the liquid and suction access fittings.
 IDB: Entering Indoor Dry Bulb Temperature
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)
 KW = Total system power

COOLING PERFORMANCE DATA 5mm Coils *PG348***M41(B/C/D)*

EXPANDED PERFORMANCE DATA

COOLING OPERATION

MODEL: *PG1348***M41B*

| IDB* | Air flow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|----------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|
| | | 65 | | | | | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | |
| | | 59 | 63 | 67 | 71 | 75 | 79 | 59 | 63 | 67 | 71 | 75 | 79 | 59 | 63 | 67 | 71 | 75 | 79 | 59 | 63 | 67 | 71 | 75 | 79 | 59 | 63 | 67 | 71 | 75 | 79 | 59 | 63 | 67 | 71 | 75 | 79 |
| 70 | 1700 | MBh | 45.4 | 47.0 | 51.5 | - | 44.3 | 45.9 | 50.3 | - | 43.3 | 44.9 | 49.1 | - | 42.2 | 43.8 | 47.9 | - | 40.1 | 41.6 | 45.5 | - | 0.89 | 0.74 | 0.51 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | |
| | | S/T | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.50 | - | 0.89 | 0.74 | 0.51 | - | 0.89 | 0.74 | 0.51 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | |
| | | Delta T | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | | | |
| | | KW | 3.28 | 3.34 | 3.44 | - | 3.51 | 3.58 | 3.68 | - | 3.71 | 3.79 | 3.90 | - | 3.89 | 3.97 | 4.09 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | 4.04 | 4.13 | 4.25 | - | 4.17 | 4.26 | 4.39 | - | | | |
| | | AMPS | 15.9 | 16.2 | 16.6 | - | 16.9 | 17.2 | 17.6 | - | 17.9 | 18.3 | 18.7 | - | 18.9 | 19.2 | 19.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | 19.8 | 20.2 | 20.7 | - | 20.7 | 21.1 | 21.7 | - | | | |
| | | HI PR | 241 | 259 | 274 | - | 270 | 291 | 307 | - | 308 | 331 | 349 | - | 350 | 377 | 398 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | 394 | 424 | 448 | - | 435 | 468 | 495 | - | | | |
| | 1520 | LO PR | 115 | 123 | 134 | - | 122 | 129 | 141 | - | 126 | 135 | 147 | - | 133 | 141 | 154 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | 139 | 148 | 162 | - | 144 | 153 | 167 | - | | | |
| | | MBh | 44.7 | 46.3 | 50.8 | - | 43.7 | 45.3 | 49.6 | - | 42.6 | 44.2 | 48.4 | - | 41.6 | 43.1 | 47.2 | - | 39.5 | 41.0 | 44.9 | - | 36.6 | 37.9 | 41.6 | - | 39.5 | 41.0 | 44.9 | - | 36.6 | 37.9 | 41.6 | - | | | |
| | | S/T | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.65 | 0.45 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.85 | 0.71 | 0.49 | - | 0.86 | 0.72 | 0.50 | - | 0.85 | 0.71 | 0.49 | - | 0.86 | 0.72 | 0.50 | - | | | |
| | | Delta T | 20 | 17 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 19 | 16 | 12 | - | 20 | 18 | 13 | - | 19 | 16 | 12 | - | | | |
| | | KW | 3.26 | 3.32 | 3.42 | - | 3.49 | 3.56 | 3.66 | - | 3.69 | 3.77 | 3.88 | - | 3.87 | 3.95 | 4.07 | - | 4.02 | 4.10 | 4.23 | - | 4.15 | 4.24 | 4.37 | - | 4.02 | 4.10 | 4.23 | - | 4.15 | 4.24 | 4.37 | - | | | |
| | | AMPS | 15.9 | 16.1 | 16.5 | - | 16.8 | 17.1 | 17.5 | - | 17.9 | 18.2 | 18.6 | - | 18.8 | 19.1 | 19.6 | - | 19.7 | 20.1 | 20.6 | - | 20.6 | 21.0 | 21.6 | - | 19.7 | 20.1 | 20.6 | - | 20.6 | 21.0 | 21.6 | - | | | |
| 75 | 1700 | MBh | 46.2 | 47.5 | 51.4 | 55.2 | 45.1 | 46.4 | 50.2 | 53.9 | 44.0 | 45.3 | 49.0 | 52.6 | 42.9 | 44.2 | 47.8 | 51.4 | 40.8 | 42.0 | 45.5 | 48.8 | 37.8 | 38.9 | 42.1 | 45.2 | 40.8 | 42.0 | 45.5 | 48.8 | 37.8 | 38.9 | 42.1 | 45.2 | | | |
| | | S/T | 0.89 | 0.79 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.97 | 0.87 | 0.66 | 0.42 | 1.00 | 0.90 | 0.68 | 0.44 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.90 | 0.68 | 0.44 | 1.00 | 0.91 | 0.69 | 0.44 | | | |
| | | Delta T | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 20 | 19 | 16 | 11 | | | |
| | | KW | 3.30 | 3.37 | 3.46 | 3.57 | 3.53 | 3.60 | 3.71 | 3.82 | 3.74 | 3.82 | 3.93 | 4.05 | 3.92 | 4.00 | 4.12 | 4.25 | 4.07 | 4.16 | 4.29 | 4.42 | 4.21 | 4.29 | 4.43 | 4.57 | 4.21 | 4.29 | 4.42 | 4.57 | 4.21 | 4.29 | 4.43 | 4.57 | | | |
| | | AMPS | 16.0 | 16.3 | 16.7 | 17.2 | 17.0 | 17.3 | 17.7 | 18.2 | 18.1 | 18.4 | 18.9 | 19.4 | 19.0 | 19.4 | 19.9 | 20.5 | 20.0 | 20.3 | 20.9 | 21.5 | 20.9 | 21.3 | 21.9 | 22.6 | 20.9 | 21.3 | 21.9 | 22.6 | 20.9 | 21.3 | 21.9 | 22.6 | | | |
| | | HI PR | 243 | 262 | 277 | 289 | 273 | 294 | 310 | 324 | 311 | 334 | 353 | 368 | 354 | 381 | 402 | 419 | 398 | 428 | 452 | 472 | 440 | 473 | 500 | 521 | 398 | 428 | 452 | 472 | 440 | 473 | 500 | 521 | | | |
| | 1520 | LO PR | 116 | 124 | 135 | 144 | 123 | 131 | 143 | 152 | 128 | 136 | 148 | 158 | 134 | 143 | 156 | 166 | 141 | 150 | 163 | 174 | 145 | 155 | 169 | 180 | 141 | 150 | 163 | 174 | 145 | 155 | 169 | 180 | | | |
| | | MBh | 45.5 | 46.8 | 50.7 | 54.4 | 44.4 | 45.7 | 49.5 | 53.1 | 43.4 | 44.6 | 48.3 | 51.9 | 42.3 | 43.6 | 47.1 | 50.6 | 40.2 | 41.4 | 44.8 | 48.1 | 37.2 | 38.3 | 41.5 | 44.5 | 40.2 | 41.4 | 44.8 | 48.1 | 37.2 | 38.3 | 41.5 | 44.5 | | | |
| | | S/T | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.97 | 0.87 | 0.65 | 0.42 | 0.98 | 0.87 | 0.66 | 0.42 | 0.97 | 0.87 | 0.65 | 0.42 | 0.98 | 0.87 | 0.66 | 0.42 | | | |
| | | Delta T | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 11 | | | |
| | | KW | 3.29 | 3.35 | 3.45 | 3.55 | 3.52 | 3.59 | 3.69 | 3.80 | 3.72 | 3.79 | 3.91 | 4.03 | 3.90 | 3.98 | 4.10 | 4.23 | 4.05 | 4.14 | 4.26 | 4.40 | 4.18 | 4.27 | 4.40 | 4.54 | 4.18 | 4.27 | 4.40 | 4.54 | 4.18 | 4.27 | 4.40 | 4.54 | | | |
| | | AMPS | 16.0 | 16.2 | 16.6 | 17.1 | 16.9 | 17.2 | 17.6 | 18.1 | 18.0 | 18.3 | 18.8 | 19.3 | 18.9 | 19.3 | 19.8 | 20.4 | 19.9 | 20.2 | 20.8 | 21.4 | 20.8 | 21.2 | 21.8 | 22.4 | 20.8 | 21.2 | 21.8 | 22.4 | 20.8 | 21.2 | 21.8 | 22.4 | | | |
| 1330 | HI PR | 242 | 260 | 275 | 287 | 271 | 292 | 308 | 321 | 308 | 332 | 351 | 366 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 437 | 470 | 496 | 518 | 395 | 425 | 449 | 468 | 437 | 470 | 496 | 518 | | | | |
| | LO PR | 116 | 123 | 134 | 143 | 122 | 130 | 142 | 151 | 127 | 135 | 147 | 157 | 133 | 142 | 155 | 165 | 140 | 149 | 162 | 173 | 144 | 154 | 168 | 179 | 140 | 149 | 162 | 173 | 144 | 154 | 168 | 179 | | | | |
| | MBh | 42.0 | 43.2 | 46.8 | 50.2 | 41.0 | 42.2 | 45.7 | 49.0 | 40.0 | 41.2 | 44.6 | 47.9 | 39.0 | 40.2 | 43.5 | 46.7 | 37.1 | 38.2 | 41.3 | 44.4 | 34.4 | 35.4 | 38.3 | 41.1 | 37.1 | 38.2 | 41.3 | 44.4 | 34.4 | 35.4 | 38.3 | 41.1 | | | | |
| | S/T | 0.82 | 0.73 | 0.55 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 | 0.93 | 0.83 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 | | | | |
| | Delta T | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 12 | | | | |
| | KW | 3.21 | 3.28 | 3.37 | 3.47 | 3.44 | 3.51 | 3.61 | 3.72 | 3.64 | 3.71 | 3.82 | 3.94 | 3.81 | 3.89 | 4.00 | 4.13 | 3.96 | 4.04 | 4.16 | 4.29 | 4.09 | 4.17 | 4.30 | 4.43 | 4.09 | 4.17 | 4.30 | 4.43 | 4.09 | 4.17 | 4.30 | 4.43 | | | | |

* NOTE: Shaded area is A OCA (TVA) conditions
 High and low pressures are measured at the liquid and suction access fittings.
 IDB: Entering Indoor Dry Bulb Temperature
 AMP: Unit amps (comp.+ evaporator + condenser fan motors)
 KW = Total system power

EXPANDED PERFORMANCE DATA

COOLING OPERATION

COOLING PERFORMANCE DATA 5mm Coils*PG1348***M41(B/C/D)*

| | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | |
| IDB* | Airflow | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | |
| 80 | 1700 | MBh | 47.0 | 48.0 | 51.3 | 54.8 | 45.9 | 46.9 | 50.1 | 53.5 | 44.8 | 45.8 | 48.9 | 52.3 | 43.7 | 44.7 | 47.7 | 51.0 | 41.5 | 42.4 | 45.3 | 48.4 | 38.5 | 39.3 | 42.0 | 44.9 |
| | Delta T | 0.97 | 0.91 | 0.74 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.85 | 0.63 | 1.00 | 1.00 | 0.85 | 0.64 | |
| | KW | 3.33 | 3.39 | 3.49 | 3.59 | 3.56 | 3.63 | 3.74 | 3.85 | 3.77 | 3.84 | 3.96 | 4.08 | 3.95 | 4.03 | 4.16 | 4.29 | 4.11 | 4.19 | 4.32 | 4.46 | 4.24 | 4.33 | 4.46 | 4.61 | |
| | AMPS | 16.1 | 16.4 | 16.8 | 17.3 | 17.1 | 17.4 | 17.8 | 18.3 | 18.2 | 18.5 | 19.0 | 19.6 | 19.2 | 19.5 | 20.0 | 20.6 | 20.1 | 20.5 | 21.0 | 21.7 | 21.1 | 21.5 | 22.0 | 22.7 | |
| | HI PR | 246 | 265 | 279 | 291 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 357 | 385 | 406 | 424 | 402 | 433 | 457 | 477 | 444 | 478 | 505 | 527 | |
| | LO PR | 118 | 125 | 137 | 145 | 124 | 132 | 144 | 154 | 129 | 137 | 150 | 160 | 136 | 144 | 157 | 168 | 142 | 151 | 165 | 176 | 147 | 156 | 171 | 182 | |
| | MBh | 46.3 | 47.3 | 50.5 | 54.0 | 45.2 | 46.2 | 49.4 | 52.8 | 44.1 | 45.1 | 48.2 | 51.5 | 43.1 | 44.0 | 47.0 | 50.2 | 40.9 | 41.8 | 44.7 | 47.7 | 37.9 | 38.7 | 41.4 | 44.2 | |
| | Delta T | 0.93 | 0.87 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.56 | 1.00 | 0.96 | 0.78 | 0.58 | 1.00 | 0.99 | 0.81 | 0.61 | 1.00 | 1.00 | 0.82 | 0.61 | |
| | KW | 3.31 | 3.37 | 3.47 | 3.57 | 3.54 | 3.61 | 3.72 | 3.83 | 3.75 | 3.82 | 3.94 | 4.06 | 3.93 | 4.01 | 4.13 | 4.26 | 4.08 | 4.17 | 4.30 | 4.43 | 4.22 | 4.31 | 4.44 | 4.58 | |
| | AMPS | 16.1 | 16.3 | 16.7 | 17.2 | 17.0 | 17.3 | 17.7 | 18.2 | 18.1 | 18.4 | 18.9 | 19.5 | 19.1 | 19.4 | 19.9 | 20.5 | 20.0 | 20.4 | 20.9 | 21.6 | 20.9 | 21.4 | 21.9 | 22.6 | |
| HI PR | 244 | 263 | 277 | 289 | 274 | 295 | 311 | 325 | 312 | 335 | 354 | 369 | 355 | 382 | 403 | 421 | 399 | 430 | 454 | 473 | 441 | 475 | 501 | 523 | | |
| LO PR | 117 | 124 | 136 | 144 | 123 | 131 | 143 | 153 | 128 | 136 | 149 | 159 | 135 | 143 | 156 | 167 | 141 | 150 | 164 | 175 | 146 | 155 | 169 | 180 | | |
| 1330 | MBh | 42.7 | 43.6 | 46.6 | 49.9 | 41.7 | 42.6 | 45.6 | 48.7 | 40.7 | 41.6 | 44.5 | 47.5 | 39.7 | 40.6 | 43.4 | 46.4 | 37.8 | 38.6 | 41.2 | 44.1 | 35.0 | 35.7 | 38.2 | 40.8 | |
| Delta T | 0.90 | 0.84 | 0.69 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.90 | 0.73 | 0.54 | 0.99 | 0.92 | 0.75 | 0.56 | 1.02 | 0.96 | 0.78 | 0.58 | 1.03 | 0.97 | 0.79 | 0.59 | | |
| KW | 3.24 | 3.30 | 3.39 | 3.49 | 3.46 | 3.53 | 3.64 | 3.74 | 3.66 | 3.74 | 3.85 | 3.97 | 3.84 | 3.92 | 4.04 | 4.16 | 3.99 | 4.07 | 4.20 | 4.33 | 4.12 | 4.20 | 4.33 | 4.47 | | |
| AMPS | 15.7 | 16.0 | 16.4 | 16.8 | 16.7 | 17.0 | 17.4 | 17.9 | 17.7 | 18.1 | 18.5 | 19.0 | 18.7 | 19.0 | 19.5 | 20.1 | 19.6 | 19.9 | 20.5 | 21.1 | 20.5 | 20.9 | 21.4 | 22.1 | | |
| HI PR | 237 | 255 | 269 | 281 | 266 | 286 | 302 | 315 | 302 | 325 | 343 | 358 | 344 | 370 | 391 | 408 | 387 | 417 | 440 | 459 | 428 | 460 | 486 | 507 | | |
| LO PR | 113 | 120 | 131 | 140 | 120 | 127 | 139 | 148 | 124 | 132 | 144 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 169 | 142 | 151 | 164 | 175 | | |
| 85 | 1700 | MBh | 47.8 | 48.7 | 51.0 | 54.4 | 46.7 | 47.6 | 49.8 | 53.2 | 45.6 | 46.5 | 48.7 | 51.9 | 44.5 | 45.3 | 47.5 | 50.6 | 42.2 | 43.1 | 45.1 | 48.1 | 39.1 | 39.9 | 41.8 | 44.6 |
| | Delta T | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.94 | 0.77 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 1.00 | 0.82 | 1.00 | 1.00 | 1.00 | 0.83 | |
| | KW | 3.35 | 3.42 | 3.52 | 3.62 | 3.59 | 3.66 | 3.77 | 3.88 | 3.80 | 3.87 | 3.99 | 4.11 | 3.98 | 4.06 | 4.19 | 4.32 | 4.14 | 4.22 | 4.36 | 4.49 | 4.27 | 4.36 | 4.50 | 4.64 | |
| | AMPS | 16.2 | 16.5 | 16.9 | 17.4 | 17.2 | 17.5 | 18.0 | 18.5 | 18.3 | 18.7 | 19.1 | 19.7 | 19.3 | 19.7 | 20.2 | 20.8 | 20.3 | 20.6 | 21.2 | 21.8 | 21.2 | 21.6 | 22.2 | 22.9 | |
| | HI PR | 248 | 267 | 282 | 294 | 279 | 300 | 317 | 330 | 317 | 341 | 360 | 376 | 361 | 388 | 410 | 428 | 406 | 437 | 461 | 481 | 449 | 483 | 510 | 532 | |
| | LO PR | 119 | 126 | 138 | 147 | 125 | 133 | 146 | 155 | 130 | 139 | 151 | 161 | 137 | 146 | 159 | 169 | 143 | 153 | 167 | 177 | 148 | 158 | 172 | 184 | |
| | MBh | 47.1 | 48.0 | 50.3 | 53.6 | 46.0 | 46.9 | 49.1 | 52.4 | 44.9 | 45.8 | 47.9 | 51.1 | 43.8 | 44.7 | 46.8 | 49.9 | 41.6 | 42.4 | 44.4 | 47.4 | 38.5 | 39.3 | 41.2 | 43.9 | |
| | Delta T | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.79 | |
| | KW | 3.33 | 3.40 | 3.50 | 3.60 | 3.57 | 3.64 | 3.75 | 3.86 | 3.78 | 3.85 | 3.97 | 4.09 | 3.96 | 4.04 | 4.17 | 4.30 | 4.12 | 4.20 | 4.33 | 4.47 | 4.25 | 4.34 | 4.47 | 4.62 | |
| | AMPS | 16.2 | 16.5 | 16.8 | 17.3 | 17.1 | 17.4 | 17.9 | 18.4 | 18.2 | 18.6 | 19.0 | 19.6 | 19.2 | 19.6 | 20.1 | 20.7 | 20.2 | 20.5 | 21.1 | 21.7 | 21.1 | 21.5 | 22.1 | 22.8 | |
| HI PR | 247 | 265 | 280 | 292 | 277 | 298 | 314 | 328 | 315 | 339 | 358 | 373 | 358 | 386 | 407 | 425 | 403 | 434 | 458 | 478 | 446 | 479 | 506 | 528 | | |
| LO PR | 118 | 125 | 137 | 146 | 125 | 132 | 145 | 154 | 129 | 138 | 150 | 160 | 136 | 145 | 158 | 168 | 142 | 152 | 165 | 176 | 147 | 157 | 171 | 182 | | |
| 1330 | MBh | 43.5 | 44.3 | 46.4 | 49.5 | 42.5 | 43.3 | 45.3 | 48.4 | 41.4 | 42.2 | 44.2 | 47.2 | 40.4 | 41.2 | 43.2 | 46.0 | 38.4 | 39.2 | 41.0 | 43.7 | 35.6 | 36.3 | 38.0 | 40.5 | |
| Delta T | 0.94 | 0.91 | 0.82 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.94 | 0.76 | | |
| KW | 3.26 | 3.32 | 3.42 | 3.52 | 3.49 | 3.56 | 3.66 | 3.77 | 3.69 | 3.76 | 3.88 | 4.00 | 3.87 | 3.95 | 4.07 | 4.19 | 4.02 | 4.10 | 4.23 | 4.36 | 4.15 | 4.24 | 4.37 | 4.51 | | |
| AMPS | 15.8 | 16.1 | 16.5 | 17.0 | 16.8 | 17.1 | 17.5 | 18.0 | 17.9 | 18.2 | 18.6 | 19.2 | 18.8 | 19.1 | 19.6 | 20.2 | 19.7 | 20.1 | 20.6 | 21.2 | 20.6 | 21.0 | 21.6 | 22.3 | | |
| HI PR | 239 | 257 | 272 | 284 | 268 | 289 | 305 | 318 | 305 | 329 | 347 | 362 | 348 | 374 | 395 | 412 | 391 | 421 | 445 | 464 | 432 | 465 | 491 | 512 | | |
| LO PR | 114 | 122 | 133 | 141 | 121 | 129 | 140 | 149 | 126 | 134 | 146 | 155 | 132 | 140 | 153 | 163 | 138 | 147 | 161 | 171 | 143 | 152 | 166 | 177 | | |

* NOTE: Shaded area reflects AHRl rating conditions
 High and low pressures are measured at the liquid and suction access fittings.
 IDB: Entering Indoor Dry Bulb Temperature
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA 5mm Coils *PG1360**M41(B/C/D)*

EXPANDED PERFORMANCE DATA

EXPANDED PERFORMANCE DATA

MODEL: *PG1360***M41B*

| | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|--------------------------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| | | 65 | | | | | 75 | | | | | 85 | | | | | 95 | | | | | 105 | | | | | 115 | | | | | | | |
| IDB* | Airflow | 59 | 63 | 67 | 71 | 71 | 59 | 63 | 67 | 71 | 71 | 59 | 63 | 67 | 71 | 71 | 59 | 63 | 67 | 71 | 71 | 59 | 63 | 67 | 71 | 71 | 59 | 63 | 67 | 71 | 71 | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | 2035 | MBh | 56.3 | 58.4 | 64.0 | - | 55.0 | 57.0 | 62.5 | - | 53.7 | 55.7 | 61.0 | - | 52.4 | 54.3 | 59.5 | - | 49.8 | 51.6 | 56.5 | - | 46.1 | 47.8 | 52.4 | - | 46.1 | 47.8 | 52.4 | - | 46.1 | 47.8 | 52.4 | - |
| | | S/T | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | 0.87 | 0.73 | 0.50 | - | 0.88 | 0.73 | 0.51 | - | 0.88 | 0.73 | 0.51 | - | 0.88 | 0.73 | 0.51 | - |
| | | Delta T | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - |
| | | KW | 4.26 | 4.35 | 4.48 | - | 4.57 | 4.66 | 4.80 | - | 4.84 | 4.94 | 5.09 | - | 5.08 | 5.18 | 5.34 | - | 5.28 | 5.39 | 5.56 | - | 5.45 | 5.57 | 5.75 | - | 5.45 | 5.57 | 5.75 | - | 5.45 | 5.57 | 5.75 | - |
| | | AMPS | 18.0 | 18.4 | 18.9 | - | 19.2 | 19.6 | 20.2 | - | 20.7 | 21.1 | 21.7 | - | 21.9 | 22.3 | 23.0 | - | 23.1 | 23.6 | 24.3 | - | 24.3 | 24.9 | 25.6 | - | 24.3 | 24.9 | 25.6 | - | 24.3 | 24.9 | 25.6 | - |
| | | HI PR | 241 | 260 | 274 | - | 271 | 291 | 308 | - | 308 | 331 | 350 | - | 351 | 377 | 399 | - | 395 | 425 | 448 | - | 436 | 469 | 495 | - | 436 | 469 | 495 | - | 436 | 469 | 495 | - |
| | | LO PR | 109 | 116 | 127 | - | 115 | 123 | 134 | - | 120 | 127 | 139 | - | 126 | 134 | 146 | - | 132 | 140 | 153 | - | 136 | 145 | 158 | - | 136 | 145 | 158 | - | 136 | 145 | 158 | - |
| | | MBh | 54.7 | 56.7 | 62.1 | - | 53.4 | 55.4 | 60.7 | - | 52.2 | 54.1 | 59.2 | - | 50.9 | 52.7 | 57.8 | - | 48.3 | 50.1 | 54.9 | - | 44.8 | 46.4 | 50.9 | - | 44.8 | 46.4 | 50.9 | - | 44.8 | 46.4 | 50.9 | - |
| | | S/T | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | 0.84 | 0.70 | 0.48 | - | 0.84 | 0.70 | 0.48 | - |
| 1810 | | Delta T | 20 | 18 | 13 | - | 21 | 18 | 13 | - | 21 | 18 | 13 | - | 21 | 18 | 14 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - |
| | | KW | 4.23 | 4.32 | 4.44 | - | 4.53 | 4.63 | 4.77 | - | 4.80 | 4.90 | 5.05 | - | 5.04 | 5.14 | 5.30 | - | 5.24 | 5.35 | 5.52 | - | 5.41 | 5.53 | 5.70 | - | 5.41 | 5.53 | 5.70 | - | 5.41 | 5.53 | 5.70 | - |
| | | AMPS | 17.9 | 18.2 | 18.7 | - | 19.1 | 19.5 | 20.0 | - | 20.5 | 20.9 | 21.5 | - | 21.7 | 22.2 | 22.8 | - | 22.9 | 23.4 | 24.1 | - | 24.1 | 24.7 | 25.4 | - | 24.1 | 24.7 | 25.4 | - | 24.1 | 24.7 | 25.4 | - |
| | | HI PR | 239 | 257 | 272 | - | 268 | 289 | 305 | - | 305 | 328 | 346 | - | 347 | 374 | 395 | - | 391 | 420 | 444 | - | 432 | 465 | 491 | - | 432 | 465 | 491 | - | 432 | 465 | 491 | - |
| | | LO PR | 108 | 115 | 125 | - | 114 | 121 | 132 | - | 119 | 126 | 138 | - | 125 | 132 | 145 | - | 131 | 139 | 152 | - | 135 | 144 | 157 | - | 135 | 144 | 157 | - | 135 | 144 | 157 | - |
| | | MBh | 50.5 | 52.3 | 57.3 | - | 49.3 | 51.1 | 56.0 | - | 48.1 | 49.9 | 54.7 | - | 47.0 | 48.7 | 53.3 | - | 44.6 | 46.2 | 50.7 | - | 41.3 | 42.8 | 46.9 | - | 41.3 | 42.8 | 46.9 | - | 41.3 | 42.8 | 46.9 | - |
| | | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | 0.81 | 0.67 | 0.47 | - | 0.81 | 0.67 | 0.47 | - |
| | | Delta T | 21 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - | 21 | 18 | 14 | - |
| | | KW | 4.14 | 4.22 | 4.34 | - | 4.43 | 4.52 | 4.66 | - | 4.69 | 4.79 | 4.93 | - | 4.92 | 5.02 | 5.18 | - | 5.11 | 5.22 | 5.38 | - | 5.28 | 5.39 | 5.56 | - | 5.28 | 5.39 | 5.56 | - | 5.28 | 5.39 | 5.56 | - |
| 1590 | | AMPS | 17.5 | 17.8 | 18.3 | - | 18.6 | 19.0 | 19.6 | - | 20.0 | 20.4 | 21.0 | - | 21.2 | 21.6 | 22.3 | - | 22.4 | 22.8 | 23.5 | - | 23.5 | 24.0 | 24.8 | - | 23.5 | 24.0 | 24.8 | - | 23.5 | 24.0 | 24.8 | - |
| | | HI PR | 232 | 249 | 263 | - | 260 | 280 | 296 | - | 296 | 318 | 336 | - | 337 | 363 | 383 | - | 379 | 408 | 431 | - | 419 | 451 | 476 | - | 419 | 451 | 476 | - | 419 | 451 | 476 | - |
| | | LO PR | 105 | 111 | 122 | - | 111 | 118 | 129 | - | 115 | 122 | 134 | - | 121 | 129 | 140 | - | 127 | 135 | 147 | - | 131 | 139 | 152 | - | 131 | 139 | 152 | - | 131 | 139 | 152 | - |
| | 75 | 2035 | MBh | 57.3 | 59.0 | 63.9 | 68.5 | 56.0 | 57.6 | 62.4 | 66.9 | 54.6 | 56.3 | 60.9 | 65.3 | 53.3 | 54.9 | 59.4 | 63.8 | 50.6 | 52.1 | 56.4 | 60.6 | 46.9 | 48.3 | 52.3 | 56.1 | 46.9 | 48.3 | 52.3 | 56.1 | | | |
| | | | S/T | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.92 | 0.83 | 0.63 | 0.40 | 0.95 | 0.85 | 0.65 | 0.42 | 0.99 | 0.89 | 0.67 | 0.43 | 1.00 | 0.89 | 0.68 | 0.43 | 1.00 | 0.89 | 0.68 | 0.43 | | | |
| | | | Delta T | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | | | |
| | | | KW | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.22 | 5.39 | 5.56 | 5.32 | 5.43 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | 5.50 | 5.62 | 5.79 | 5.98 | | | |
| | | | AMPS | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | 24.5 | 25.1 | 25.8 | 26.7 | | | |
| | | | HI PR | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 354 | 381 | 403 | 420 | 399 | 429 | 453 | 472 | 440 | 474 | 501 | 522 | 440 | 474 | 501 | 522 | | | |
| | | LO PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 170 | 138 | 147 | 160 | 170 | | | | |
| | | MBh | 55.6 | 57.3 | 62.0 | 66.5 | 54.3 | 55.9 | 60.6 | 65.0 | 53.0 | 54.6 | 59.1 | 63.4 | 51.8 | 53.3 | 57.7 | 61.9 | 49.2 | 50.6 | 54.8 | 58.8 | 45.5 | 46.9 | 50.8 | 54.5 | 45.5 | 46.9 | 50.8 | 54.5 | | | | |
| | | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 | | | | |
| 1810 | | Delta T | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 11 | 24 | 22 | 18 | 11 | | | | |
| | | KW | 4.26 | 4.35 | 4.48 | 4.61 | 4.57 | 4.66 | 4.80 | 4.95 | 4.84 | 4.94 | 5.09 | 5.25 | 5.08 | 5.18 | 5.35 | 5.51 | 5.28 | 5.39 | 5.56 | 5.74 | 5.46 | 5.57 | 5.75 | 5.93 | 5.46 | 5.57 | 5.75 | 5.93 | | | | |
| | | AMPS | 18.0 | 18.4 | 18.9 | 19.5 | 19.2 | 19.6 | 20.2 | 20.8 | 20.7 | 21.1 | 21.7 | 22.4 | 21.9 | 22.4 | 23.0 | 23.8 | 23.1 | 23.6 | 24.3 | 25.1 | 24.3 | 24.9 | 25.6 | 26.5 | 24.3 | 24.9 | 25.6 | 26.5 | | | | |
| | | HI PR | 241 | 260 | 274 | 286 | 271 | 291 | 308 | 321 | 308 | 331 | 350 | 365 | 351 | 378 | 399 | 416 | 395 | 425 | 449 | 468 | 436 | 469 | 496 | 517 | 436 | 469 | 496 | 517 | | | | |
| | | LO PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 127 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 136 | 145 | 158 | 169 | 136 | 145 | 158 | 169 | | | | |
| | | MBh | 51.3 | 52.9 | 57.2 | 61.4 | 50.2 | 51.6 | 55.9 | 60.0 | 49.0 | 50.4 | 54.6 | 58.6 | 47.8 | 49.2 | 53.2 | 57.1 | 45.4 | 46.7 | 50.6 | 54.3 | 42.0 | 43.3 | 46.8 | 50.3 | 42.0 | 43.3 | 46.8 | 50.3 | | | | |
| | | S/T | 0.80 | 0.72 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 | | | | |
| | | Delta T | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 13 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | | | | |
| | | KW | 4.17 | 4.25 | 4.37 | 4.51 | 4.47 | 4.56 | 4.69 | 4.83 | 4.73 | 4.82 | 4.97 | 5.13 | 4.96 | 5.06 | 5.22 | 5.38 | 5.16 | 5.26 | 5.43 | 5.60 | 5.32 | 5.44 | 5.61 | 5.79 | 5.32 | 5.44 | 5.61 | 5.79 | | | | |
| 1590 | | AMPS | 17.6 | 17.9 | 18.4 | 19.0 | 18.8 | 19.2 | 19.7 | 20.3 | 20.2 | 20.6 | 21.2 | 21.9 | 21.4 | 21.8 | 22.4 | 23.2 | 22.6 | 23.0 | 23.7 | 24.5 | 23.7 | 24.2 | 25.0 | 25.8 | 23.7 | 24.2 | 25.0 | 25.8 | | | | |
| | | HI PR | 234 | 252 | 266 | 277 | 263 | 283 | 299 | 311 | 299 | 322 | 340 | 354 | 340 | 366 | 387 | 403 | 383 | 412 | 435 | 454 | 423 | 455 | 481 | 501 | 423 | 455 | 481 | 501 | | | | |
| | | LO PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 138 | 116 | 124 | 135 | 144 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 158 | 132 | 141 | 154 | 164 | 132 | 141 | 154 | 164 | | | | |
| | | | NOTE: Shaded area is ACCA (TVA) conditions | | | | | | | | | | KW = Total system power | | | | | | | | | | | | | | | | | | | | | |
| | | | * IDB: Entering Indoor Dry Bulb Temperature | | | | | | | | | | AMPS: Unit amps (comp.+ evaporator + condenser fan motors) | | | | | | | | | | | | | | | | | | | | | |
| | | | High and low pressures are measured at the liquid and suction access fittings. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| IDB* | Airflow | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | |
| 80 | 2035 | MBh | 58.3 | 59.6 | 63.7 | 68.1 | 57.0 | 58.2 | 62.2 | 66.5 | 55.6 | 56.8 | 60.7 | 64.9 | 54.3 | 55.4 | 59.2 | 63.3 | 51.5 | 52.7 | 56.3 | 60.1 | 47.7 | 48.8 | 52.1 | 55.7 |
| | | S/T | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.84 | 0.62 |
| | | Delta T | 25 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 25 | 21 | 17 | 23 | 24 | 21 | 17 | 22 | 22 | 20 | 16 |
| | | KW | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 |
| | | AMPS | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 |
| | | HIPR | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 358 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 |
| | | LO PR | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 |
| | | MBh | 56.6 | 57.9 | 61.8 | 66.1 | 55.3 | 56.5 | 60.4 | 64.5 | 54.0 | 55.2 | 58.9 | 63.0 | 52.7 | 53.8 | 57.5 | 61.5 | 50.0 | 51.1 | 54.6 | 58.4 | 46.3 | 47.4 | 50.6 | 54.1 |
| | | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.80 | 0.60 |
| | | Delta T | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 25 | 25 | 22 | 18 | 24 | 24 | 20 | 16 |
| | KW | 4.30 | 4.38 | 4.51 | 4.65 | 4.60 | 4.70 | 4.84 | 4.99 | 4.88 | 4.98 | 5.13 | 5.29 | 5.12 | 5.23 | 5.39 | 5.56 | 5.32 | 5.44 | 5.61 | 5.79 | 5.50 | 5.62 | 5.79 | 5.98 | |
| | AMPS | 18.1 | 18.5 | 19.0 | 19.6 | 19.4 | 19.8 | 20.3 | 21.0 | 20.8 | 21.3 | 21.9 | 22.6 | 22.1 | 22.5 | 23.2 | 24.0 | 23.3 | 23.8 | 24.5 | 25.3 | 24.5 | 25.1 | 25.8 | 26.7 | |
| | HIPR | 244 | 262 | 277 | 289 | 274 | 294 | 311 | 324 | 311 | 335 | 354 | 369 | 354 | 381 | 403 | 420 | 399 | 429 | 453 | 473 | 440 | 474 | 501 | 522 | |
| | LO PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 170 | |
| | MBh | 52.3 | 53.4 | 57.1 | 61.0 | 51.0 | 52.2 | 55.7 | 59.6 | 49.8 | 50.9 | 54.4 | 58.2 | 48.6 | 49.7 | 53.1 | 56.7 | 46.2 | 47.2 | 50.4 | 53.9 | 42.8 | 43.7 | 46.7 | 49.9 | |
| | S/T | 0.88 | 0.82 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.01 | 0.94 | 0.77 | 0.57 | |
| | Delta T | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 23 | 18 | 27 | 26 | 22 | 18 | 25 | 24 | 21 | 17 | |
| | KW | 4.20 | 4.28 | 4.41 | 4.54 | 4.50 | 4.59 | 4.73 | 4.87 | 4.76 | 4.86 | 5.01 | 5.17 | 5.00 | 5.10 | 5.26 | 5.43 | 5.20 | 5.31 | 5.47 | 5.65 | 5.37 | 5.48 | 5.65 | 5.84 | |
| | AMPS | 17.7 | 18.1 | 18.6 | 19.2 | 18.9 | 19.3 | 19.9 | 20.5 | 20.3 | 20.8 | 21.3 | 22.0 | 21.5 | 22.0 | 22.6 | 23.4 | 22.7 | 23.2 | 23.9 | 24.7 | 23.9 | 24.4 | 25.2 | 26.0 | |
| | HIPR | 236 | 255 | 269 | 280 | 265 | 286 | 302 | 315 | 302 | 325 | 343 | 358 | 344 | 370 | 391 | 407 | 387 | 416 | 439 | 458 | 427 | 460 | 486 | 506 | |
| | LO PR | 107 | 114 | 124 | 132 | 113 | 120 | 131 | 140 | 117 | 125 | 136 | 145 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 160 | 134 | 142 | 155 | 165 | |
| 85 | 2035 | MBh | 59.3 | 60.5 | 63.3 | 67.6 | 58.0 | 59.1 | 61.9 | 66.0 | 56.6 | 57.7 | 60.4 | 64.4 | 55.2 | 56.3 | 58.9 | 62.9 | 52.4 | 53.5 | 56.0 | 59.7 | 48.6 | 49.5 | 51.9 | 55.3 |
| | | S/T | 1.00 | 0.96 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.81 |
| | | Delta T | 27 | 26 | 25 | 22 | 26 | 27 | 25 | 22 | 26 | 26 | 25 | 22 | 25 | 25 | 25 | 22 | 24 | 24 | 25 | 22 | 22 | 22 | 23 | 20 |
| | | KW | 4.36 | 4.45 | 4.58 | 4.72 | 4.67 | 4.77 | 4.91 | 5.07 | 4.95 | 5.06 | 5.21 | 5.38 | 5.20 | 5.31 | 5.47 | 5.65 | 5.41 | 5.52 | 5.70 | 5.88 | 5.59 | 5.71 | 5.89 | 6.08 |
| | | AMPS | 18.4 | 18.8 | 19.3 | 19.9 | 19.7 | 20.1 | 20.7 | 21.3 | 21.2 | 21.6 | 22.2 | 23.0 | 22.4 | 22.9 | 23.6 | 24.4 | 23.7 | 24.2 | 24.9 | 25.8 | 24.9 | 25.5 | 26.2 | 27.1 |
| | | HIPR | 249 | 268 | 283 | 295 | 279 | 300 | 317 | 331 | 317 | 342 | 361 | 376 | 361 | 389 | 411 | 428 | 407 | 438 | 462 | 482 | 449 | 484 | 511 | 533 |
| | | LO PR | 112 | 120 | 131 | 139 | 119 | 126 | 138 | 147 | 123 | 131 | 143 | 153 | 130 | 138 | 151 | 160 | 136 | 145 | 158 | 168 | 141 | 150 | 163 | 174 |
| | | MBh | 57.6 | 58.7 | 61.5 | 65.6 | 56.3 | 57.4 | 60.1 | 64.1 | 54.9 | 56.0 | 58.6 | 62.6 | 53.6 | 54.6 | 57.2 | 61.0 | 50.9 | 51.9 | 54.4 | 58.0 | 47.2 | 48.1 | 50.3 | 53.7 |
| | | S/T | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.95 | 0.77 |
| | | Delta T | 28 | 27 | 26 | 22 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 27 | 28 | 26 | 23 | 26 | 26 | 26 | 23 | 24 | 24 | 24 | 21 |
| | KW | 4.33 | 4.41 | 4.54 | 4.68 | 4.64 | 4.73 | 4.88 | 5.03 | 4.92 | 5.02 | 5.17 | 5.33 | 5.16 | 5.27 | 5.43 | 5.60 | 5.37 | 5.48 | 5.65 | 5.83 | 5.54 | 5.66 | 5.84 | 6.03 | |
| | AMPS | 18.3 | 18.7 | 19.2 | 19.8 | 19.5 | 19.9 | 20.5 | 21.2 | 21.0 | 21.4 | 22.0 | 22.8 | 22.2 | 22.7 | 23.4 | 24.2 | 23.5 | 24.0 | 24.7 | 25.6 | 24.7 | 25.3 | 26.0 | 26.9 | |
| | HIPR | 246 | 265 | 280 | 292 | 276 | 297 | 314 | 327 | 314 | 338 | 357 | 372 | 358 | 385 | 407 | 424 | 403 | 433 | 458 | 477 | 445 | 479 | 506 | 527 | |
| | LO PR | 111 | 118 | 129 | 138 | 118 | 125 | 137 | 145 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 135 | 143 | 156 | 166 | 139 | 148 | 162 | 172 | |
| | MBh | 53.2 | 54.2 | 56.8 | 60.6 | 51.9 | 52.9 | 55.4 | 59.2 | 50.7 | 51.7 | 54.1 | 57.7 | 49.5 | 50.4 | 52.8 | 56.3 | 47.0 | 47.9 | 50.2 | 53.5 | 43.5 | 44.4 | 46.5 | 49.6 | |
| | S/T | 0.92 | 0.89 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.92 | 0.75 | |
| | Delta T | 28 | 28 | 26 | 23 | 29 | 28 | 27 | 23 | 29 | 28 | 27 | 23 | 29 | 28 | 27 | 23 | 27 | 28 | 26 | 23 | 25 | 26 | 25 | 21 | |
| | KW | 4.23 | 4.31 | 4.44 | 4.57 | 4.53 | 4.62 | 4.76 | 4.91 | 4.80 | 4.90 | 5.05 | 5.21 | 5.04 | 5.14 | 5.30 | 5.47 | 5.24 | 5.35 | 5.52 | 5.69 | 5.41 | 5.53 | 5.70 | 5.88 | |
| | AMPS | 17.9 | 18.2 | 18.7 | 19.3 | 19.1 | 19.5 | 20.0 | 20.7 | 20.5 | 20.9 | 21.5 | 22.2 | 21.7 | 22.2 | 22.8 | 23.6 | 22.9 | 23.4 | 24.1 | 24.9 | 24.1 | 24.6 | 25.4 | 26.2 | |
| | HIPR | 239 | 257 | 271 | 283 | 268 | 288 | 305 | 318 | 305 | 328 | 346 | 361 | 347 | 374 | 395 | 411 | 391 | 420 | 444 | 463 | 432 | 464 | 490 | 511 | |
| | LO PR | 108 | 115 | 125 | 134 | 114 | 121 | 132 | 141 | 119 | 126 | 138 | 147 | 125 | 132 | 145 | 154 | 130 | 139 | 152 | 161 | 135 | 144 | 157 | 167 | |

* NOTE: Shaded area reflects AHRI rating conditions
 High and low pressures are measured at the liquid and suction access fittings.

IDB: Entering Indoor Dry Bulb Temperature
 KW = Total system power
 AMPS: Unit amps (comp.+ evaporator + condenser fan motors)

COOLING PERFORMANCE DATA

PERFORMANCE TEST

All data based upon listed indoor dry bulb temperature. .00 inches external static pressure on coil of outdoor section. Indoor air cubic feet per minute (CFM) as listed in the Performance Data Sheets:

If conditions vary from this, results will change as follows:

1. As indoor dry bulb temperatures increase, a slight increase will occur in indoor air temperature drop (**Delta T**). Low and high side pressures and power will not change.
2. As indoor CFM decreases, a slight increase will occur in indoor temperature drop (**Delta T**). A slight decrease will occur in low and high side pressures and power.

A properly operating unit should be within plus or minus **3 degrees** of the typical (**Delta T**) value shown.

A properly operating unit should be within plus or minus **7 PSIG** of the **HI PR** shown.

A properly operating unit should be within plus or minus **3 PSIG** of the **LO PR** shown.

A properly operating unit should be within plus or minus **3 Amps** of the typical value shown.

WIRING DIAGRAMS

5mm Coils

APG1324***M41(B/C/D)*
 GPG1324***M41(B/C/D)*
 *PG13[30,42]***M41(B/C/D)*
 *PG1336***M41(B/D)*




WARNING

HIGH VOLTAGE!
 DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



FOR UNITS MANUFACTURED BEFORE 3/10/14

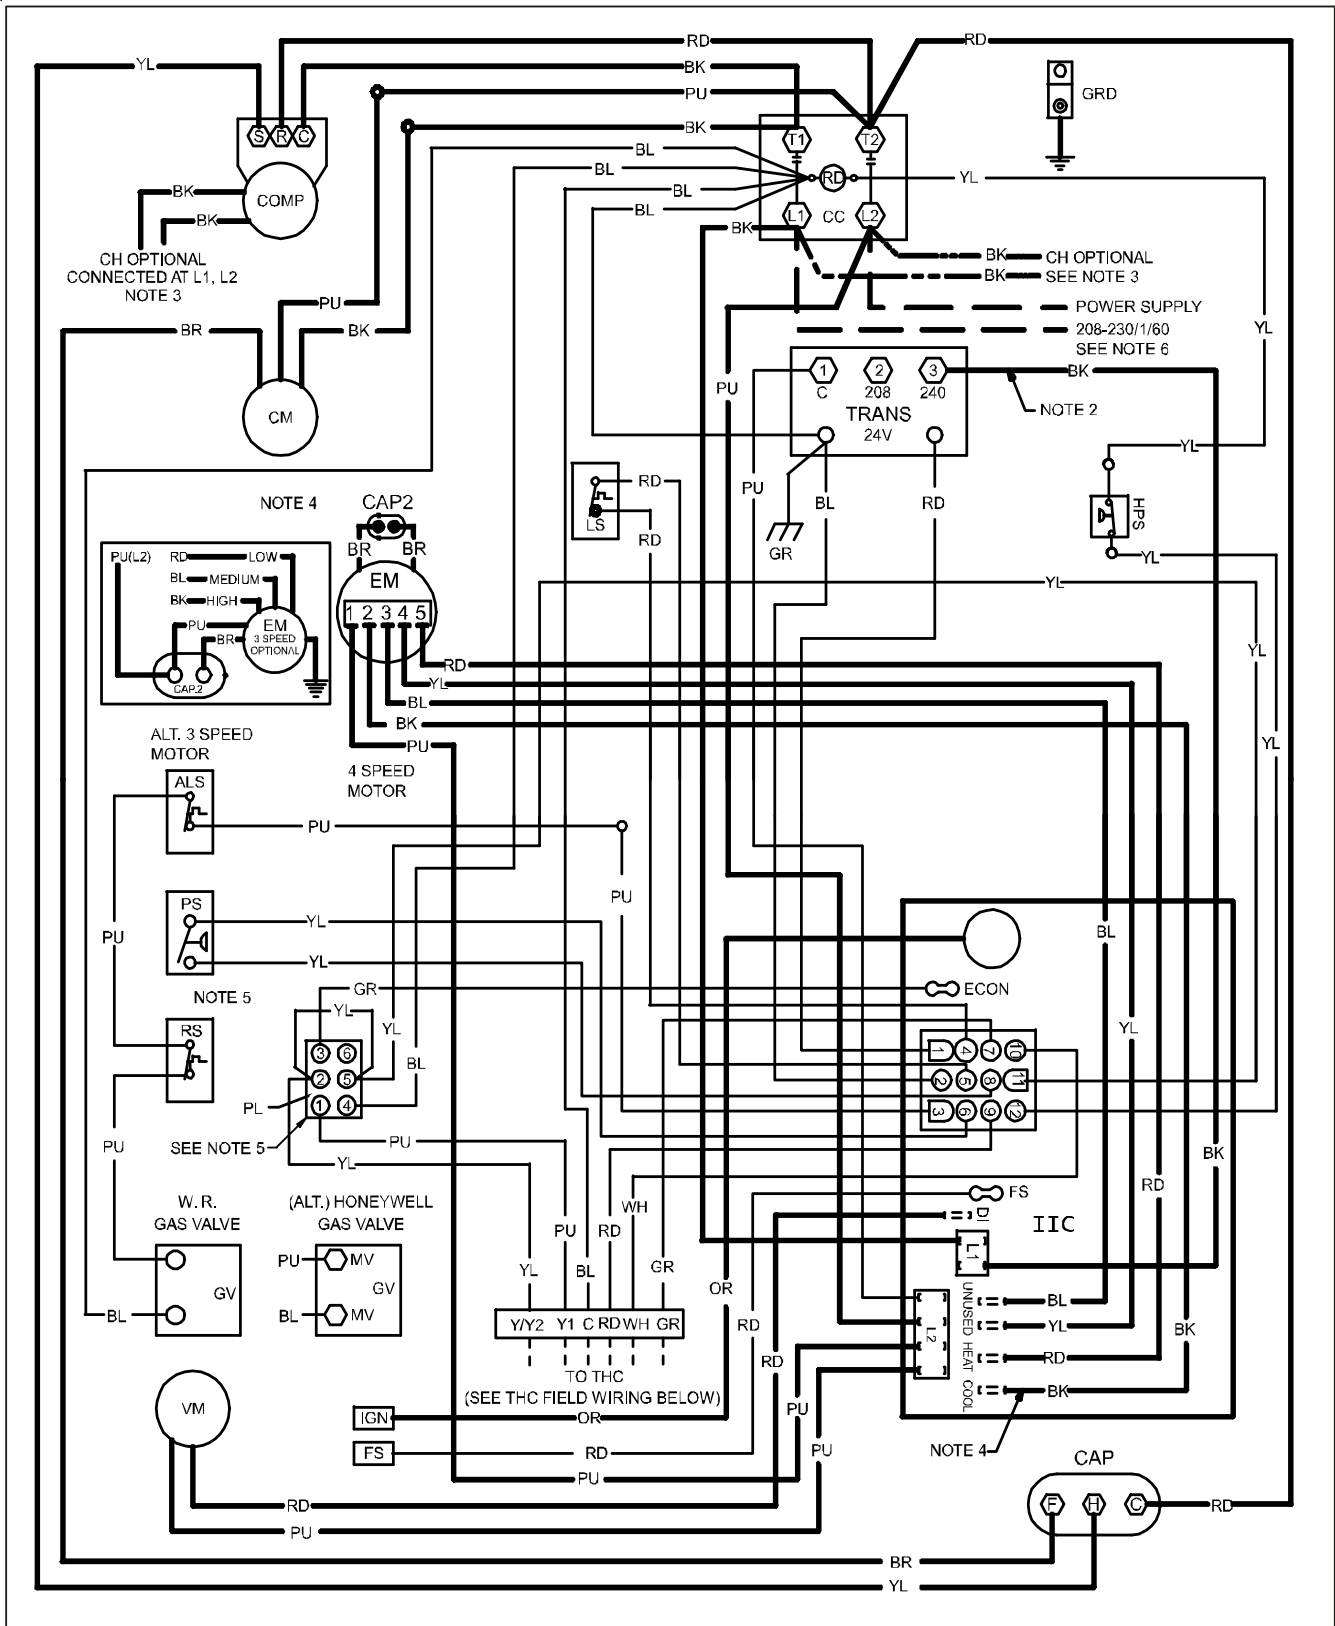

0140G02358-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS

5mm Coils

APG1324***M41(B/C)*: GPG1324***M41(B/C/D)*
 *PG13[30,42]***M41(B/C/D)*
 *PG1336***M41(B/D)*

WARNING

HIGH VOLTAGE!

DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

FOR UNITS MANUFACTURED BEFORE 3/10/14

COMPONENT LEGEND

| | |
|---------------------------------|---------------------------|
| ALS AUXILIARY LIMIT SWITCH | ● WIRE SPLICE |
| CAP CAPACITOR | ○ MARKED TERMINAL |
| COMP COMPRESSOR | ○ UNMARKED TERMINAL |
| CM CONDENSER MOTOR | |
| CC CONTACTOR | <u>WIRING</u> |
| CH CRANKCASE HEATER | — HIGH VOLTAGE |
| EM EVAPORATOR MOTOR | — LOW VOLTAGE |
| FS FLAME SENSOR | — FIELD INSTALLED POWER |
| GV GAS VALVE | — FIELD INSTALLED CONTROL |
| IIC INTEGRATED IGNITION CONTROL | — OPTIONAL HIGH VOLTAGE |
| IGN IGNITOR | — OPTIONAL LOW VOLTAGE |
| LS LIMIT SWITCH | |
| PL PLUG | |
| PS PRESSURE SWITCH | |
| RS ROLLOUT SWITCH | |
| THC THERMOSTAT HEAT & COOL | <u>WIRE CODE</u> |
| TRANS TRANSFORMER | BK - BLACK |
| VM VENT MOTOR | BL - BLUE |
| HPS HIGH PRESSURE SWITCH | BR - BROWN |
| | GR - GREEN |
| | OR - ORANGE |
| | PK - PINK |
| | PU - PURPLE |
| | RD - RED |
| | WH - WHITE |
| | YL - YELLOW |
| | BL/PK - BLUE/PINK |

NOTES:

- REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL.(USE COPPER CONDUCTOR ONLY)
- FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL ① TO TERMINAL ② ON TRANSFORMER.
- CRANKCASE HEATER (OPTIONAL).
- FOR DIFFERENT THAN FACTORY SPEED TAP. CHANGE COOLING SPEED AT COOL TERMINAL (IIC). CHANGE HEATING SPEED AT HEAT TERMINAL (IIC)

| | |
|------------------------|------------------------|
| 4 SPEED MOTOR | 3 SPEED MOTOR |
| B - HIGH SPEED | B - HIGH SPEED |
| BL - MEDIUM HIGH SPEED | BL - MEDIUM HIGH SPEED |
| Y - MEDIUM LOW SPEED | R - LOW SPEED |
| R - LOW SPEED | |

5. ACCESSORY ECONOMIZER PLUG ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.

6. USE COPPER WIRE

INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|---|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

208-230/1/60

THC-FIELD WIRING

| | |
|---------------------------------|---|
| <p><u>THC-NO ECONOMIZER</u></p> | <p><u>2 STAGE COOLING WITH ECONOMIZER</u></p> |
|---------------------------------|---|

0140G02358-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS

5mm Coils

APG1324***M41(B/C)*: GPG1324***M41(B/C/D)*
 *PG13[30,42]***M41(B/C/D)*
 *PG1336***M41(B/D)*




WARNING

HIGH VOLTAGE!
 DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



FOR UNITS MANUFACTURED AFTER 3/9/14

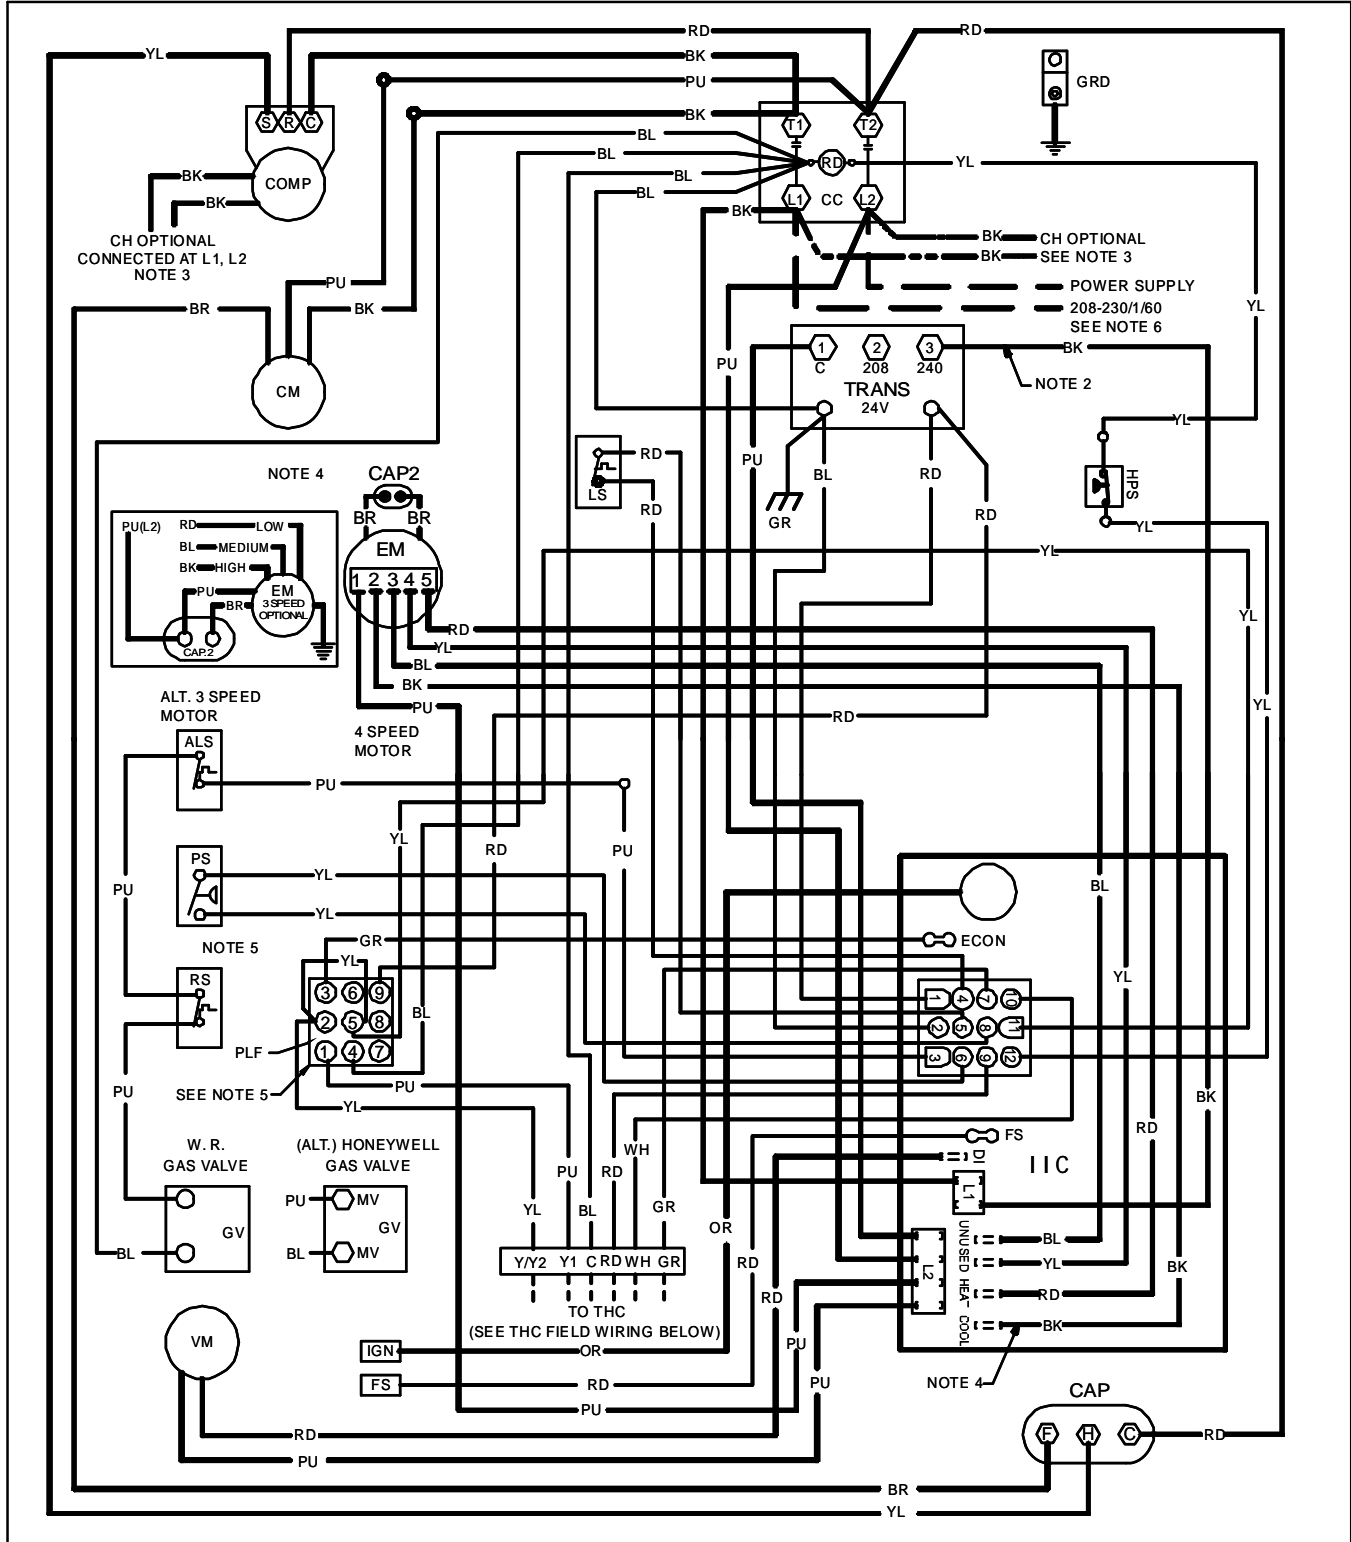

0140G03116-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS


5mm Coils

APG1324***M41(B/C)*; GPG1324***M41(B/C/D)*
 *PG13[30,42]***M41(B/C/D)*
 *PG1336***M41(B/D)*

WARNING

HIGH VOLTAGE!
 DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

FOR UNITS MANUFACTURED AFTER 3/9/14

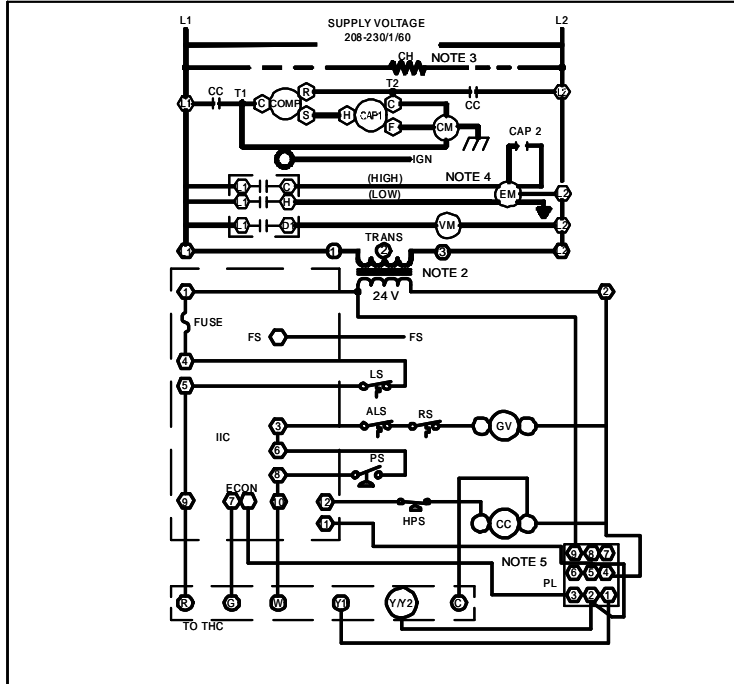

COMPONENT LEGEND

| | |
|---|---|
| <p>ALS AUXILIARY LIMIT SWITCH CAP CAPACITOR COMP COMPRESSOR CM CONDENSER MOTOR CC CONTACTOR CH CRANKCASE HEATER EM EVAPORATOR MOTOR FS FLAME SENSOR GV GAS VALVE IIC INTEGRATED IGNITION CONTROL IGN IGNITOR LS LIMIT SWITCH PL PLUG PS PRESSURE SWITCH RS ROLLOUT SWITCH THC THERMOSTAT HEAT & COOL TRANS TRANSFORMER VM VENT MOTOR HPS HIGH PRESSURE SWITCH</p> | <p>● WIRE SPLICE ⊕ MARKED TERMINAL ○ UNMARKED TERMINAL</p> <p style="text-align: center; font-weight: bold; font-size: 0.7em;">WIRING</p> <p>— HIGH VOLTAGE — LOW VOLTAGE - - - FIELD INSTALLED POWER - - - FIELD INSTALLED CONTROL - - - OPTIONAL HIGH VOLTAGE - - - OPTIONAL LOW VOLTAGE</p> |
|---|---|

WIRE CODE

| | |
|-------|-----------|
| BK | BLACK |
| BL | BLUE |
| BR | BROWN |
| GR | GREEN |
| OR | ORANGE |
| PK | PINK |
| PJ | PURPLE |
| RD | RED |
| WH | WHITE |
| YL | YELLOW |
| BL/PK | BLUE/PINK |

- NOTES :
1. REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL. (USE COPPER CONDUCTOR ONLY)
 2. FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL ③ TO TERMINAL ② ON TRANSFORMER.
 3. CRANKCASE HEATER (OPTIONAL).
 4. FOR DIFFERENT THAN FACTORY SPEED TAP, CHANGE COOLING SPEED AT COOL TERMINAL (IIC). CHANGE HEATING SPEED AT HEAT TERMINAL (IIC)
- | | |
|---|---|
| <p>4 SPEED MOTOR B - HIGH SPEED BL - MEDIUM HIGH SPEED Y - MEDIUM LOW SPEED R - LOW SPEED</p> | <p>3 SPEED MOTOR B - HIGH SPEED BL - MEDIUM HIGH SPEED R - LOW SPEED</p> |
|---|---|
5. ACCESSORY ECONOMIZER PLUG ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.
 6. USE COPPER WIRE


208-230/1/60

INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|---|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

THC-FIELD WIRING



0140G03116-A

WIRING DIAGRAMS

5mm Coils

PG13[48-60]**M41(B/C/D)




WARNING

HIGH VOLTAGE!
 DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.



FOR UNITS MANUFACTURED BEFORE 3/10/14

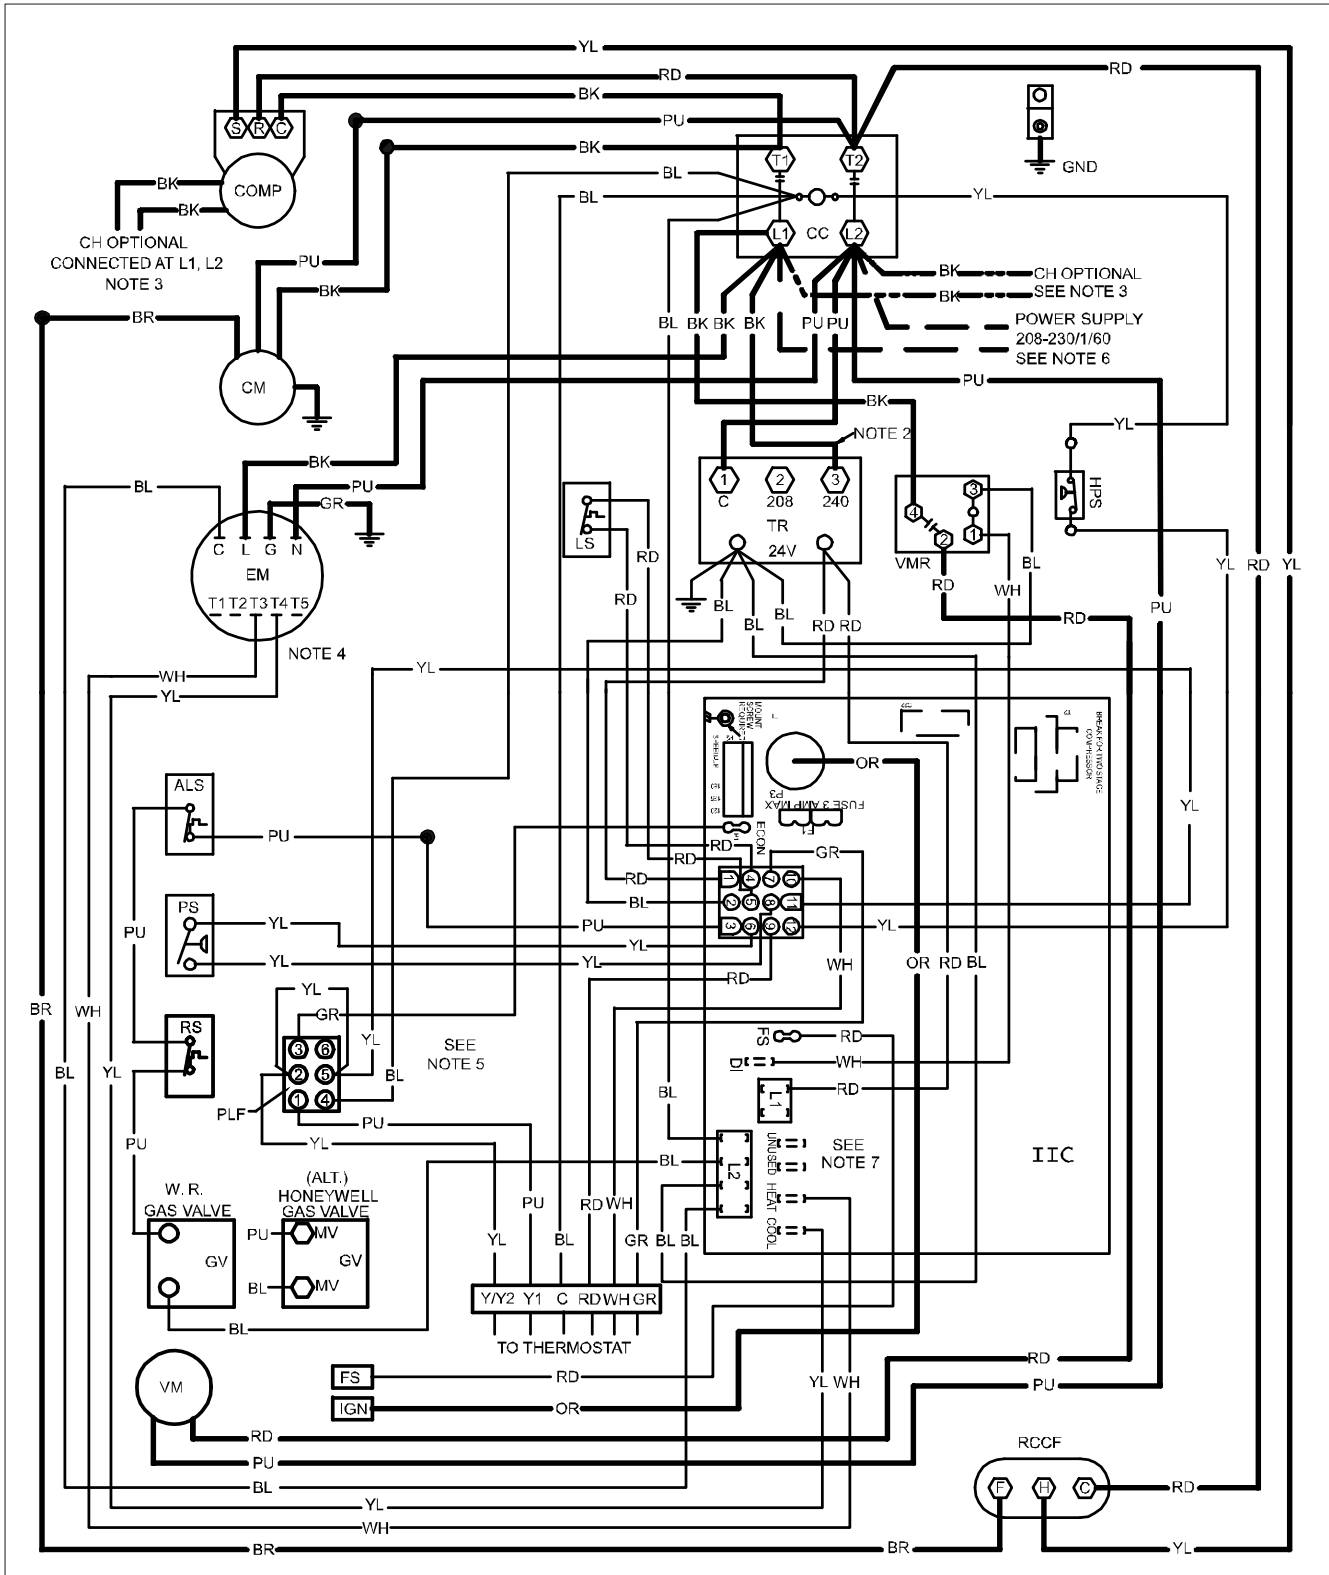

0140G02359-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS

5mm Coils

PG13[48-60]**M41(B/C/D)

WARNING

HIGH VOLTAGE!

DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

FOR UNITS MANUFACTURED BEFORE 3/10/14

COMPONENT LEGEND

| | | |
|------|----------------------------------|---|
| ALS | AUXILIARY LIMIT SWITCH | <p>WIRING</p> <p>— HIGH VOLTAGE</p> <p>— LOW VOLTAGE</p> <p>- - - FIELD INSTALLED POWER</p> <p>- - - FIELD INSTALLED CONTROL</p> <p>— OPTIONAL HIGH VOLTAGE</p> <p>- - - OPTIONAL LOW VOLTAGE</p> |
| COMP | COMPRESSOR | |
| CM | CONDENSER MOTOR | |
| C | CONTACTOR | |
| CH | CRANKCASE HEATER | |
| EM | EVAPORATOR MOTOR | |
| F | FUSE | |
| FS | FLAME SENSOR | |
| GND | EQUIPMENT GROUND | |
| GV | GAS VALVE | |
| IIC | INTEGRATED IGNITION CONTROL | <p>WIRE CODE</p> <p>BK - BLACK</p> <p>BL - BLUE</p> <p>BR - BROWN</p> <p>GR - GREEN</p> <p>OR - ORANGE</p> <p>PK - PINK</p> <p>PJ - PURPLE</p> <p>RD - RED</p> <p>WH - WHITE</p> <p>YL - YELLOW</p> <p>BL/PK - BLUE/PINK</p> |
| IGN | IGNITOR | |
| LS | LIMIT SWITCH | |
| PLF | FEMALE PLUG/CONNECTOR | |
| PS | PRESSURE SWITCH | |
| RCCF | RUN CAPACITOR FOR COMPRESSOR/FAN | |
| RS | ROLLOUT SWITCH | |
| TR | TRANSFORMER | |
| VM | VENT MOTOR | |
| VMR | VENT MOTOR RELAY | |
| HPS | HIGH PRESSURE SWITCH | |

NOTES :

- REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (USE COPPER CONDUCTOR ONLY).
- FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL ④ TO TERMINAL ② ON TRANSFORMER.
- CRANKCASE HEATER NOT SUPPLIED ON ALL UNITS.
- FOR DIFFERENT THAN FACTORY SPEED TAP, CHANGE COOLING SPEED AT MOTOR T4 AND T5 TERMINALS. CHANGE HEATING SPEED AT MOTOR T1, T2 AND T3 TERMINALS.

| | |
|------------------------------------|-----------------------------------|
| <u>COOLING SPEED (YELLOW WIRE)</u> | <u>HEATING SPEED (WHITE WIRE)</u> |
| T4 - LOW SPEED | T1 - LOW SPEED |
| T5 - HIGH SPEED | T2 - MED. SPEED |
| | T3 - HIGH SPEED |

- ACCESSORY ECONOMIZER PLUG ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.
- USE COOPER CONDUCTORS ONLY.

†† USE NEC CLASS 2 WIRE.

208-230/1/60

INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|---|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

THERMOSTAT FIELD WIRING ††

NO ECONOMIZER

2 STAGE COOLING WITH ECONOMIZER

0140G02359-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.


WIRING DIAGRAMS

5mm Coils

*PG13[48-60]**M41(B/C/D)*

WARNING HIGH VOLTAGE!
DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

FOR UNITS MANUFACTURED AFTER 3/9/14

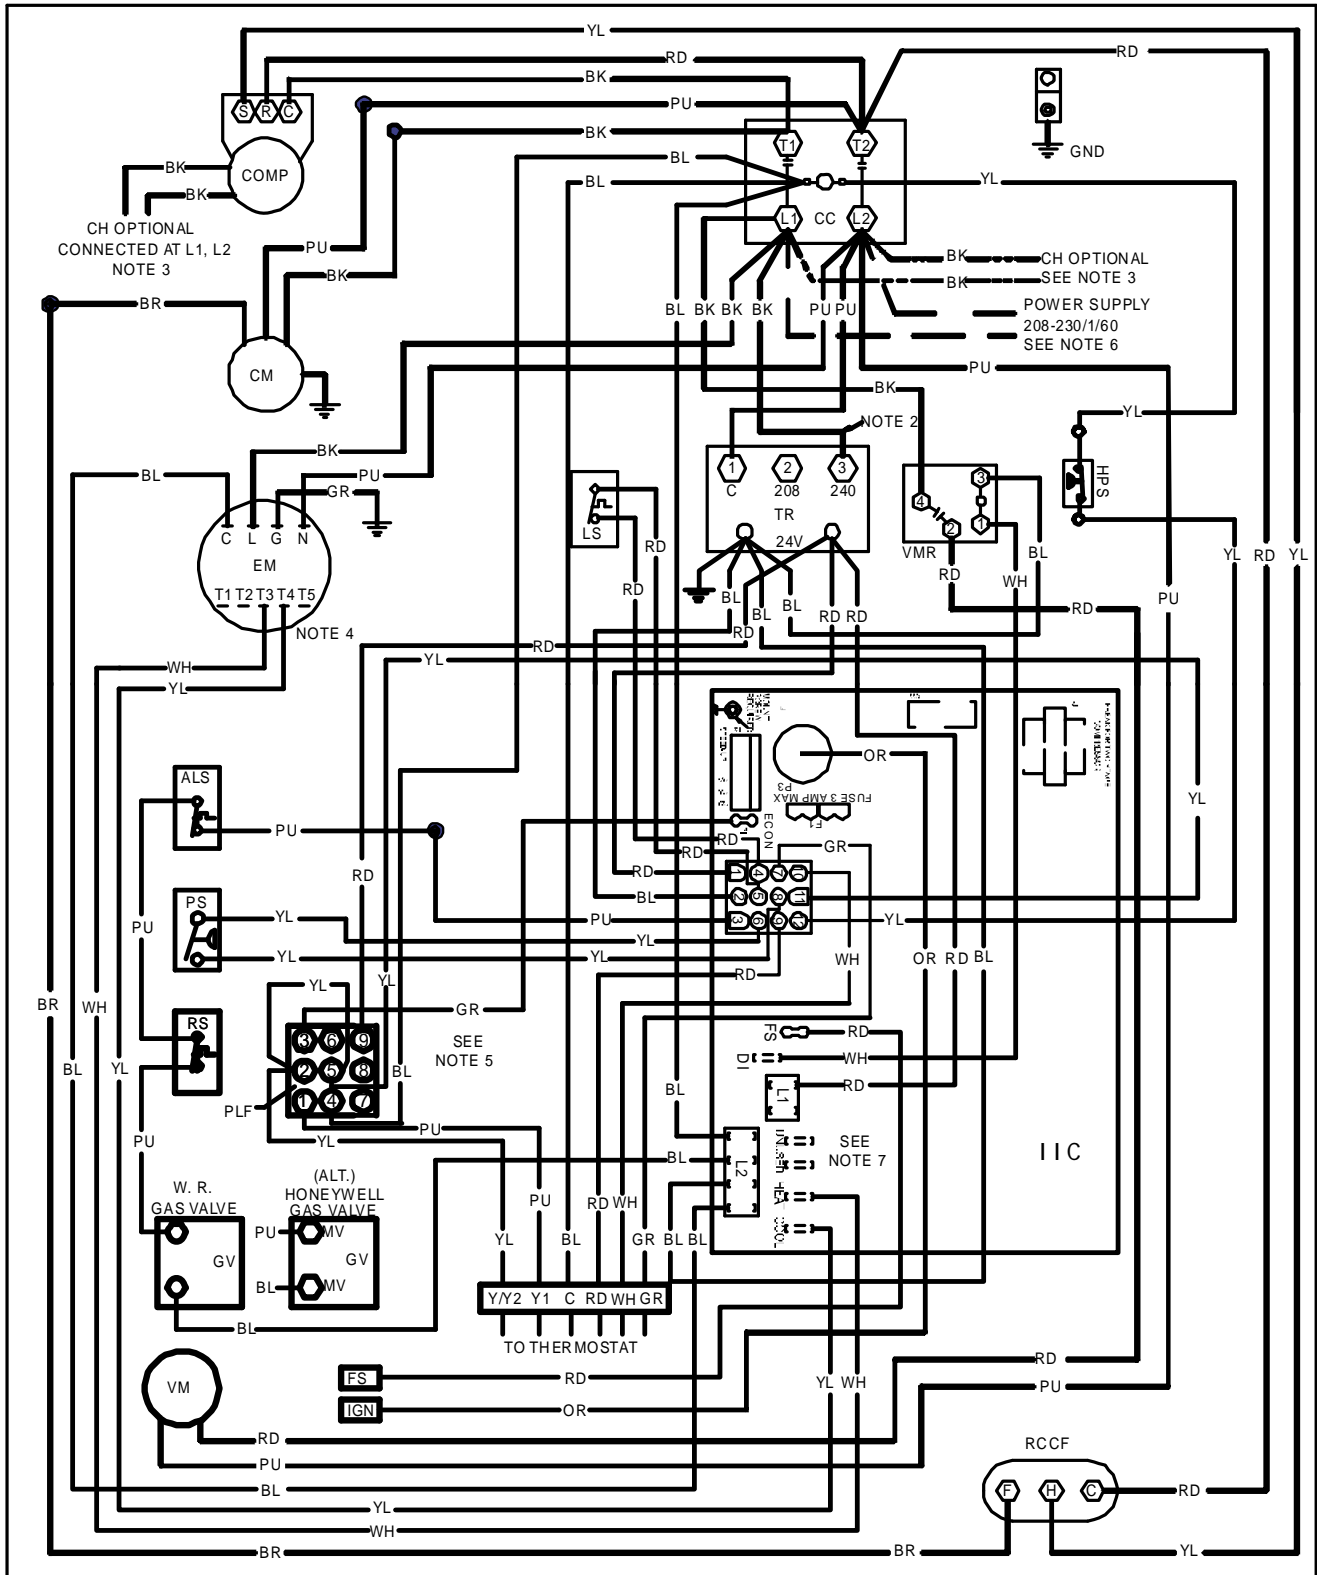

0140G03117-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAMS

5mm Coils


PG13[48-60]**M41(B/C/D)

WARNING

HIGH VOLTAGE!

DISCONNECT ALL POWER BEFORE SERVICING OR INSTALLING THIS UNIT. MULTIPLE POWER SOURCES MAY BE PRESENT. FAILURE TO DO SO MAY CAUSE PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

FOR UNITS MANUFACTURED AFTER 3/9/14

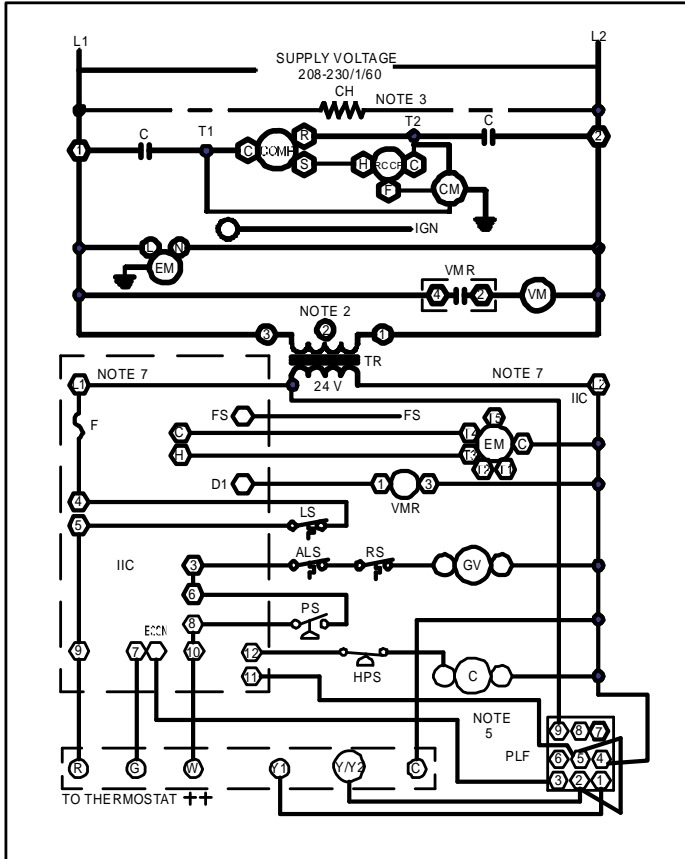

COMPONENT LEGEND

| | | | |
|------|----------------------------------|--|--|
| ALS | AUXILIARY LIMIT SWITCH | | |
| COMP | COMPRESSOR | | |
| CM | CONDENSER MOTOR | | |
| C | CONTACTOR | | |
| CH | CRANKCASE HEATER | | |
| EM | EVAPORATOR MOTOR | | |
| F | FUSE | | |
| FS | FLAME SENSOR | | |
| GND | EQUIPMENT GROUND | | |
| GV | GAS VALVE | | |
| IIC | INTEGRATED IGNITION CONTROL | | |
| IGN | IGNITOR | | |
| LS | LIMIT SWITCH | | |
| PLF | FEMALE PLUG/CONNECTOR | | |
| PS | PRESSURE SWITCH | | |
| RCCF | RUN CAPACITOR FOR COMPRESSOR/FAN | | |
| RS | ROLLOUT SWITCH | | |
| TR | TRANSFORMER | | |
| VM | VENT MOTOR | | |
| VMR | VENT MOTOR RELAY | | |
| HPS | HIGH PRESSURE SWITCH | | |

WIRING

| | |
|--|-------------------------|
| | HIGH VOLTAGE |
| | LOW VOLTAGE |
| | FIELD INSTALLED POWER |
| | FIELD INSTALLED CONTROL |
| | OPTIONAL HIGH VOLTAGE |
| | OPTIONAL LOW VOLTAGE |

WIRE CODE

| | |
|-------|-------------|
| BK | - BLACK |
| BL | - BLUE |
| BR | - BROWN |
| GR | - GREEN |
| OR | - ORANGE |
| PK | - PINK |
| PU | - PURPLE |
| RD | - RED |
| WH | - WHITE |
| YL | - YELLOW |
| BL/PK | - BLUE/PINK |

NOTES :

- REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (USE COPPER CONDUCTOR ONLY).
- FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL ① TO TERMINAL ② ON TRANSFORMER.
- CRANKCASE HEATER NOT SUPPLIED ON ALL UNITS.
- FOR DIFFERENT THAN FACTORY SPEED TAP, CHANGE COOLING SPEED AT MOTOR T4 AND T5 TERMINALS. CHANGE HEATING SPEED AT MOTOR T1, T2 AND T3 TERMINALS.

| | |
|------------------------------------|-----------------------------------|
| <u>COOLING SPEED (YELLOW WIRE)</u> | <u>HEATING SPEED (WHITE WIRE)</u> |
| T4 - LOW SPEED | T1 - LOW SPEED |
| T5 - HIGH SPEED | T2 - MED. SPEED |
| | T3 - HIGH SPEED |

- ACCESSORY ECONOMIZER PLUG ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.
- USE COPPER CONDUCTORS ONLY.

++ USE NEC CLASS 2 WIRE.

208-230/1/60

INSTALLER/SERVICEMAN
THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

| STATUS LIGHT | EQUIP. STATUS | CHECK |
|--------------|---|---|
| ON | NORMAL OPERATION | - |
| OFF | NO POWER OR INTERNAL CONTROL FAULT | CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL |
| 1 BLINK | IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH | GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN |
| 2 BLINKS | PRESSURE SWITCH OPEN | CHECK PRESSURE SWITCH |
| 3 BLINKS | PRESSURE SWITCH CLOSED WITHOUT INDUCER ON | CHECK PRESSURE SWITCH |
| 4 BLINKS | OPEN LIMIT SWITCH | MAIN LIMIT OPEN BAD SWITCH |
| 5 BLINKS | FALSE FLAME SENSED | STICKING GAS VALVE |
| 6 BLINKS | COMPRESSOR OUTPUT DELAY | 3 MIN. COMP. ANTI-CYCLE TIMER |

THERMOSTAT FIELD WIRING ++

NO ECONOMIZER

2 STAGE COOLING WITH ECONOMIZER

0140G03117-A

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.