



Change for Life	Multi-Room Ductless systems				
Submittal Data: FLR18	18,000 BTU/H Universal Floor/Ceiling Unit				
Job Name		Location	Date		
Purchaser		Engineer			
Submitted To		For Refer	ence Approval	Construction	
Unit Designation		Schedule No.			
GENERAL FEATURES					
-Floor Stand or Ceiling Mount					
-Quiet Operation -Multi-Speed Fan			- manual	-	
-4-way Discharge Air Flow		Hilling			
-Swing Louvers -Remote Control Lockout			*		
-Wired and Wireless Remote Controller	re		G GREE		
-Limited 5 yr. Parts Warranty	3	GONE D	THE RESERVE	IN DEPT. DO	
Enfined 5 yr. 1 dits warranty		Freder ♥ Date (DDE)			
System Ra	Physical Specifications				
Cooling*	17,065 BTU/H	Unit Dimensions (LxHx[2)	48.0 x 27.5 x 9.0 -in	
Rated Capacity	17,000 010/11	OTHE DIFFICUSIONS (EXTIXE))	46.0 x 27.5 x 9.0 -III 1220 x 700 x 225-mm	
Heating*				1220 X 700 X 223-111111	
Rated Capacity	18,772 BTU/H	Weight (Net/Shipping)		88/110 LBS	
9	.,	3 7 (3 3 7 7 3)			
Sound Level (Hi/Lo)**		Drain Size (OD)		0.67-in	
Cooling	45/40 dbA			17-mm	
Heating	45/40 dbA				
Air Flow (max)					
Indoor Fan	559 CFM				
Electrical R	latin a	Refrigerant Piping Data			
Electrical N	Refrigerant Piping Data				
Fan Motor		Refrigerant Type		R410A	
Output Power	110 W	3 - 31-			
FLA	0.56 A	Gas Pipe Size (OD)		1/2-in	
Power Supply		Liquid Pipe Size (OD)		1/4-in	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz				
Voltage Range	187 - 253 V	Connection Method		Flared	
MCA	1.0 A				
Interconnecting Cable Wire Size	14-4 AWG				
		* Test conditions are based of			
		**Sound Power ratings are per AHRI 270 and AHRI 350			
RANOZ	AHRI	CERTIFIED		(TD)	

DIMENSIONAL SPECIFICATIONS


FLR18HP230V1AF

18,000 BTUH MODEL

Model # FLR18HP230V1AF 18,000 BTUH 230V





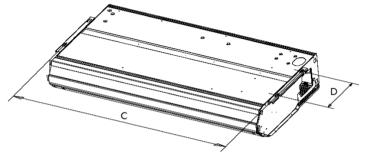


Dimensions

	Α	В	С	D	Н	Н
(mm)	1220	225	1158	280	700	700
(inches)	48.0	8.9	45.6	11.0	27.6	27.6


Note: Size refrigerant lines based on evaporator port sizes.


MINIMUM CLEARANCE


♦ Wall type

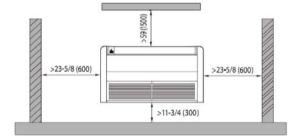



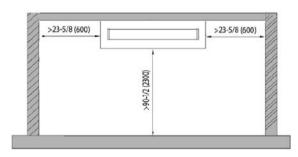





- 1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
- 2. Power wiring cable size must comply with applicable national and local codes.
- 3. Test conditions are based on AHRI 210/240.

