



Submittal Data: FJ-IR-WIFI-1NA

IR Wi-Fi Interface

Job Name:	Date:
Location:	Approval:
Engineer:	Construction:
Submitted to:	Unit #:
Submitted by:	Drawing #:



Technical Features

Electrical

Temperature

Dimensions and Weight

Reference:


E IIII CII SI CII SI CII CI TI CI SI	<u></u>
H x W x D In(mm)	
Weight	0.16 lbs. (76 g)
Enclosure	ABS (V-0, 5VB). 2,1 mm thickness
	PC (V-2. 1 mm thickness
Color	
Mounting	Wall
LED Indicators	
RoHS Conformity	Compliant with RoHS directive (2002/95/CE)
Certifications CE conformity to	EMC directive (2004/108/EC) and low voltage directive
	(2006/95/EC)
	EN 60950-1
	EN301489-1 v1.8.1


General Features


The wireless Wi-Fi Device for the Halcyon line is an external module that connects the indoor units to the Wi-Fi network to manage the indoor climate remotely, using a simple smartphone, tablet, or PC via the internet.

Features:

- •Controlled via a webpage or using the iOS or Android app.
- •A wireless (Wi-Fi) device installed in each unit controls operation.
- •Server in the cloud manages the whole process.
- •Turn the mini-split on before arriving home.
- •Change the program if the user is arriving home late.
- •Displays current room temperature.
- •Programmable calendar scheduler built-in to program the mini-split in an easy, intuitive way.
- •Available in several languages.
- •Available in Fahrenheit or Celsius.
- •Save money without losing comfort.
- •Get instant alarm notifications.
- •2 year warranty
- •Interaction with Geo-localization, Weather Forecast, Voiceover, Voice Commands, Mail, Push Notifications, and many more.





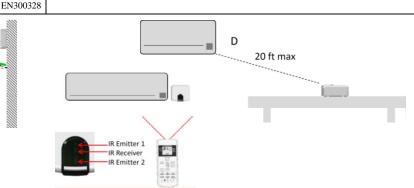







EN301489-17 v2.1.1



Malcyon >



Submittal Data: FJ-RC-WIFI-1NA

Model Compatibility

Туре	Indoor unit Model	Required interface module
Compact Wall Mounted (ASU)	7, 9, 12, RLF	N/A
	7, 9, 12, RLF1	
Wall Mounted (ASU)	9, 12, 15 RLS2	
	9, 12, 15 RLS3	
Wall Mounted (ASU)	18, 24 RLF	
	18CL, 24 CL1	
	30, 36 CLX1	
	30 RLX	
	18, 24 RLB	
	30, 36 RLXB	
Floor (AGU)	9, 12, 15 RLF	
Compact Cassette (AUU)	7, 9, 12, 18, RLF	
Ceiling/Universal (ABU)	36, RSLX	
	18, 24 RULX	
Ducted (ARU)	7, 9, 12, 18, 24 RLF	UTY-LRHUM

Dimensions Unit: in (mm)

